


then twist the crystal cylinder.

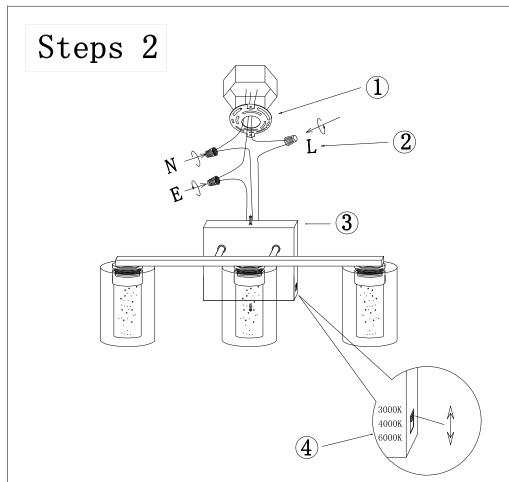

- 1. Assembled the mounting bracket to the ceiling junction box with the screw.
- 2. Connect the power cord out from the ceiling junction box to lamp wires with the lead wire and wire nut. according the color to connect.
- (U.S.-black for "L", white for "N", copper wire for "Ground E")
- 3. Assemble the canopy to the mounting bracket with the screw.
- 4. Turn the switch up and down to adjust the color temperature of the light according to your preference.