

EL2699IC EL2699ICA

3" Low Voltage Double Wall IC Housing
with Thermal Protector. For Use In Insulated
Ceilings. For New Construction



PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

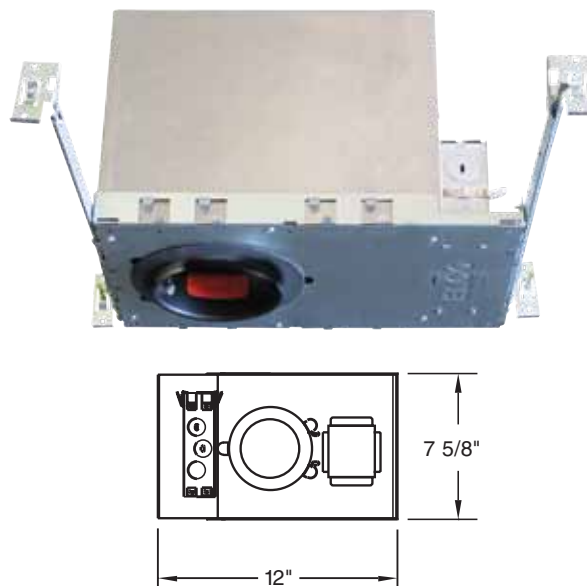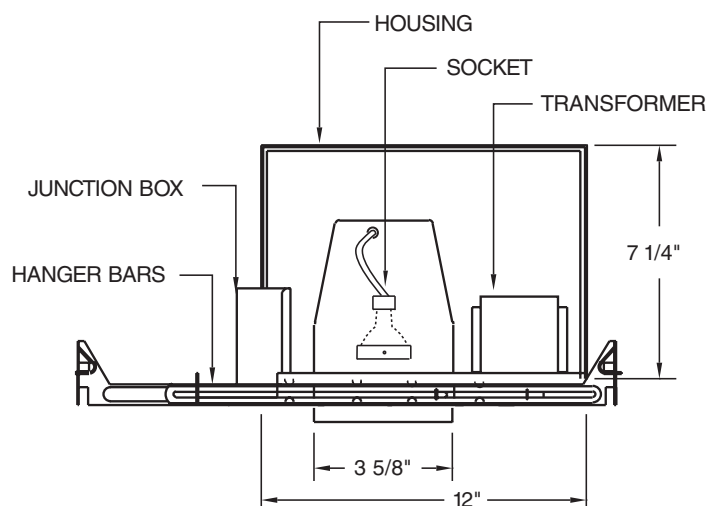

PRODUCT SPECIFICATIONS

Housing Features: For use in insulated ceilings. Integral thermal protector guards against improper lamping. Double wall aluminum construction.

The **EL2699IC & EL2699ICA** for use in insulated ceilings.

The **EL2699ICA** housing meets restricted air flow requirements (Per ASTM-E283).

Lamp: 12V, 50W Maximum Bi-Pin; MR16-G5.3 Base

Lamp Holder: GU5.3 Bi-Pin Socket with reflector

Trim Ring: Polycarbonate trim ring, metal trim ring, designed to conceal ceiling cut-out.

EL2699ICA complies with California Title 24, IECC and Washington state Energy code requirements

Transformer: 120V/12V/50W Magnetic AC Type

Note: Use only dimmers specifically designed for used with magnetic transformer. Low voltage luminaries may produce audible sound when used with dimmers.

INSTALLATION

Junction Box: Pre-wired junction box provided with 1/2" and 3/4" knockout. U.L. listed/C.U.L. listed: for through branch wiring, maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out). Junction box provided with removable access plates.

Mounting: Hanger bars span 24" joists and can be repositioned 90 degrees

Mounting Frame: Stamped galvanized steel material and painted for corrosion resistance.

Labels:

- U.L. listed for damp locations
- U.L. listed for feed through
- U.L. listed for direct contact with insulation

CATALOG NUMBER

Example: EL2699IC - EL2621C

See trims page for variety of trims available.