


### Features

- Acrylic
- Six transducers and a control amplifier with 25' (7.6 m) of wiring
- User-friendly high-resolution color touch screen (in polished chrome)
- 122 BubbleMassage™ airjets
- With Zones of Control™ feature
- Blower motor with 300 W heater
- Slotted overflow for maximum bathing depth
- Molded lumbar support for comfort
- Available with four chromatherapy lights and Bask™ heated surface with three temperature settings [-GVBCW]
- Drop-in or under-mount installation
- Reversible drain
- 66" (1676 mm) x 32" (813 mm) x 22" (559 mm)

### VIBRACOUSTIC® BUBBLEMESSAGE™ BATH K-1822-GVB ALSO K-1822-GVBCW

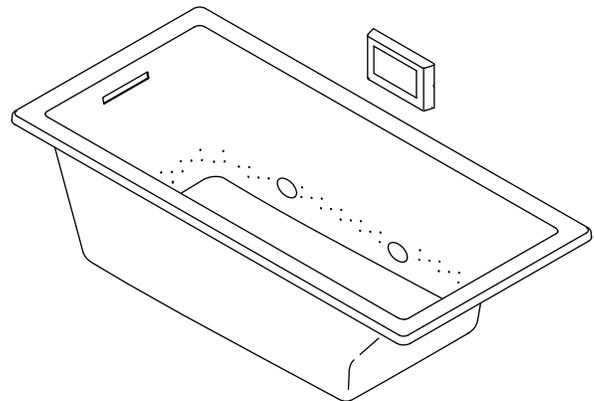

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7/CSA B45.10
- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- UL 1795

### Colors/Finishes

- 0: White
- CP: Polished Chrome
- BN: Brushed Nickel
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-1822-GVB	VibrAcoustic BubbleMassage bath	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1822-GVBCW	VibrAcoustic BubbleMassage bath with Bask and chromatherapy (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
<b>Required Accessories</b>			
K-7271	Clearflo slotted overflow brass bath drain <b>OR</b>	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
<b>Optional Accessories</b>			
1172315	VibrAcoustic interface mounting plate (non-CP finish) <b>(cont.)</b>	<input type="checkbox"/> BN	

### Product Specification

The acrylic VibrAcoustic bath shall be 66" (1676 mm) in length, 32" (813 mm) in width, and 22" (559 mm) in height. Bath shall feature six transducers and a control amplifier with 25' (7.6 m) of wiring. Bath shall feature a user-friendly high-resolution color touch screen (in polished chrome). Bath shall have blower motor with 300 W heater, 122 BubbleMassage airjets, and Zones of Control. Bath shall feature slotted overflow for maximum bathing depth, and molded lumbar support for comfort. Bath shall be available with four chromatherapy lights and Bask heated surface with three temperature settings [-GVBCW]. Bath shall be for drop-in or under-mount installation. Bath shall have reversible drain. Bath shall be Kohler Model K-1822-\_\_\_\_\_-\_\_\_\_\_.

# UNDERScore®

K-550

(cont.) Under-mount kit

☐ NA

## Technical Information

Fixture: Approx. measurements for comparison only.				
Bathing well:				
Basin, bottom	44-1/2" (1130 mm) x 22-5/16" (567 mm)			
Basin, top	59-5/8" (1514 mm) x 25-1/2" (648 mm)			
Weight	121 lbs (54.9 kg)			
To overflow:				
Water depth	18" (457 mm)			
Capacity	85.8 gal (325 L)			
Drop-in cutout				
64-1/2" (1638 mm) x 30-1/2" (775 mm)				
Blower motor/control	300 W	120 V	60 Hz	10 A
Amplifier	15 W (per channel)	120 V	50/60 Hz	-
Heater	65 W	120 V	60 Hz	0.5 A

**Required Electrical Service:** Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):  
Blower motor/heater/amplifier: 120 V, 15 A, 60 Hz

## Installation Notes


Install this product according to the installation guide. Ensure that the bath, user interface, amplifier, and transducers are functional before completing the installation.

Control amplifier fits 16" (406 mm) center studs. 25' (7.6 m) cables are included.

Locate the bath within 24" (610 mm) of a GFCI-protected 120 V, 15 A grounded electrical outlet. A second grounded outlet within the wall framing must be within 24" (610 mm) of the planned control amplifier. One electrical service may be used for the entire bath and related electrical components.

Hot water supply should be 70% of capacity or greater. Installations will vary.

Floor support under bath must provide for a minimum of 56.7 lbs/square foot (277 kg/square meter) loading.

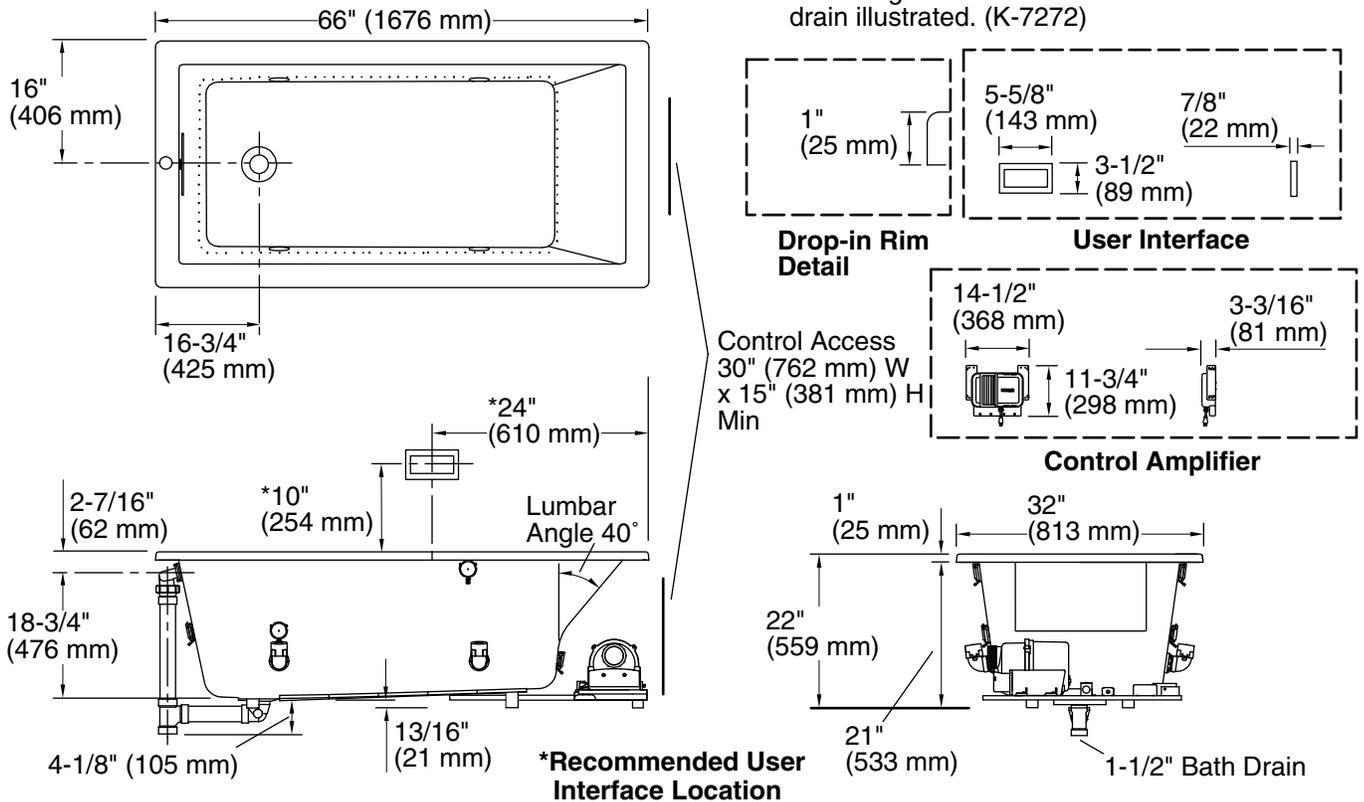

## Product Diagram