
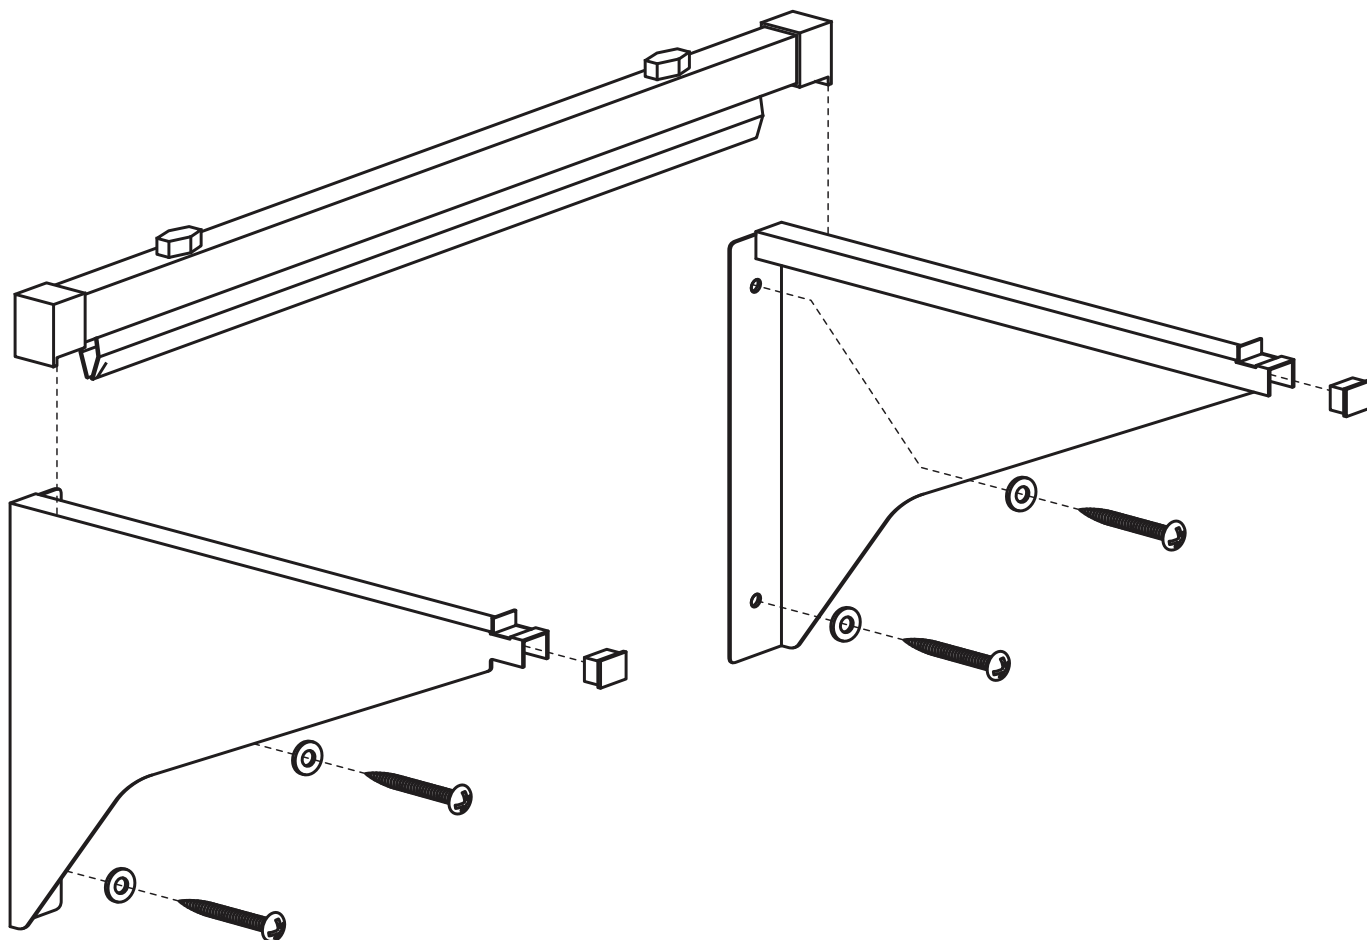



## Assembly Instructions

for MODEL **616**



### PARTS LIST

| Item | Description                                                                         |               | QTY. |
|------|-------------------------------------------------------------------------------------|---------------|------|
| A    |  | Right Bracket | 1    |
| B    |  | Left Bracket  | 1    |

| Item | Description                                                                           |                | QTY. |
|------|---------------------------------------------------------------------------------------|----------------|------|
| C    |  | Channel Cap    | 2    |
| D    |   | Mounting Screw | 4    |
| E    |  | Washer         | 4    |


Tools required for assembly: **Phillips screwdriver**

## Assembly Instructions

for MODEL **616**

Installation recommended on wall studs or solid – back wall surface.

1. Determine and mark wall bracket screw location according to your clamp dimensions. Use chart to determine the distance between your brackets.

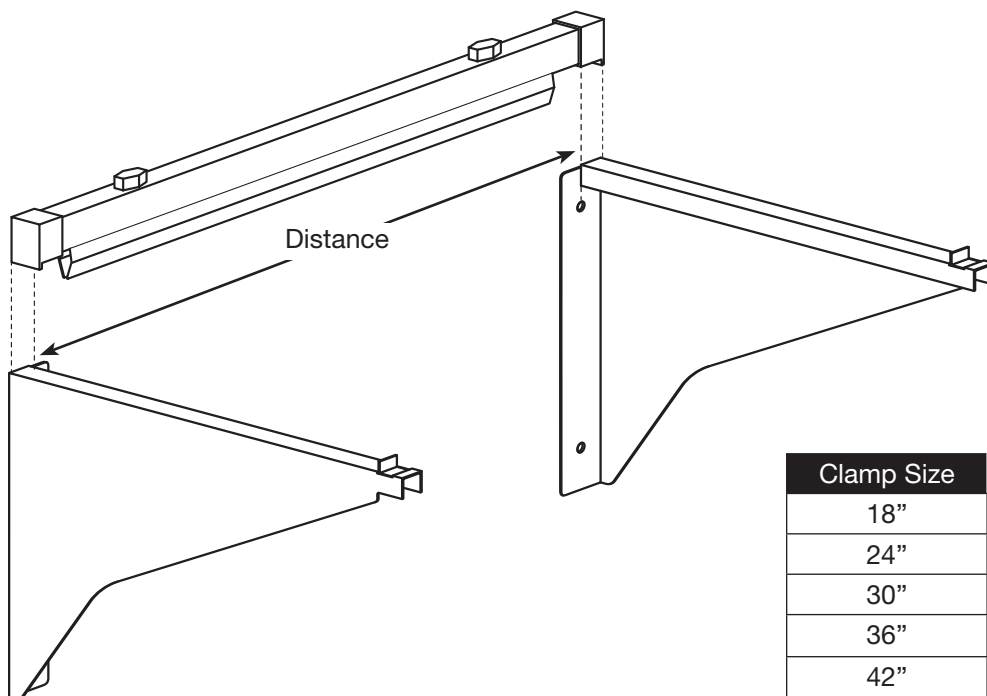

| Clamp Size | Distance |          |
|------------|----------|----------|
| 18"        | 18 1/16" | 45,9 cm  |
| 24"        | 24 1/16" | 61,1 cm  |
| 30"        | 30 1/16" | 76,4 cm  |
| 36"        | 36 1/16" | 91,6 cm  |
| 42"        | 42 1/16" | 106,8 cm |

2. Screw left and right brackets into wall.

