

Project: _____

Fixture Type: _____

Location: _____

Contact: _____

Linear vanity

Wall mounted • Dry location listed



Description:

A tubular design pairs with a geometric back plate and mesh accents to create Truss - a fixture than can be mounted horizontally or vertically. Circular etched opal glass contains an integrated LED source to provide a variety of energy and cost savings benefits for the homeowner. Modern style and continuous illumination are ideal for a variety of bath and vanity settings. LED source features 3000K and 90+ CRI benefits, as well as a lifespan of more than 40,000 hours.


Specifications:

- Brushed Nickel (plated)
- Steel Construction
- Etched White glass diffuser
- Tubular design pairs with a geometric back plate and mesh accents.
- Can be mounted horizontally or vertically.
- Circular etched opal glass contains an integrated LED source.
- 1443 lumens 38 lumens/watt (delivered).
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" octagonal recessed outlet box
- Mounting bracket for outlet box included
- 6" of wire supplied
- Complies with "Americans with Disabilities Act" - ADA

Performance:

| | |
|------------------------|-------------------------------------|
| Number of Modules | 1 |
| Input Power | 35w |
| Input Voltage | 120 V |
| Input Frequency | 60 Hz |
| Lumens/LPW (Delivered) | 1443/38.7 (LM-79) |
| CCT | 3000 K |
| CRI | 93 |
| Life (hours) | 42,000 (L70/TM-21) |
| FCC | Meets FCC Title 47, Part 15 Class B |
| Min. Start Temp | -30 °C |
| Max. Operating Temp | 30 °C |
| Warranty | 5 year warranty |
| Labels | cETLus Dry location listed |

Images:

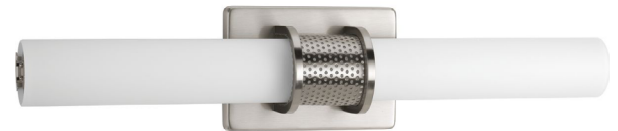


Dimensions:

Width: 22-1/2"

Depth: 3-7/8"

Height: 4-3/4"

H/CTR: 2-3/8" (mounted horizontal)

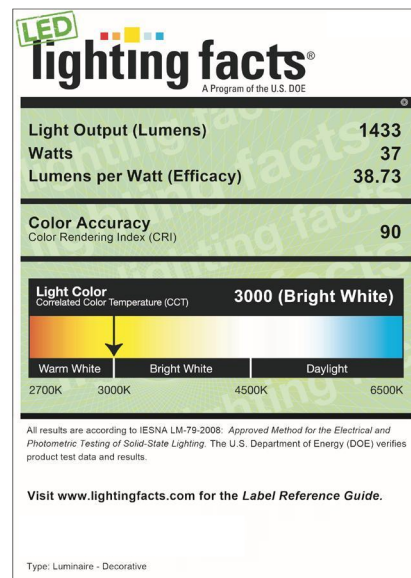




Photometrics:

| | |
|-----------------------|-------------------------------------|
| Input Voltage | 120 V |
| Input Frequency | 60 Hz |
| Input Current | 0.292 A |
| Input Power | 35 |
| Power Factor | Greater than 0.90 |
| THD | <20% |
| FCC | Meets FCC Title 47, Part 15 Class B |
| Operating Temperature | -30 °C to 30 °C |
| Dimming | Yes* |

*See Dimming Notes for more information

LED Light Engine: 3000 K 93
System Wattage: 35
Fixture delivered lumens: 1443
Fixture Efficacy: 38.7
Spacing Criteria: 2.0 | 1.3 | 1.0

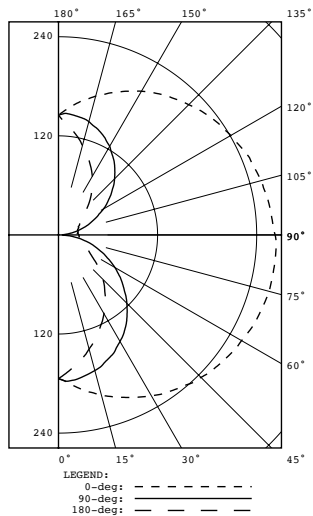

CANDELA DISTRIBUTION

| CANDELA | DISTRIBUTION | | | FLUX | | |
|---------|--------------|------|------|-------|-------|-----|
| | 0.0 | 45.0 | 90.0 | 135.0 | 180.0 | |
| 0 | 174 | 174 | 174 | 174 | 174 | |
| 5 | 182 | 181 | 177 | 166 | 164 | 17 |
| 15 | 201 | 192 | 170 | 149 | 143 | 48 |
| 25 | 217 | 197 | 158 | 130 | 121 | 75 |
| 35 | 232 | 199 | 140 | 107 | 98 | 96 |
| 45 | 244 | 198 | 117 | 83 | 76 | 108 |
| 55 | 253 | 192 | 92 | 60 | 53 | 112 |
| 65 | 260 | 186 | 65 | 38 | 39 | 109 |
| 75 | 264 | 180 | 40 | 26 | 31 | 104 |
| 85 | 264 | 174 | 14 | 18 | 25 | 98 |
| 90 | 263 | 173 | 4 | 16 | 24 | |
| 95 | 259 | 170 | 9 | 15 | 23 | 94 |
| 105 | 254 | 170 | 29 | 19 | 24 | 95 |
| 115 | 246 | 171 | 51 | 25 | 28 | 95 |
| 125 | 236 | 172 | 74 | 41 | 34 | 95 |
| 135 | 223 | 174 | 96 | 60 | 51 | 90 |
| 145 | 209 | 174 | 115 | 81 | 71 | 80 |
| 155 | 192 | 170 | 131 | 102 | 92 | 63 |
| 165 | 174 | 163 | 142 | 121 | 112 | 40 |
| 175 | 155 | 152 | 147 | 138 | 133 | 14 |
| 180 | 145 | 145 | 145 | 145 | 145 | |

ZONAL LUMEN SUMMARY

| ZONE | LUMENS | %FIXT |
|--------|--------|-------|
| 0-30 | 140 | 9.8 |
| 0-40 | 236 | 16.5 |
| 0-60 | 456 | 31.8 |
| 0-90 | 767 | 53.5 |
| 90-120 | 284 | 19.8 |
| 90-130 | 379 | 26.4 |
| 90-150 | 549 | 38.3 |
| 90-180 | 666 | 46.5 |
| 0-180 | 1433 | 100.0 |



Dimming Notes:

This light is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

| |
|--------------------------------------|
| Lutron Diva DVELV-300P |
| Lutron Nova T NTELV-300 |
| Lutron Diva DVELV-300P |
| Luton Caseta |
| Lutron Ariadni AY-600P |
| Leviton Illumatech IPI06-1LZ |
| Lutron Lumea LG-603PG |
| Leviton SureSlide 6672 |
| Leviton SureSlide 6674 |
| Lutron Ariadni AYCL-153P |
| Lutron Skylark Contour CTCL-153P |
| Lutron Diva DVCL-153P |
| Pass & Seymour Harmony DCL453PTCCCV6 |
| Lutron Toggler TGCL-153P |
| Lutron Maestro MACL-153M |
| Lutron Ariadni AYLV-600P |
| Lutron Maestro MA-600 |
| Lutron NOVA T NTLV-600 |
| lutron Maestro MAELV-600 |
| Lutron spacer/system SPSELV-600 |
| Lutron Renoir II AWRMG-EAW |

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.