



# Assembly Instruction

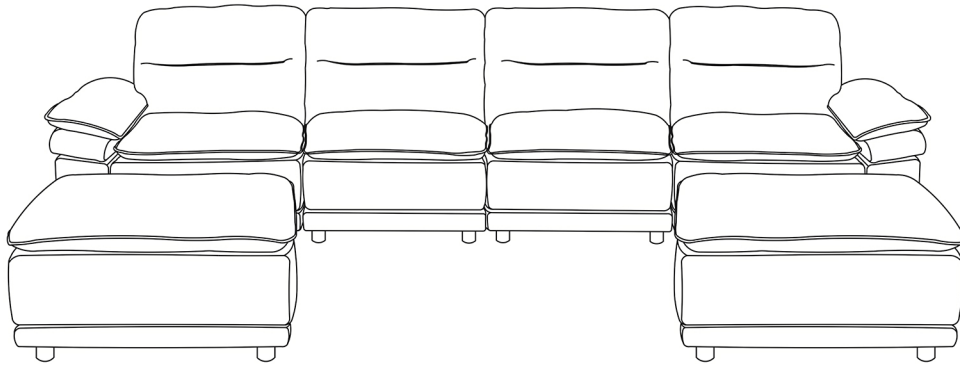


## Friendly Reminder

- 1.This sofa is packed in 5 boxes.Please assemble the sofa after all boxes are received.
- 2.The seat cushions are all vacuum compressed,there will be some wrinkles. please allow the cushions at least 72 hours to be recovered to its original size and the wrinkles will basically disappear.

### Box 1

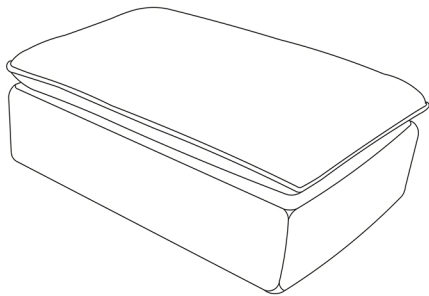

**A.ottoman seat cushion  
x 2pcs**

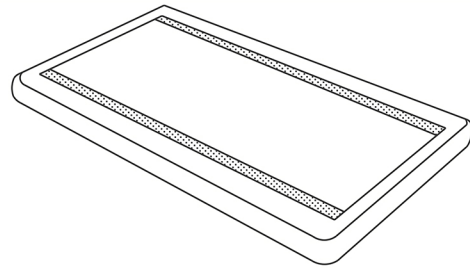


**B.ottoman seat frame  
x2pcs**


### Box 2



**C.seat cushionx2pcs**

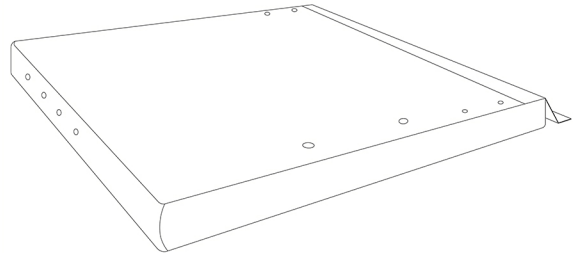


**D.seat frame(Left)x1pcs**

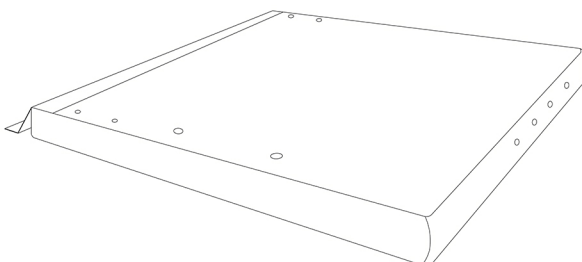


**E.seat frame(Right)x1pcs**

### Box 3

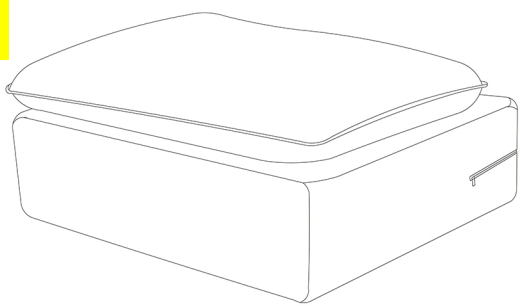


C.seat cushionx2pcs

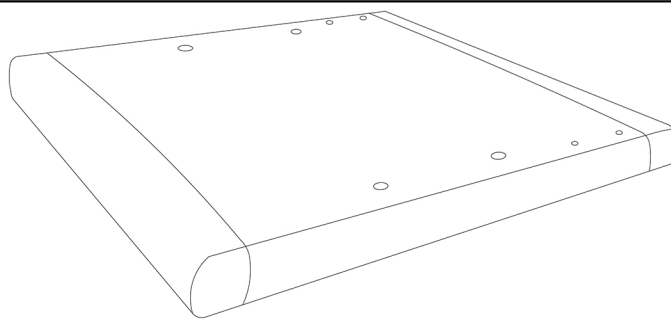


F.seat frame(middle)x2pcs


### Box 4

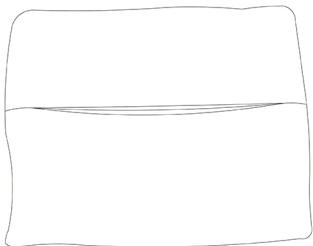


G.back cushionx4pcs

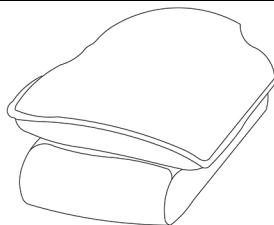


H.arm cushion(Left)  
x1pcs

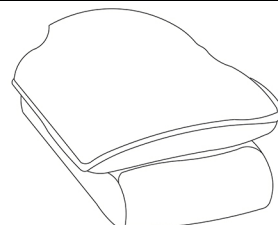


I.arm cushion(Right)  
x1pcs

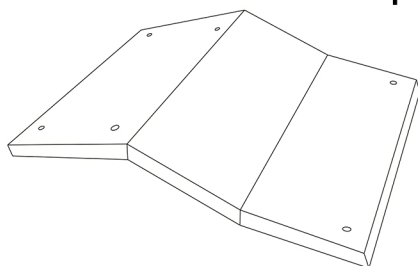


J.Folding armrest panel  
x2pcs

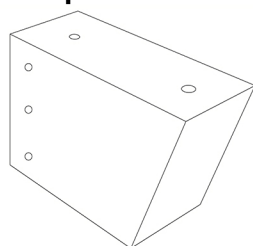


K.armrest frame  
x2pcs

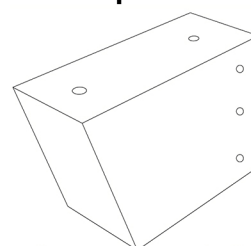

L.armrest frame  
x2pcs

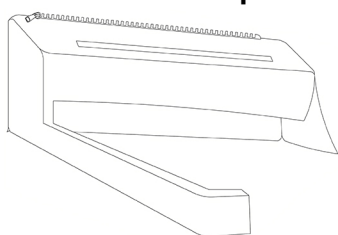


M.arm frame cover  
(Left) x1pcs

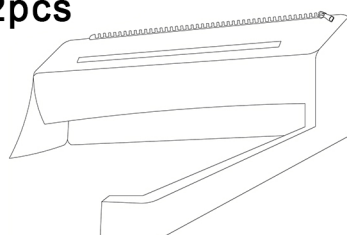


N.arm frame cover  
(Right) x1pcs


### Box 5

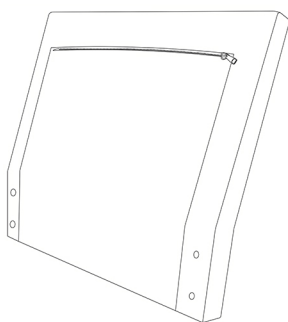


O.back framex4pcs




P.Leg x24pcs

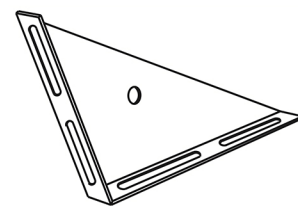


Q.sofa bracket connector  
x8pcs




R.Iron connectorx4pcs




S.sofa connectorx3pcs



T.M6x20MMx60pcs



U.M6x30MMx24pcs




V.M6xØ20MMx84pcs




W.hex key x1pcs



**Step 1. Install the sofa bracket connector(Q) to each back frame(O).**

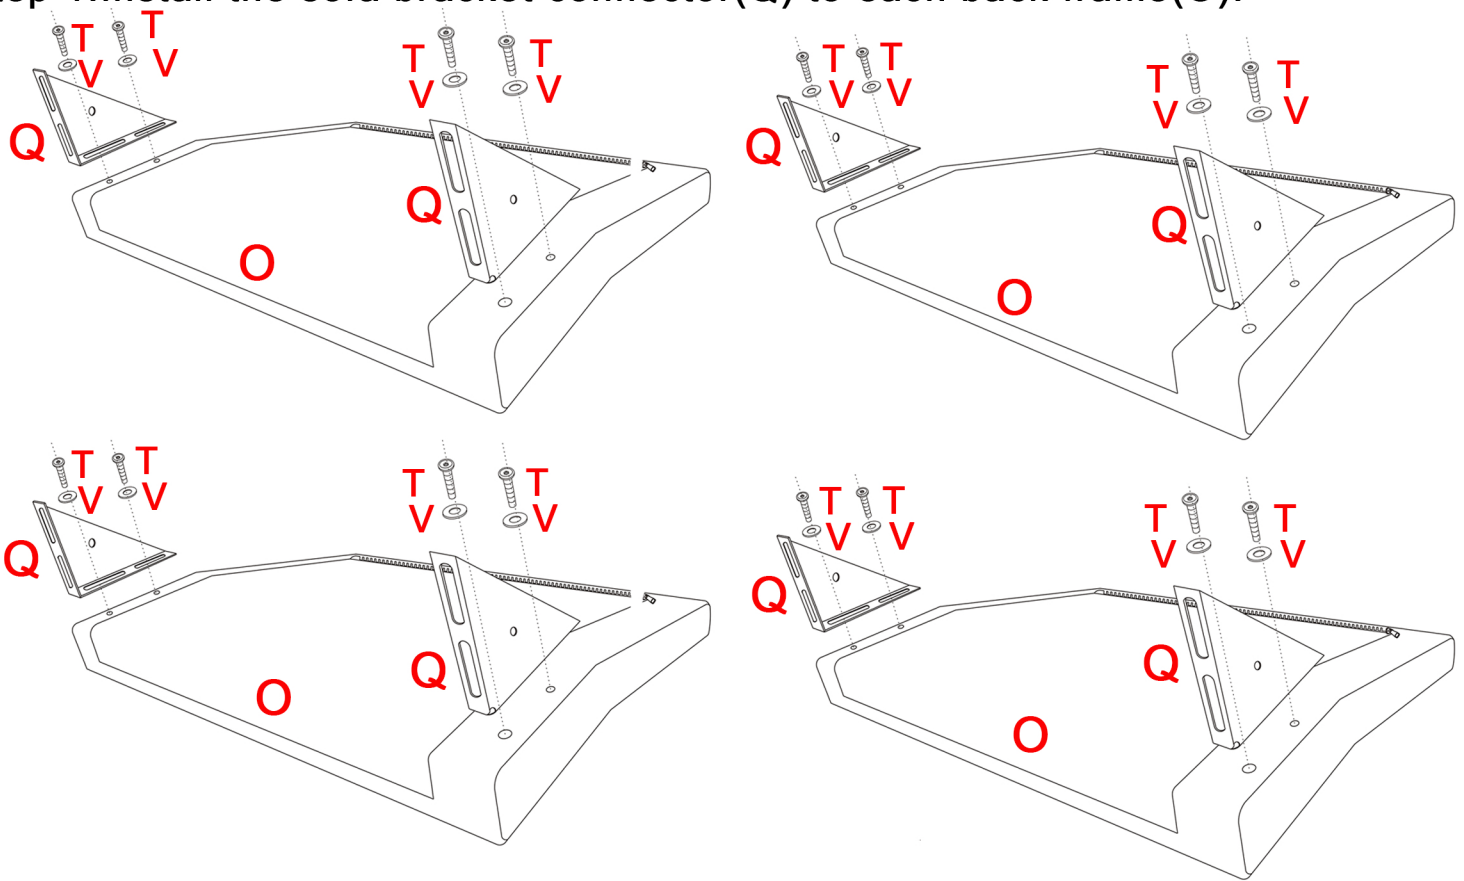

**Step 2. Install the back frame(O) to sofa seat frame(D).&(E).**

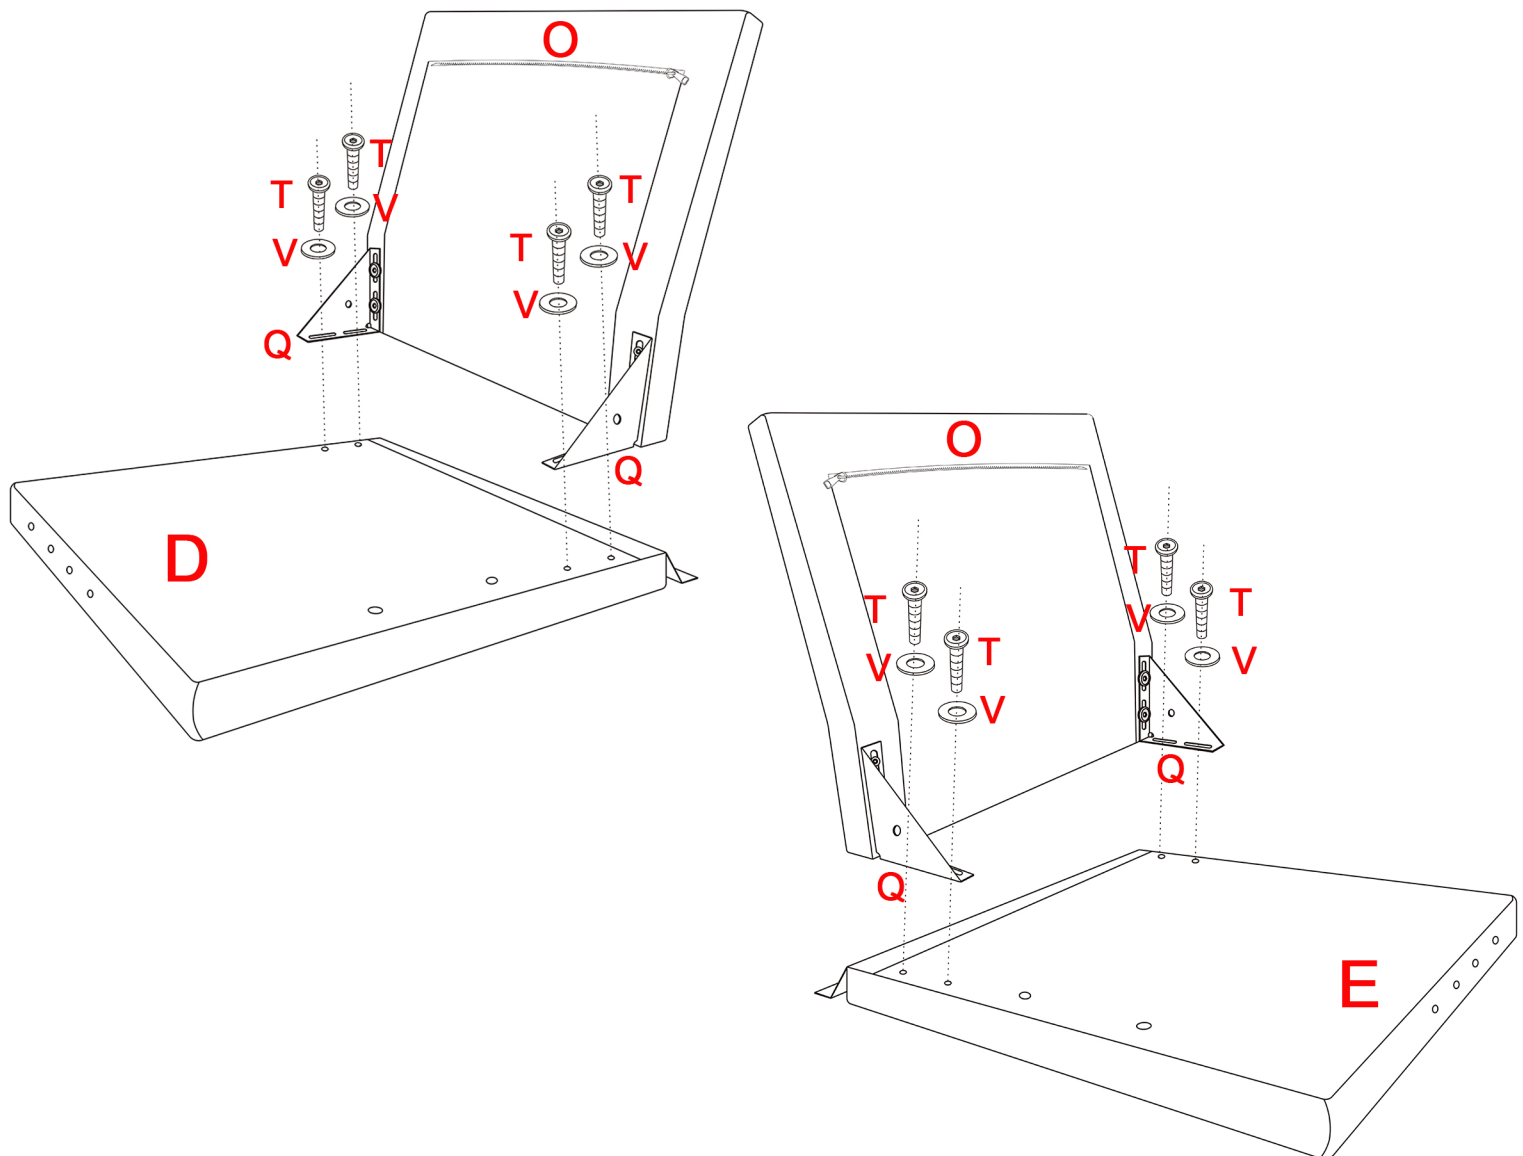


Step 3. Install the folding arm panel(J) to arm frame(K)&(L) step by step.

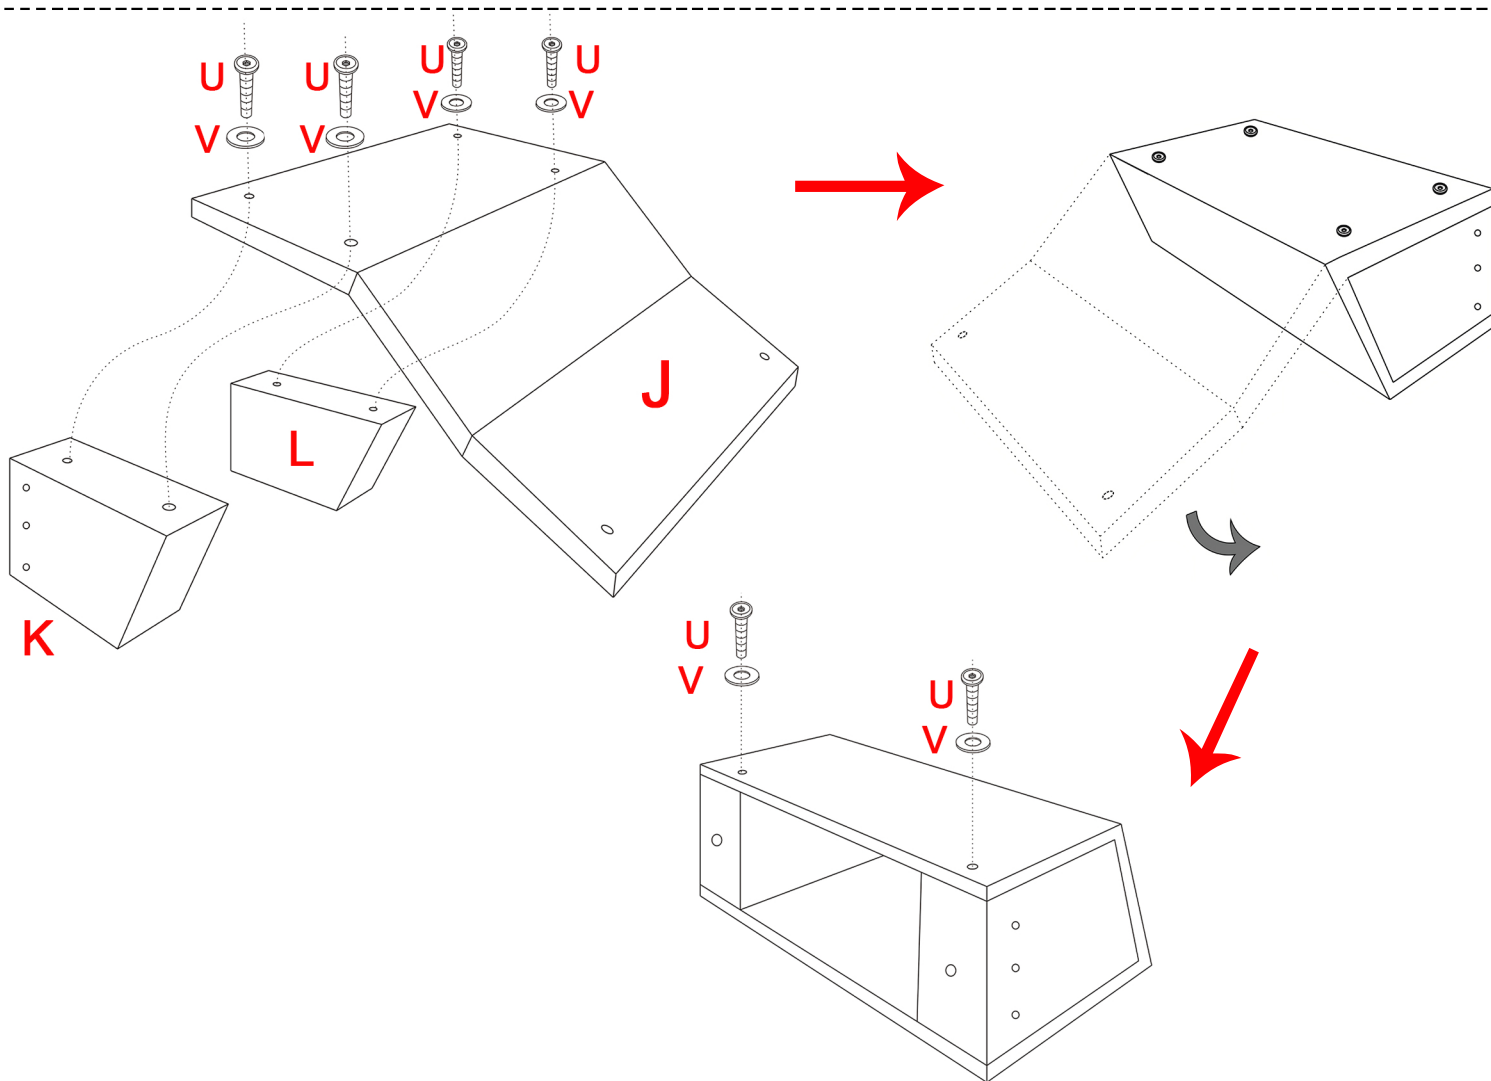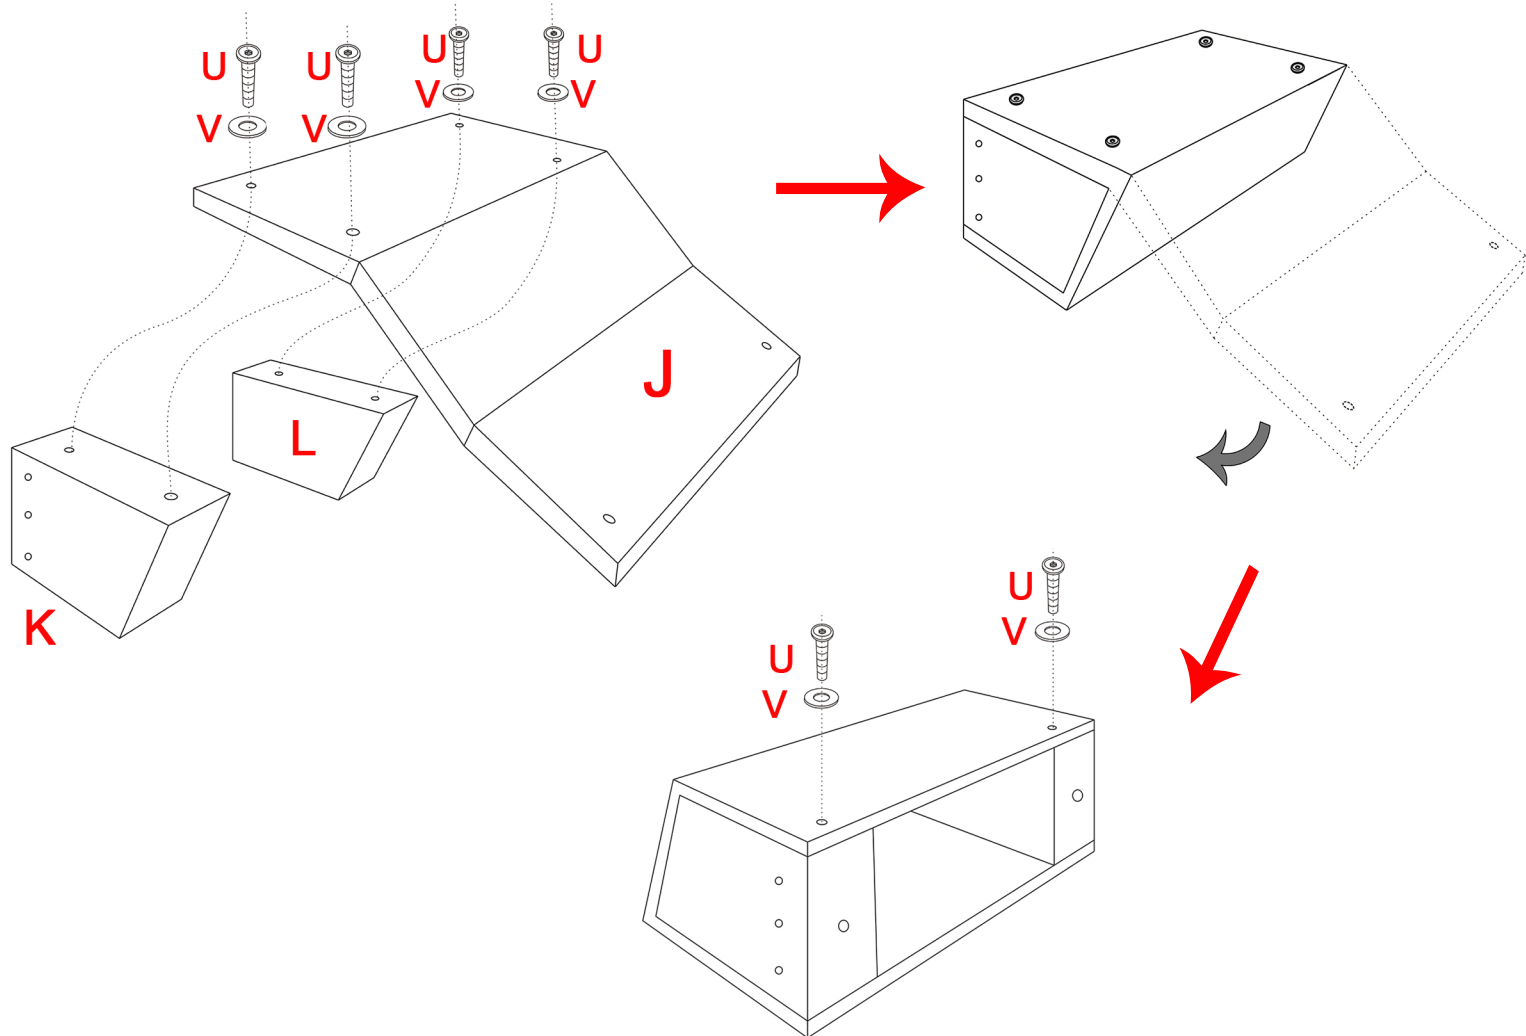





Step 4. ① Connect the front side of the sofa arm frame and the front side of seat frame(D) with iron connector(R), Please keep the bottom of the sofa arm frame and the bottom of the seat frame(D) at the same level.

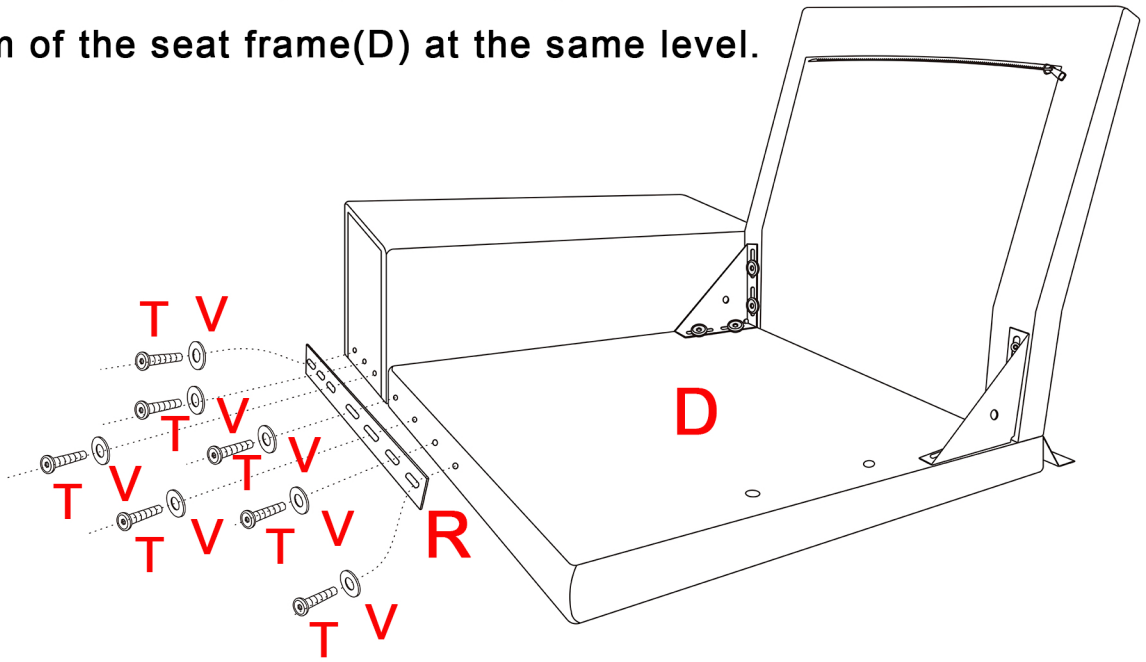


② Connect the back side of the sofa arm frame and the back side of seat frame(D) with iron connector(R), Please keep the bottom of the sofa arm frame and the bottom of the seat frame(D) at the same level.

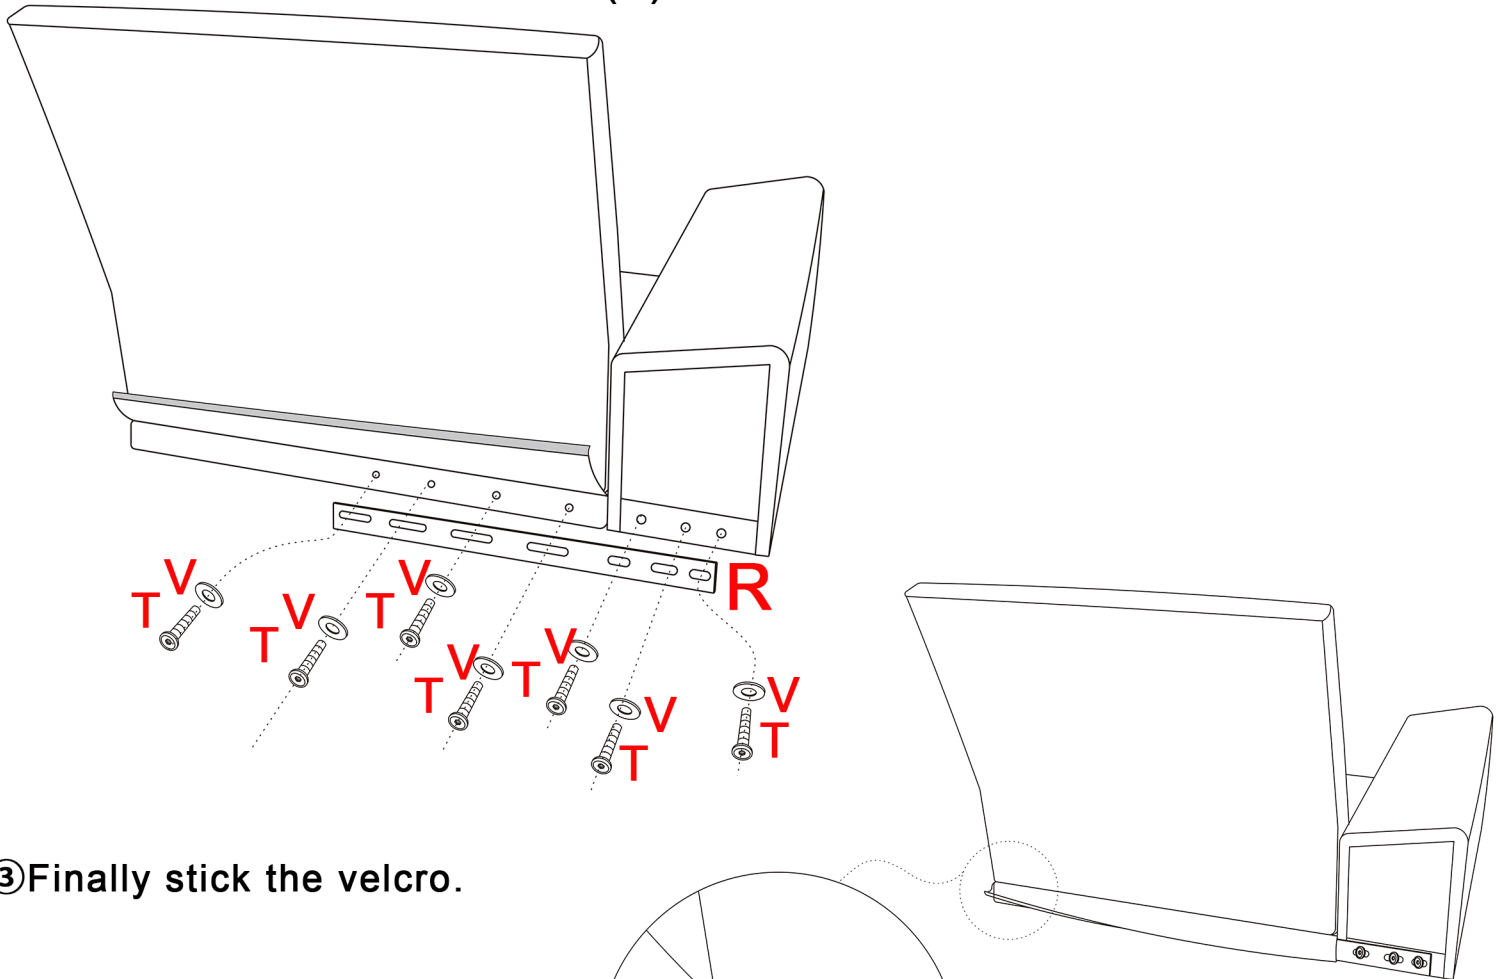


③ Finally stick the velcro.

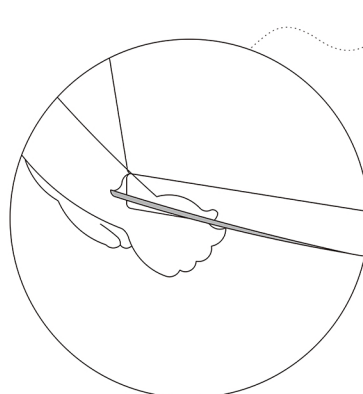


Step 5. ① Covering the arm frame cover(M) to the arm frame and stick the velcro.

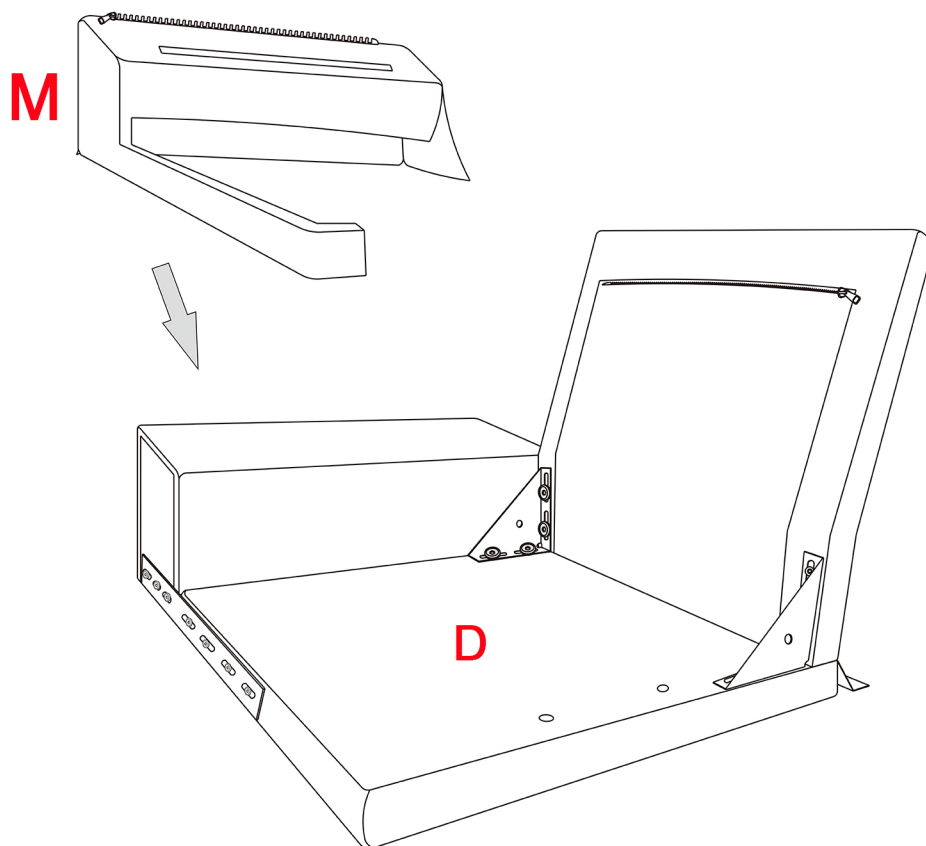


② sticking the velcro and finally install the legs(P).

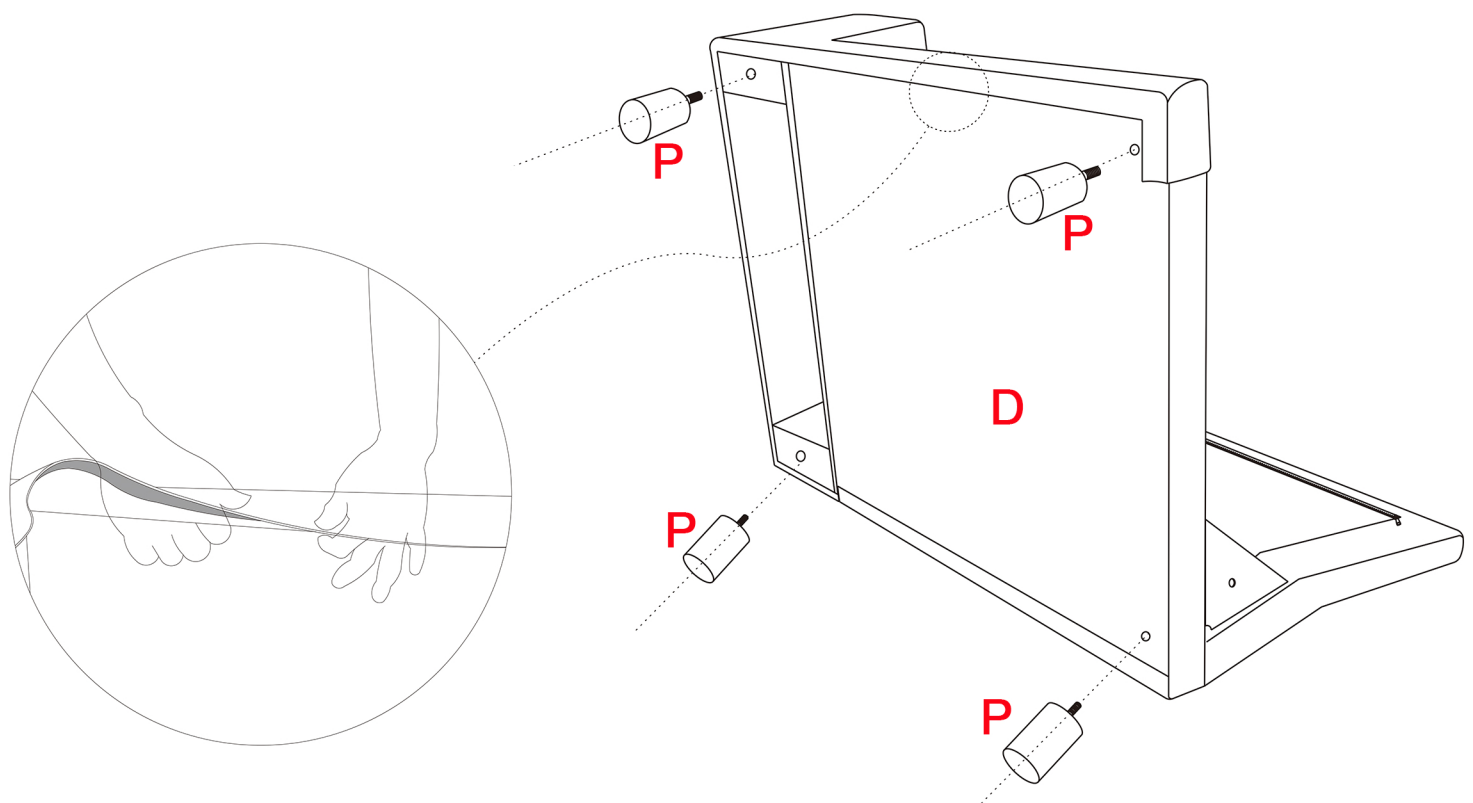

**Step 6. ①** Connect the front side of the sofa arm frame and the front side of seat frame(E) with iron connector(R), Please keep the bottom of the sofa arm frame and the bottom of the seat frame(E) at the same level.

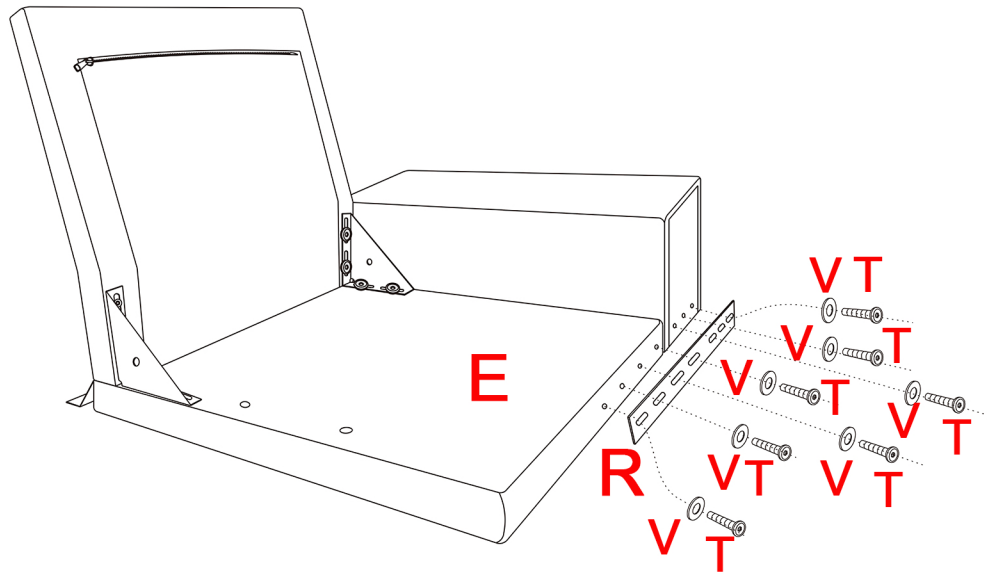


**②** Connect the back side of the sofa arm frame and the back side of seat frame(E) with iron connector(R), Please keep the bottom of the sofa arm frame and the bottom of the seat frame(E) at the same level.

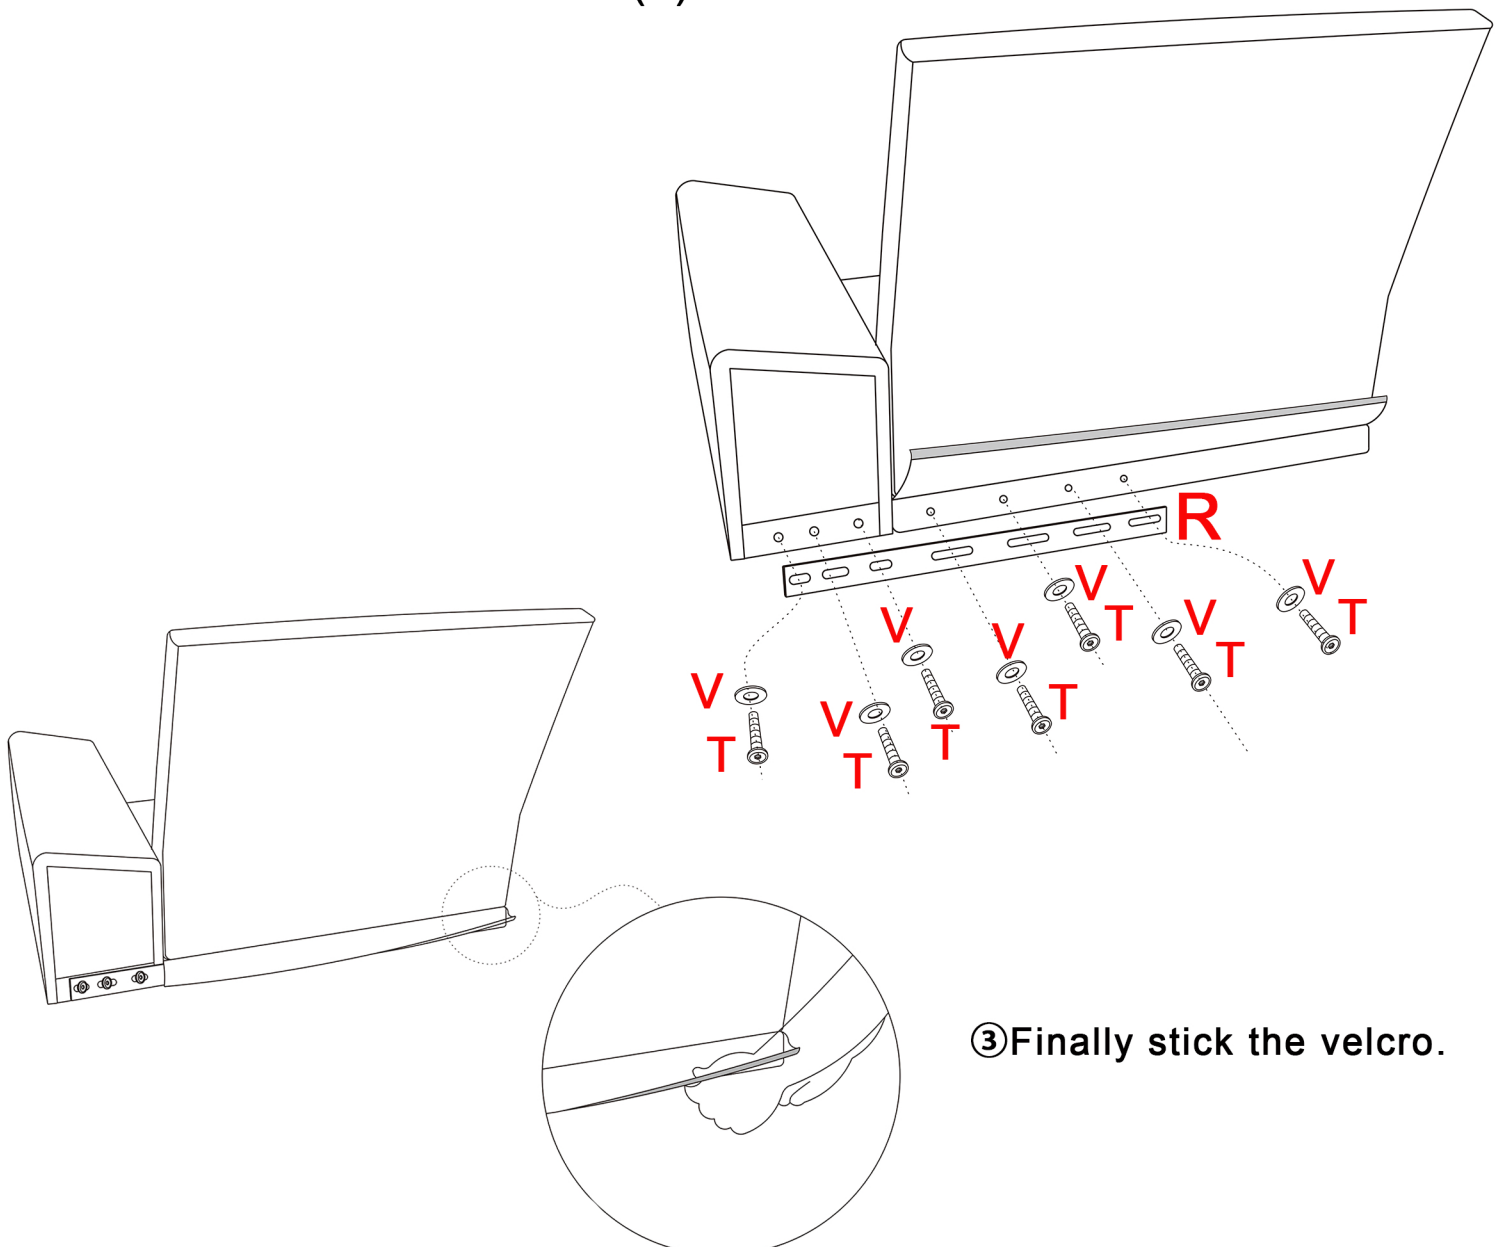


**③** Finally stick the velcro.


Step 7. ① Covering the arm frame cover(N) to the arm frame and stick the velcro.

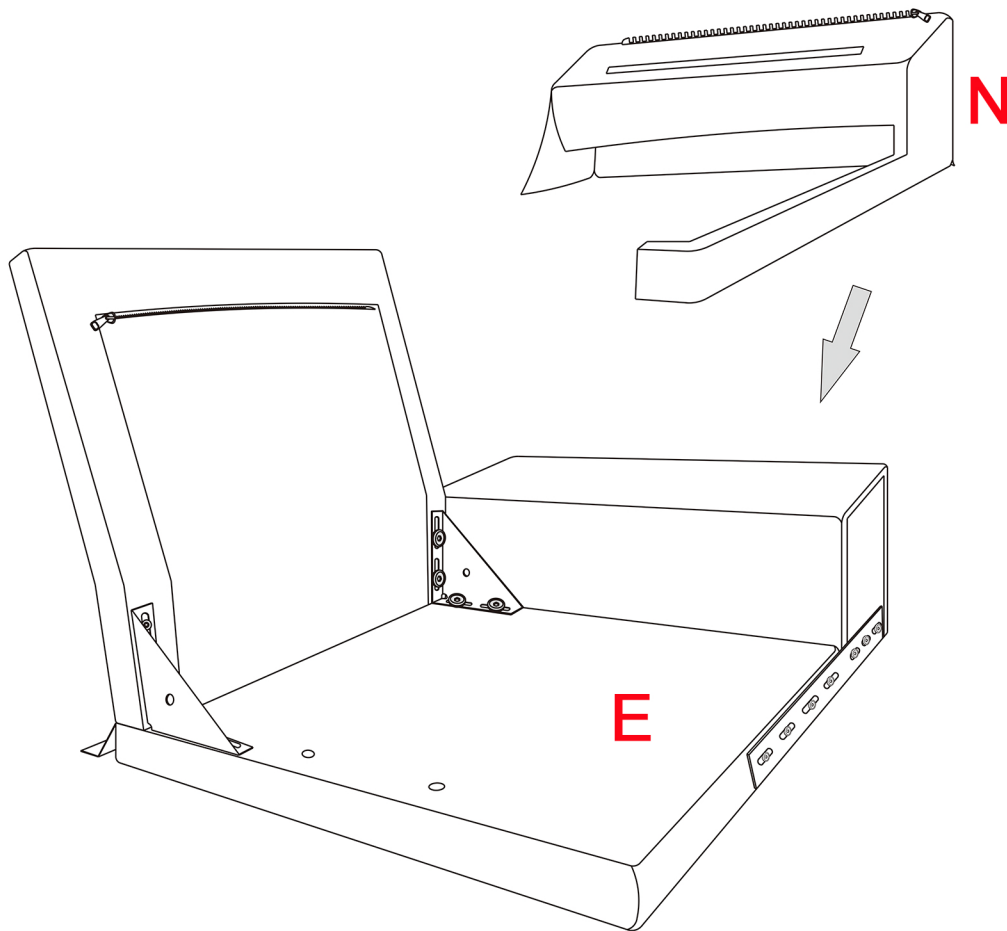


② sticking the velcro and finally install the legs(P).

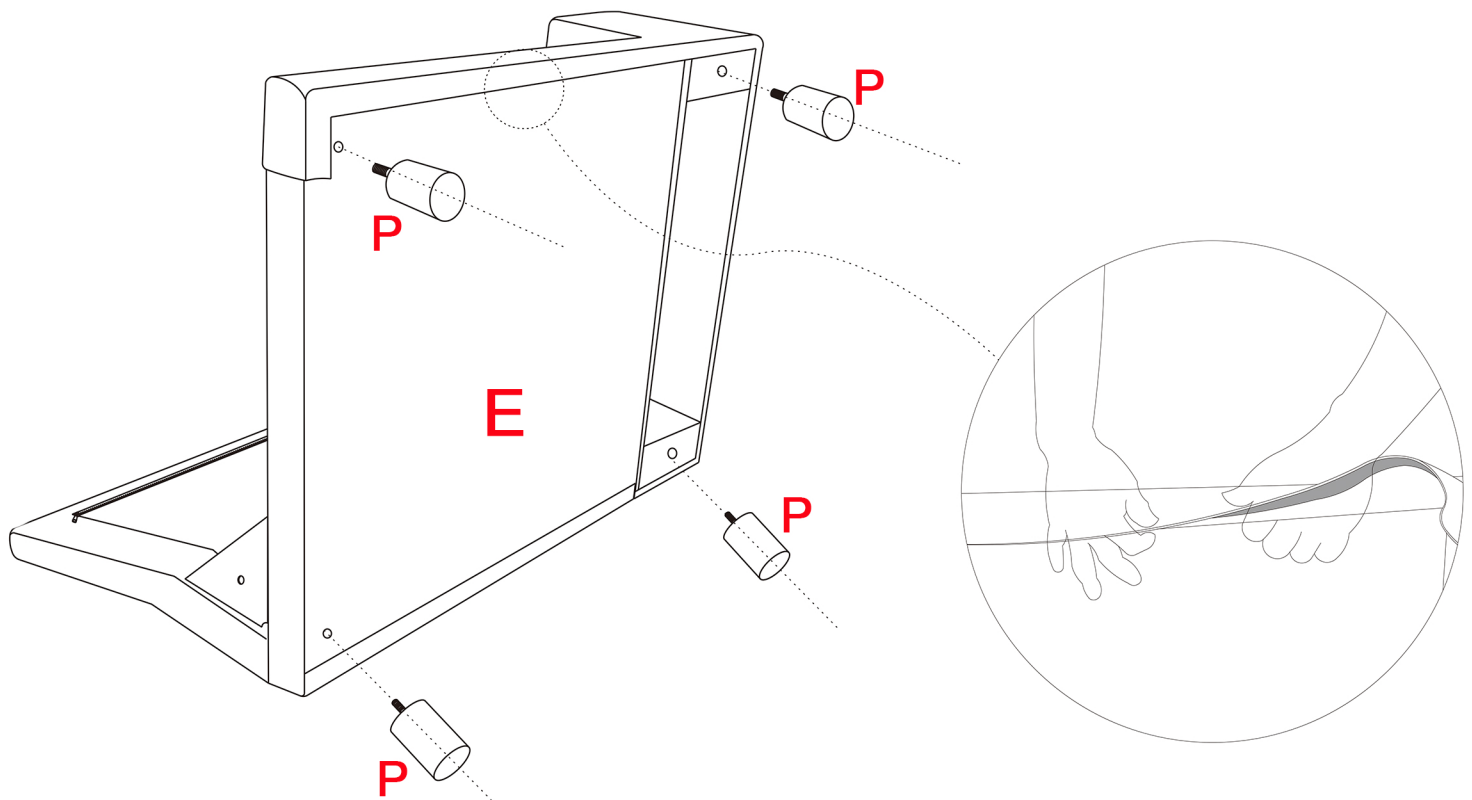


## Step 8. Install the back frame(O) to seat frame(F)

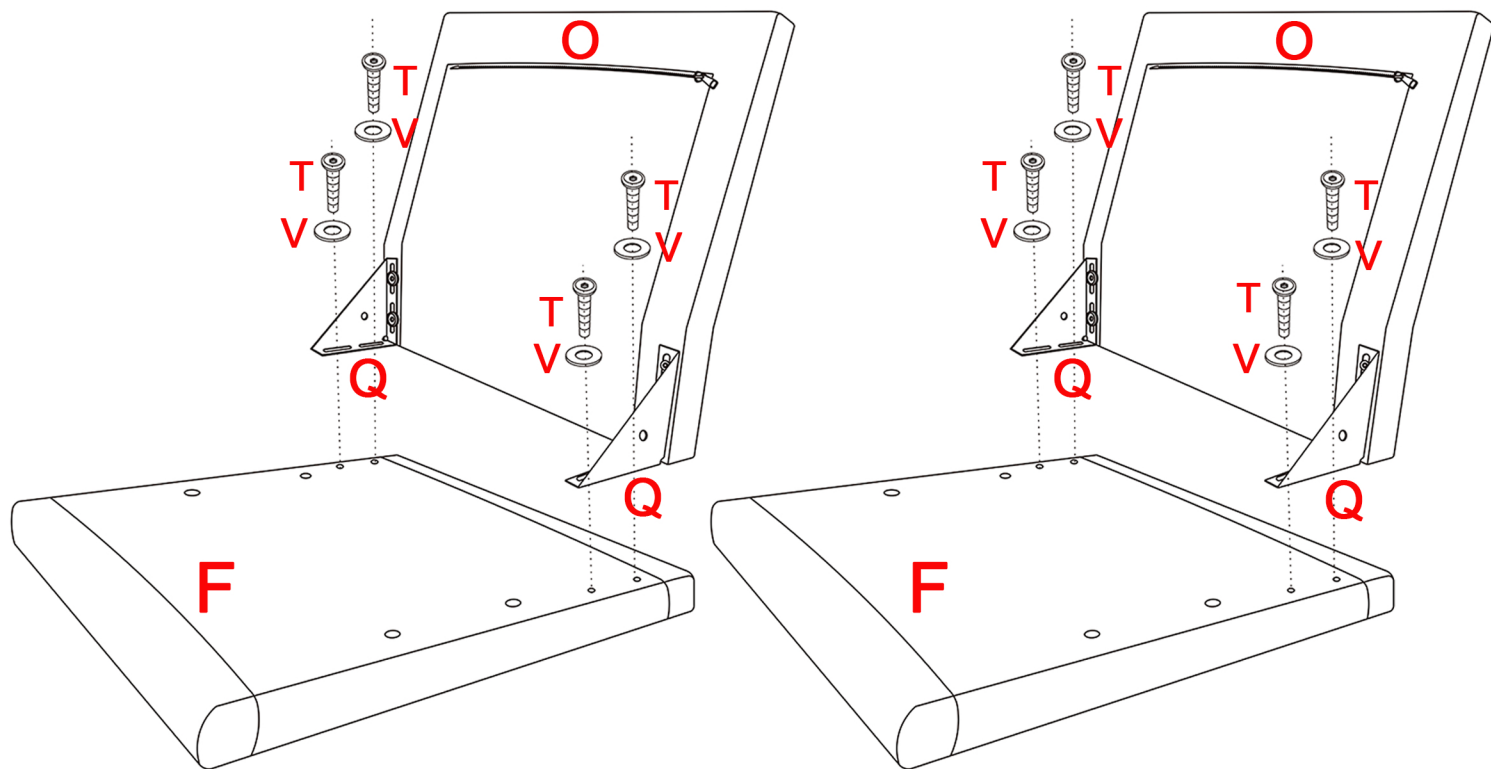


## Step 9. Install the legs (P) to the seat frame (F)

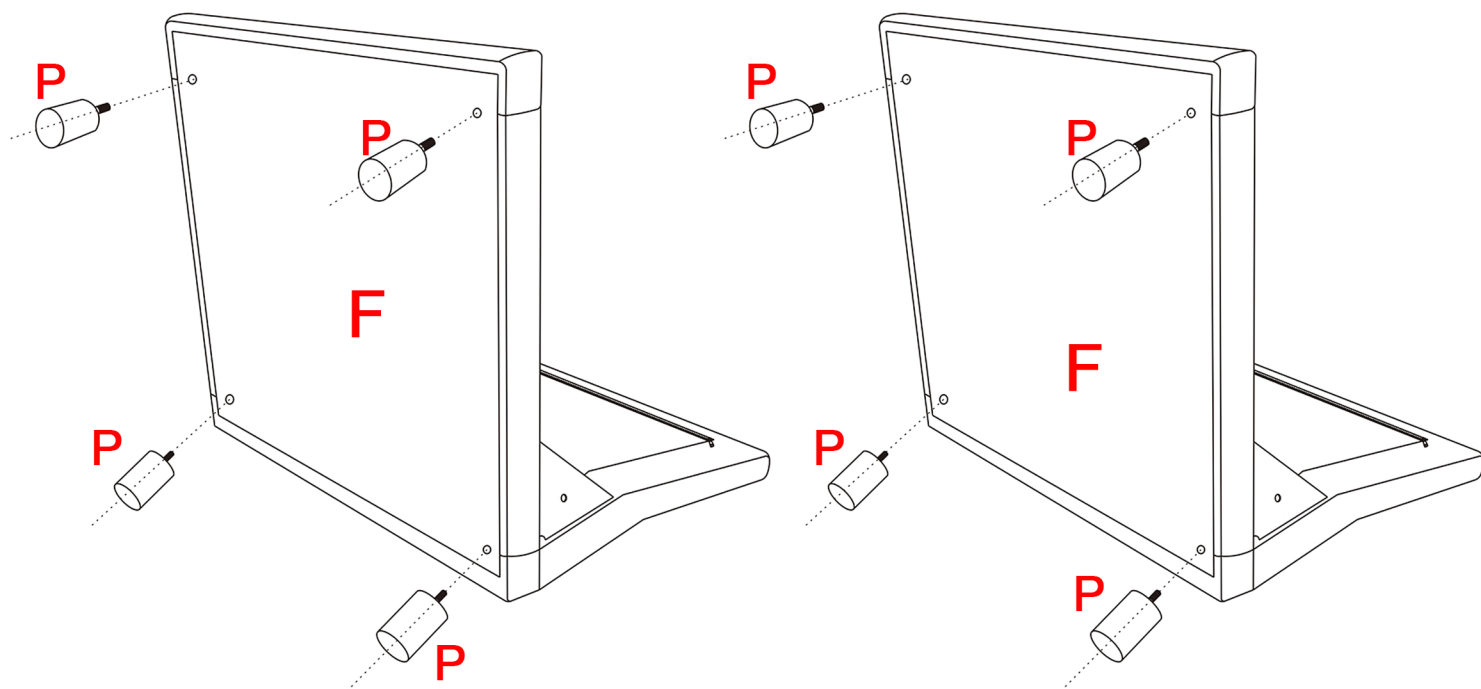

Step 10.Connecting the sofa seat frame with connector(S)

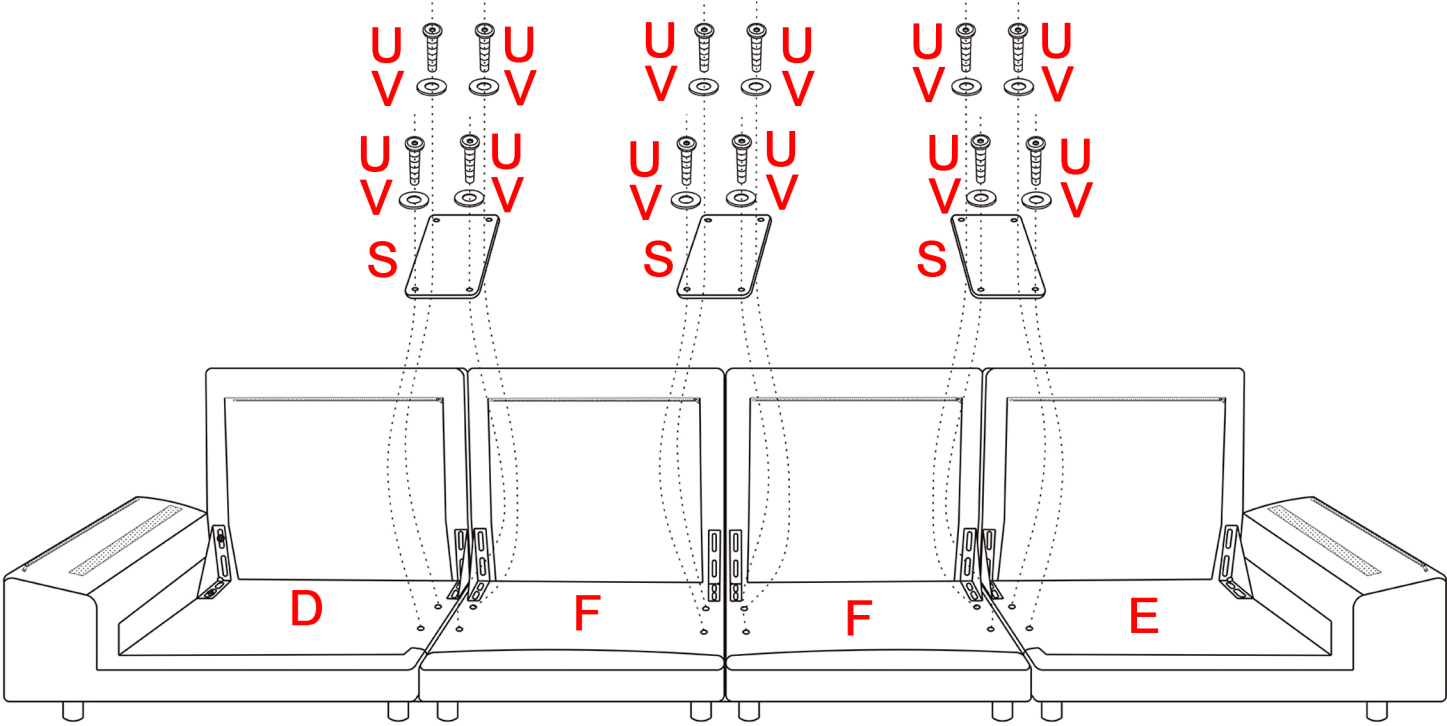


Step 11.Put the seat cushions(C) on top of the seat frame.

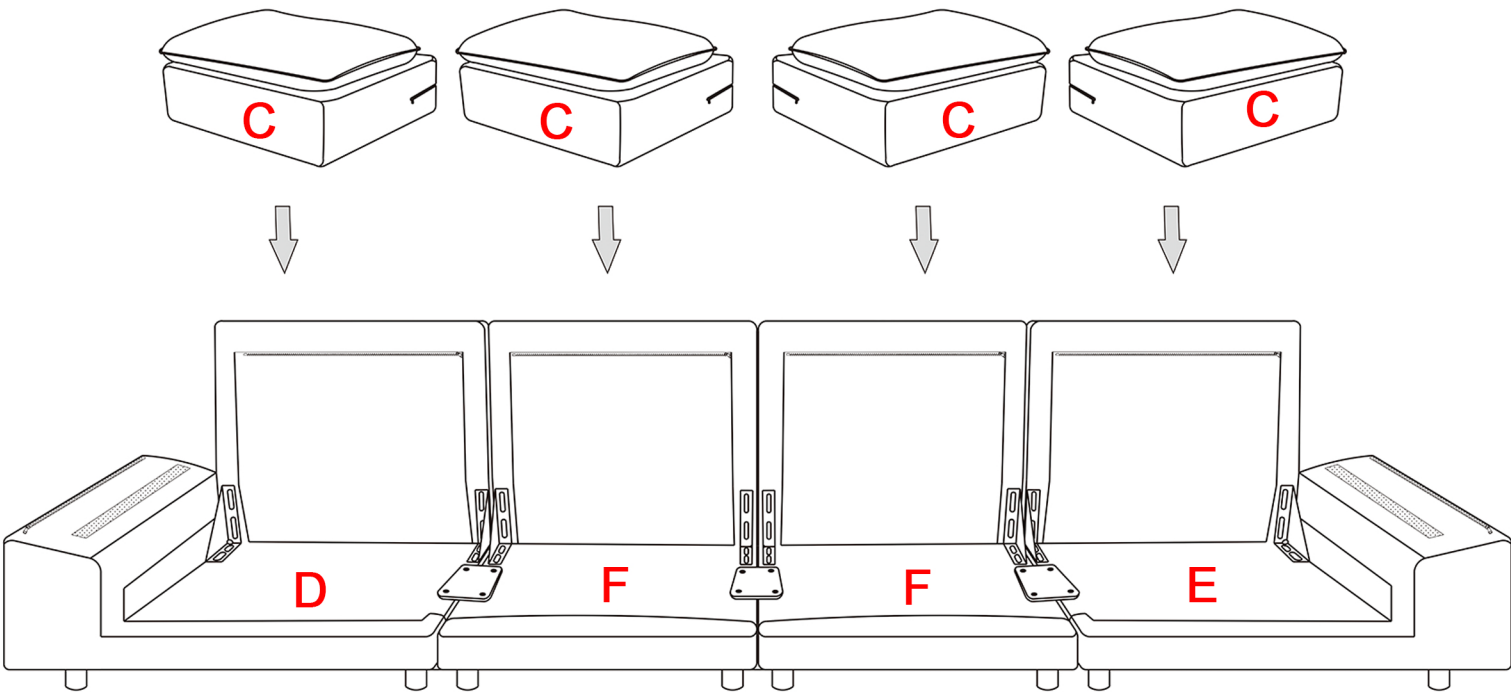






Step 12. Zip up the arm cushion(H)&(I) to each arm frame,then stick the velcro.

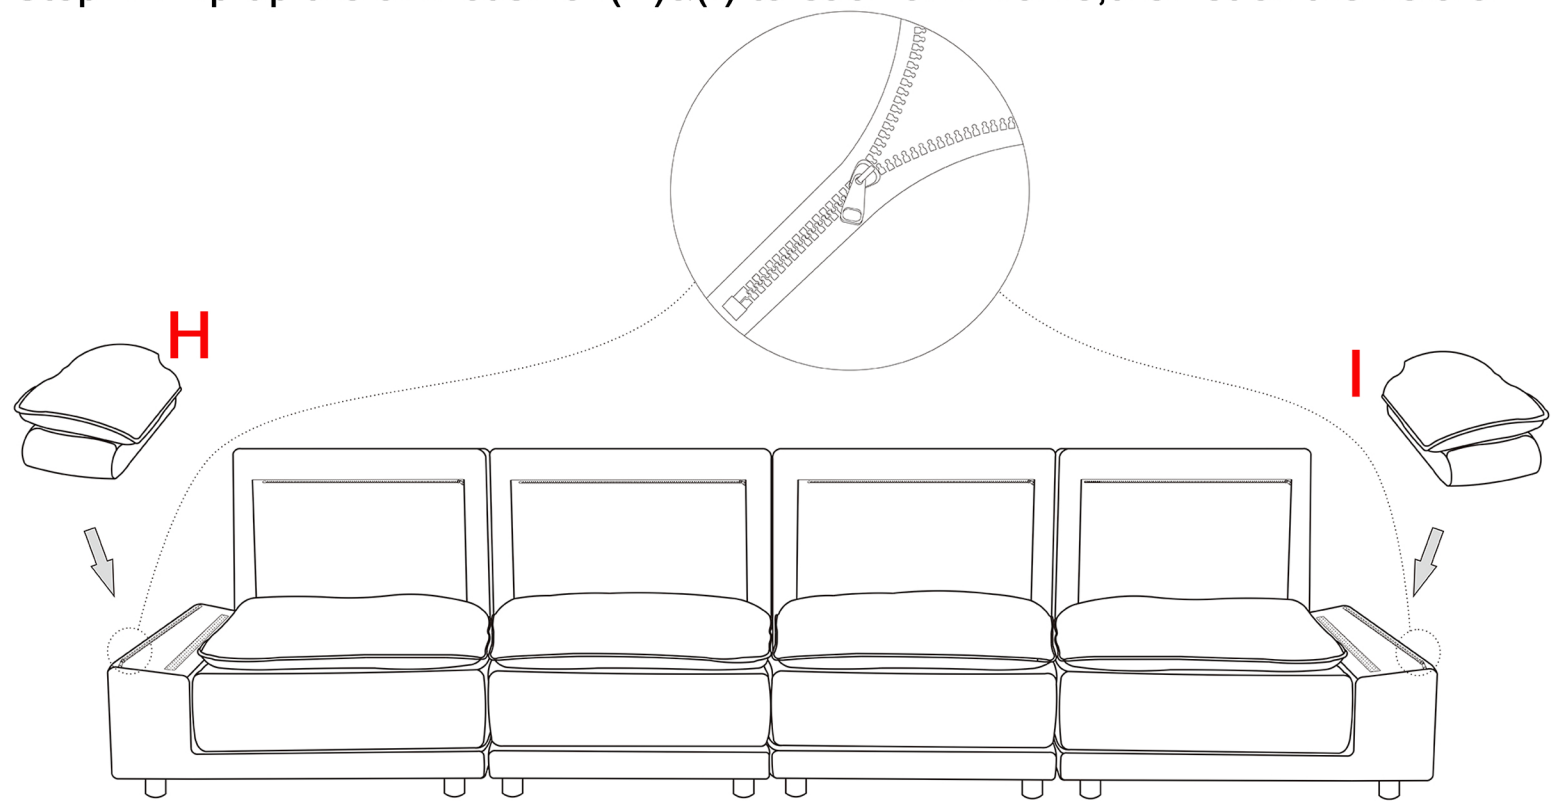

Step 13. Put the back cushion(G) on the sofa and then zip up the back cushions.

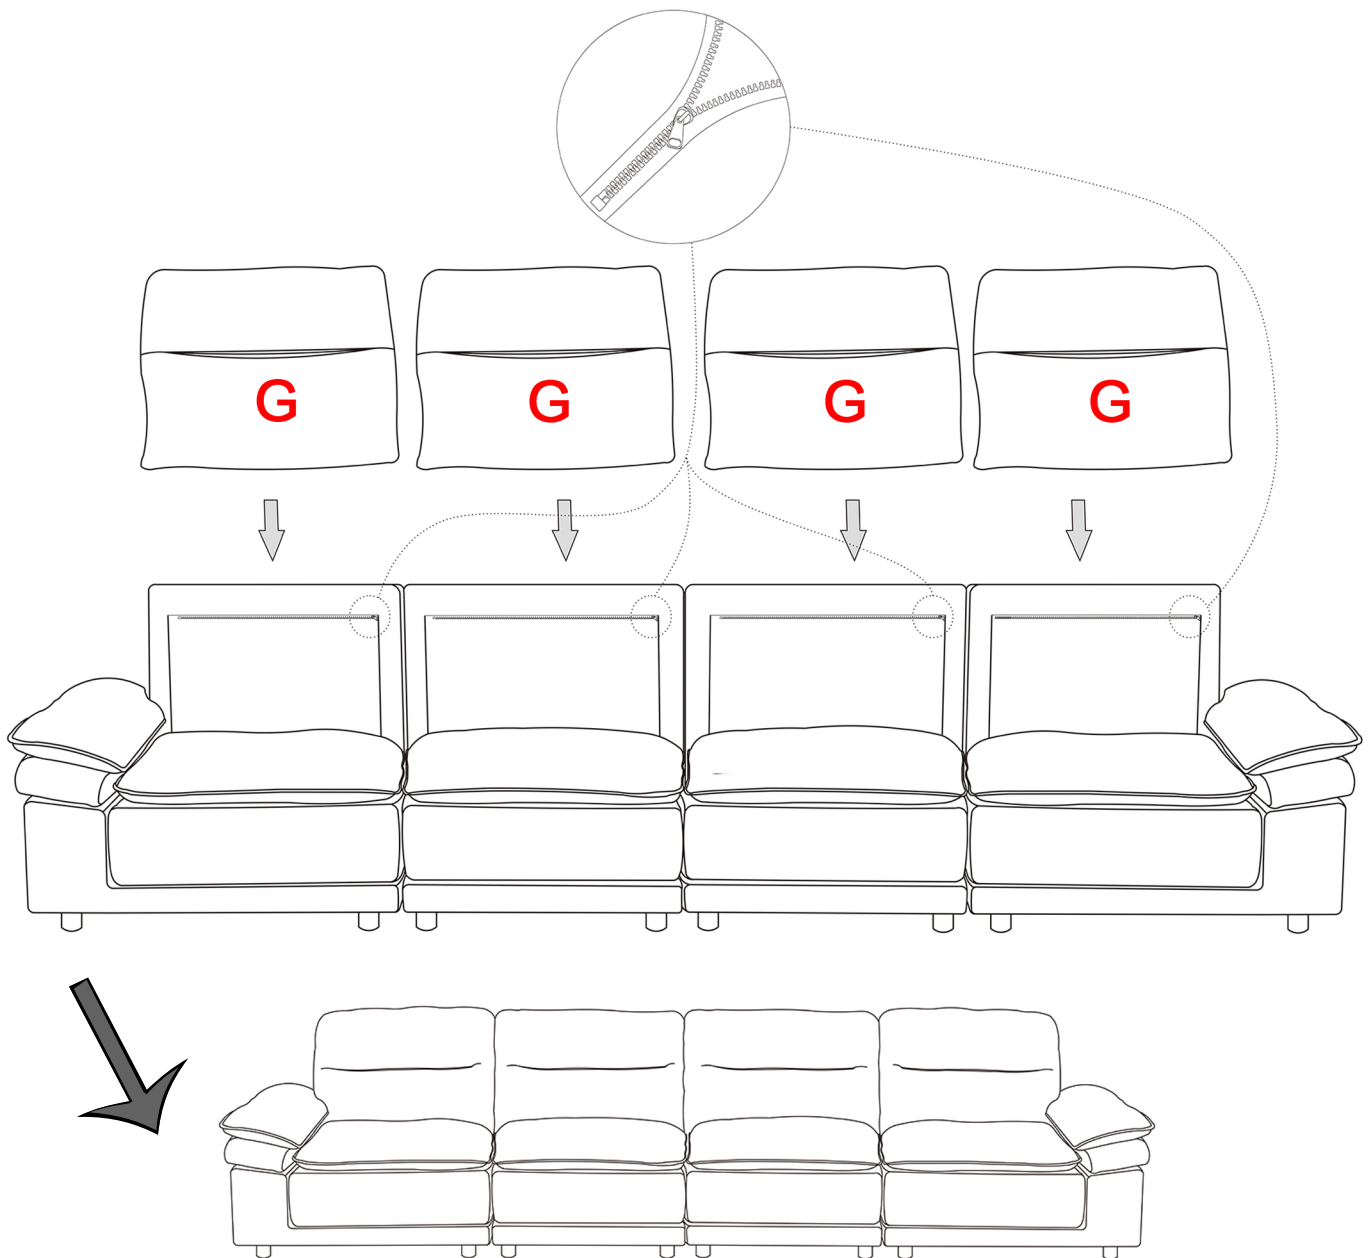

**Step 14. Install the leg(P) to the seat frame(B), then put the seat cushion(A) on top of the seat frame(B).**

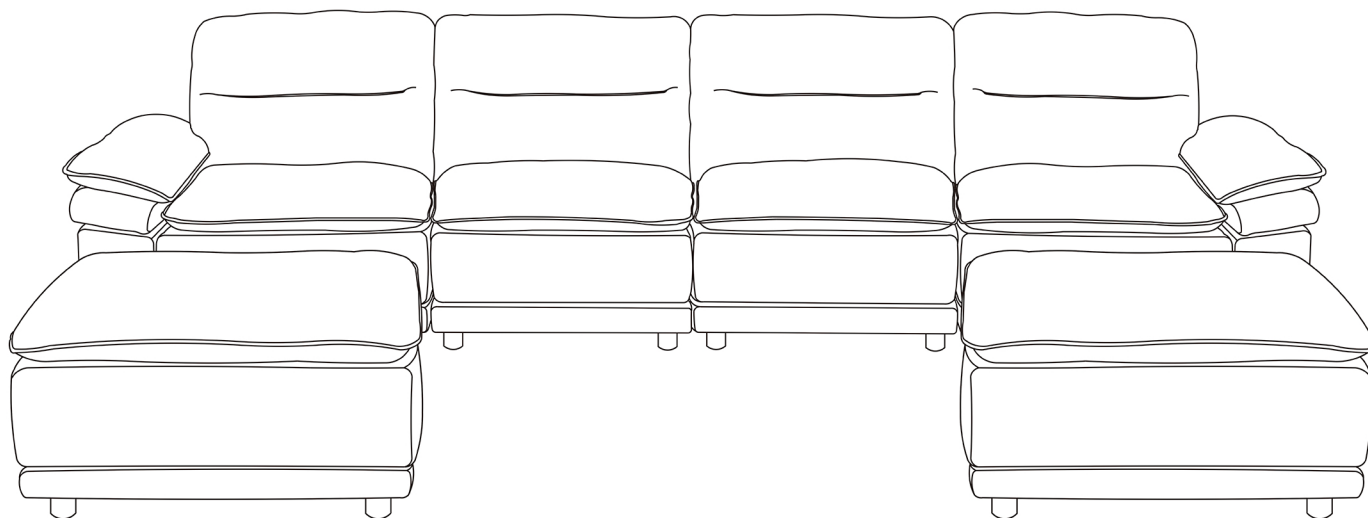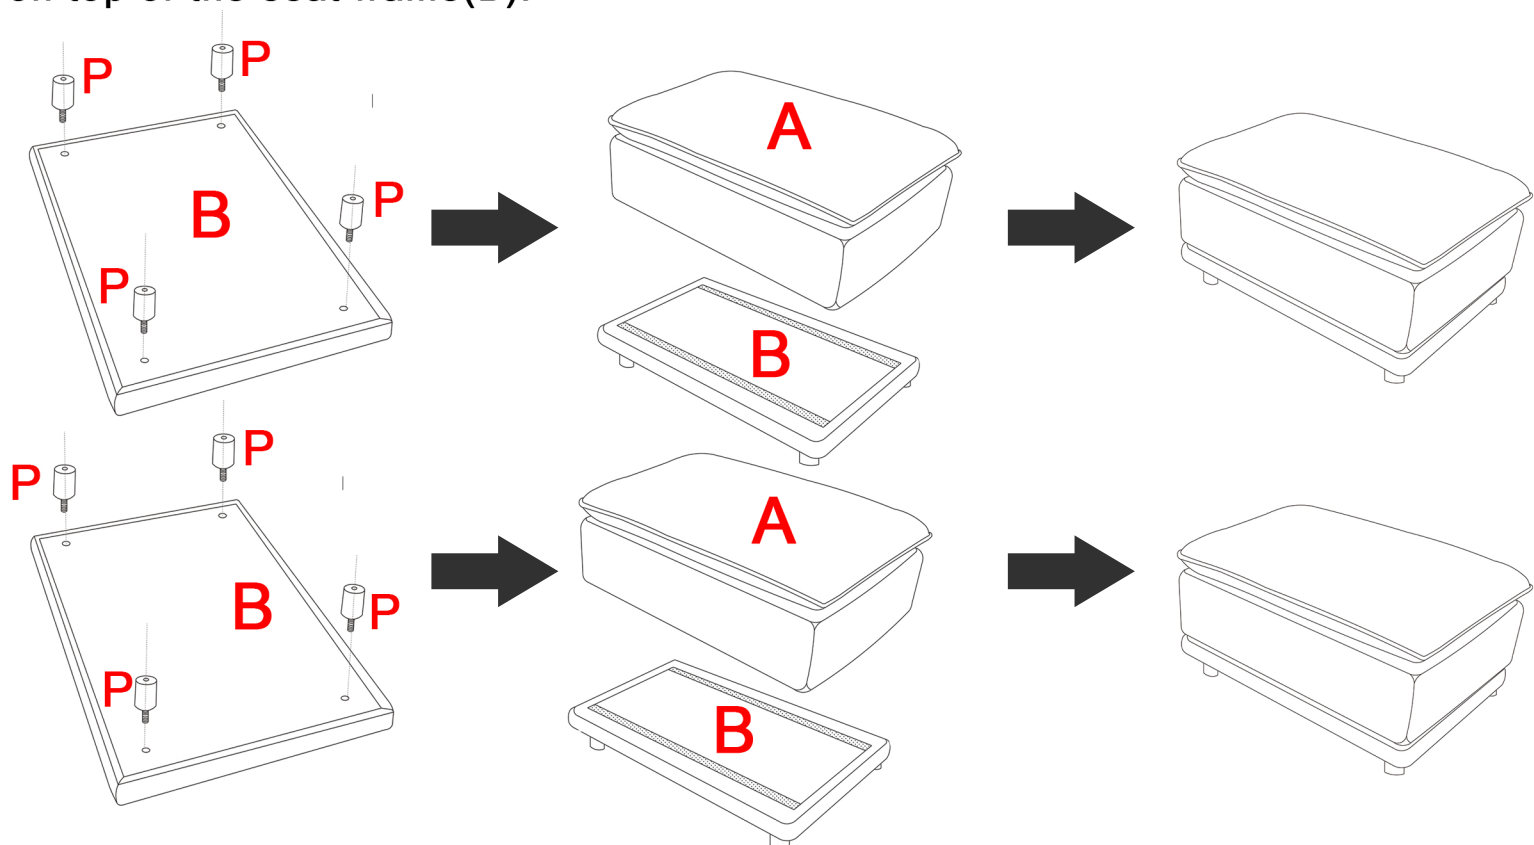

**Open the vacuum packed cushions by carefully cutting the bags with a pair of scissors. Pat the cushion to make it rebound better and fluffy. Please allow the cushions at least 72 hours to be recovered to its original shape and the wrinkles will basically disappear.**