


Installation Manual

LJG-TC-WH/BK-002

Assembly Instructions -Please keep for future reference

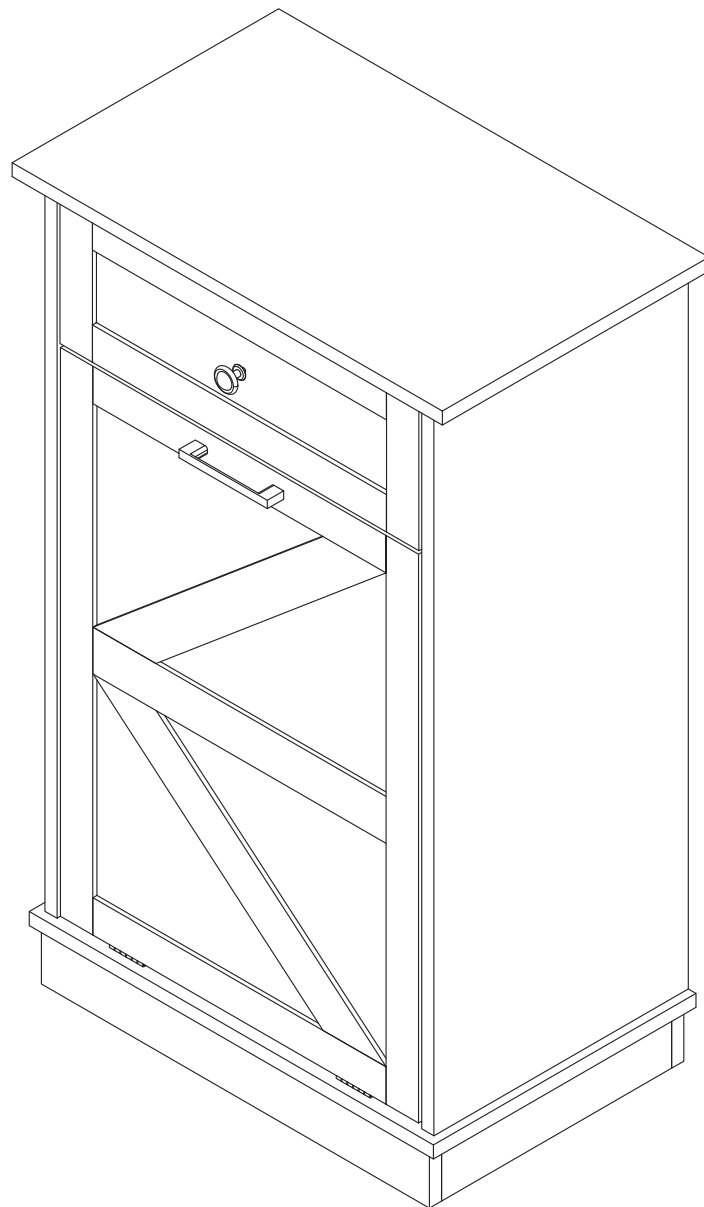

Important-Please read these instructions fully before starting assembly



Safety and Care Advice

Important – Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on the following pages.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.

- During assembly do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



power drill is set on a low torque setting.


- To reduce the likelihood of damaging your product please ensure that your

Care and maintenance



- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.



Do not return



Do not throw



New product



Refund



In-Policy Warranty

Product quality problem: Broken or scratched Pieces/ Missing Pieces/ Unable to assemble

Logistics problem: Delayed delivery/ Wrong address delivery/ Undelivered

Not In Warranty Policy


Don't want/need anymore

The dimensions/description/color are not as expected

Note


In order to enhance product durability, extend its lifespan, improve your user experience, and save time, we provide the following suggestions to assist you with the assembly process:

- 1. Please follow the installation steps to avoid unnecessary effort or assembly failures.
- 2. We suggest checking all screws every six months to ensure they are secure. If any screws are loose or if there are signs of rust, severe deformation, or wear, please tighten or replace the components promptly to maintain product performance and extend its lifespan.



No matter what problem you encounter, it is recommended to try our after-sales service first. Sending your question to the service staff in the form of a picture or video will help the service staff better understand your question so that they can better help you. Returning a product is a very difficult thing to do, before you decide to return it, please contact the service staff, a refund and a brand new product will be better options.

Person Recommended




Using Camlocks

Step 1

Connect the male camlock as directed in the assembly instructions using a screwdriver.

1


DO NOT OVER TIGHTEN.
NE PAS SERRER EXCESSIVEMENT.



Step 2

Push the male camlock into the entry hole.

2

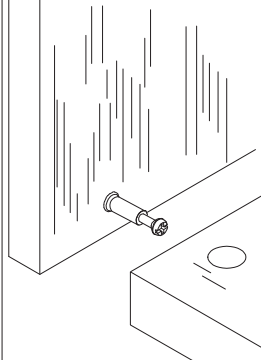


Step 3

Insert the female camlock as shown in the instruction.

Note: ensure that the arrow on the top of the camlock points towards the entry hole for the male camlock.

3

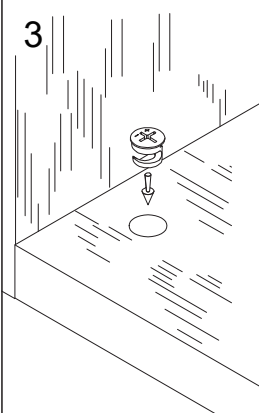



Step 4

Turn the female camlock clockwise with a screwdriver.

You should feel a click when the camlock is locked in place.










The joint is now secure.

4

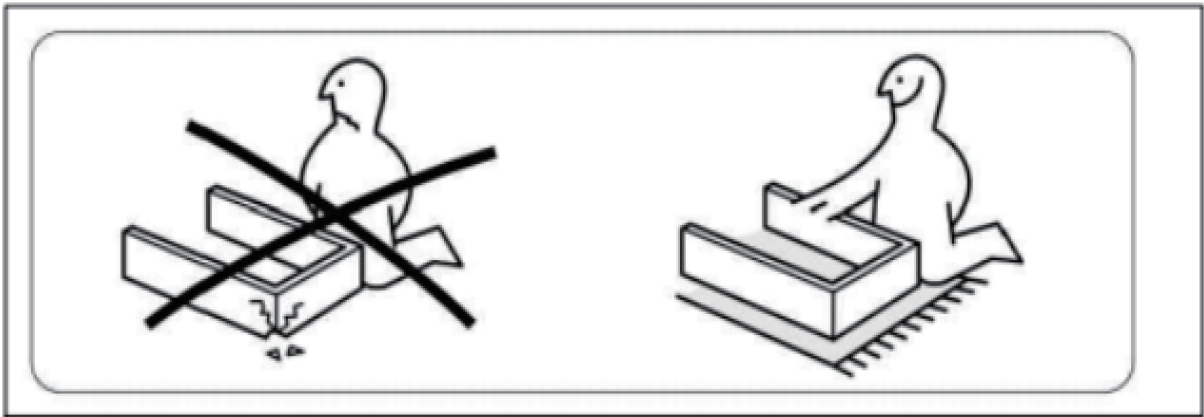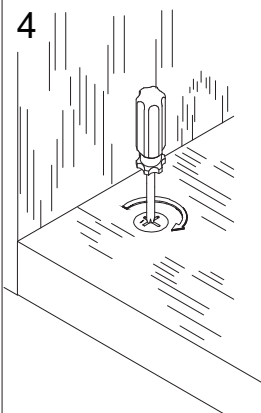


Make sure to put one carpet or some thicker film under the cabinet body during the installation in order to avoid scratch or damage to the parts.

Way of using Cam Lock Nuts and Cam Screws

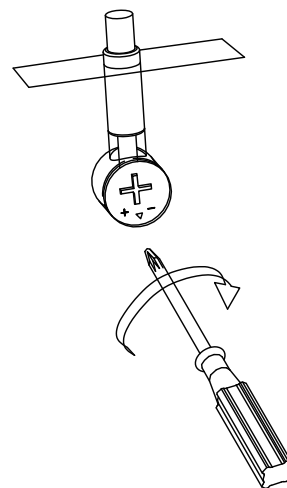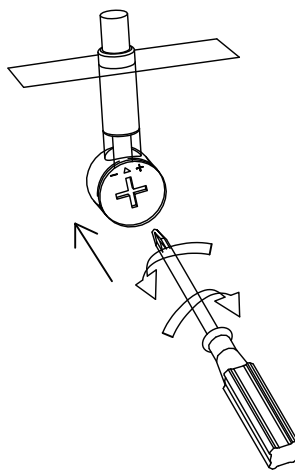

Way of installing slide rail

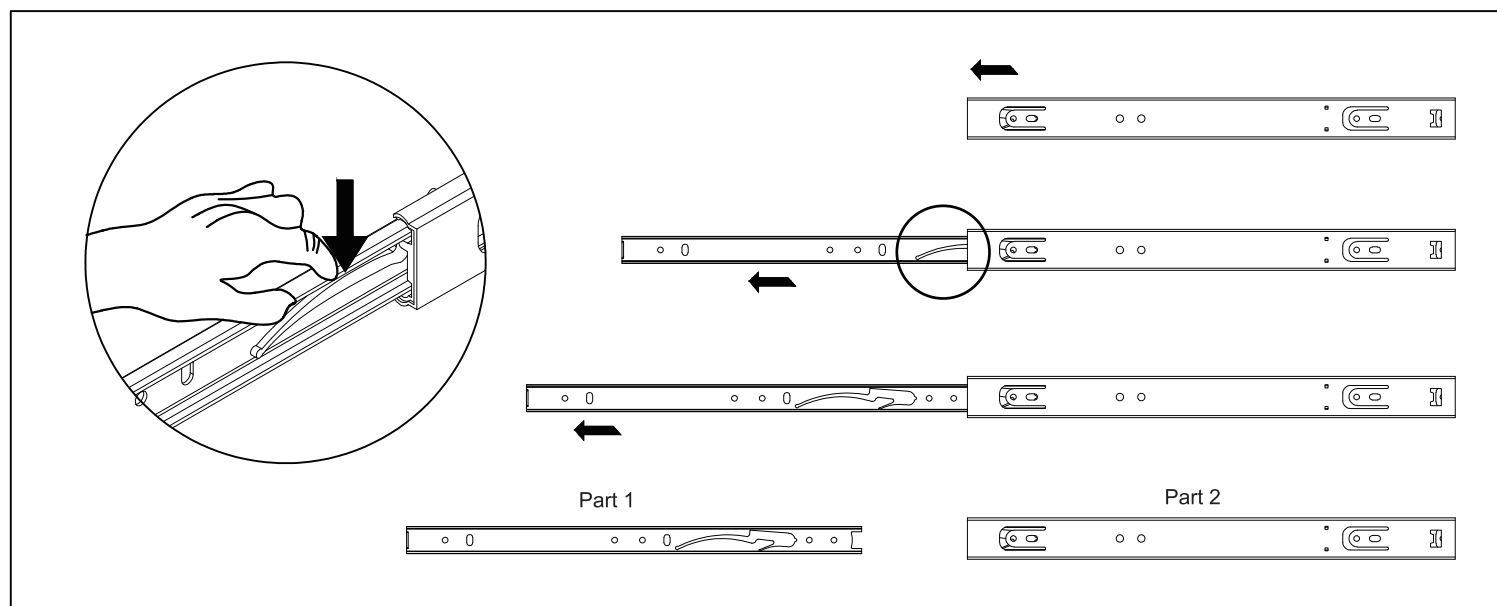

Step 1

Pull out internal rail

Step 2

Press the plastic clasp according to the diagram and keep pressing


Step 3

Keep pressing plastic clasp and slowly pull out


Step 4

Until the inner slide is fully pulled out


Way of using hinges

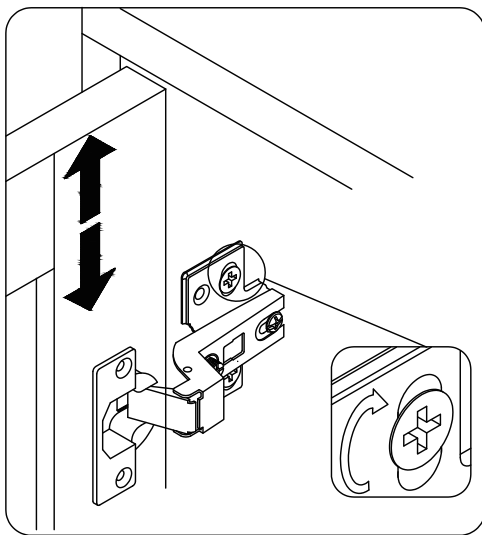



Before assembly
determine the position of the door
the oval hole on the hinge could
adjust door UP & DOWN

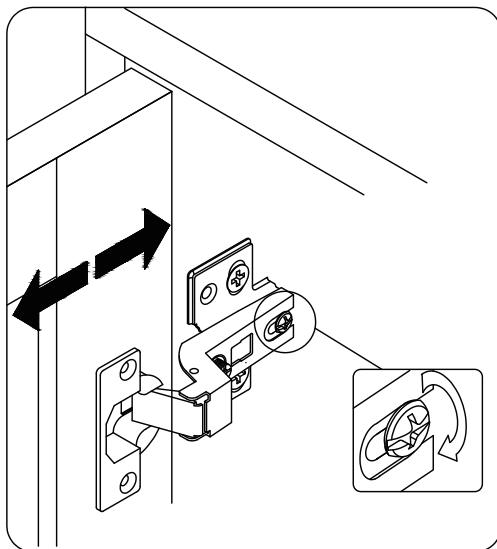


Turn the screw
at the end of the hinge
adjust door FRONT & BACK






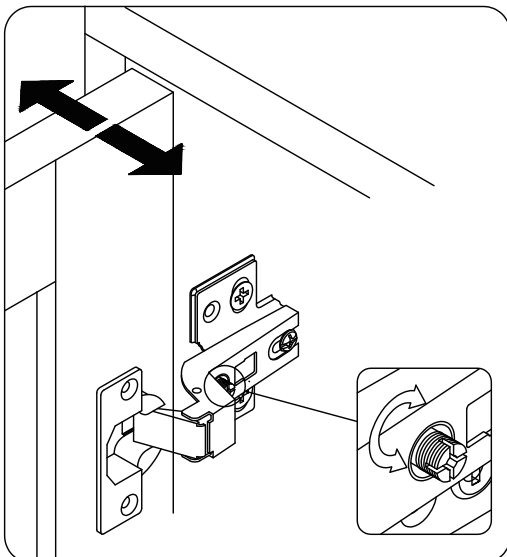



Turn the screw
at the middle of the hinge
adjust door LEFT & RIGHT



PARTSLIST

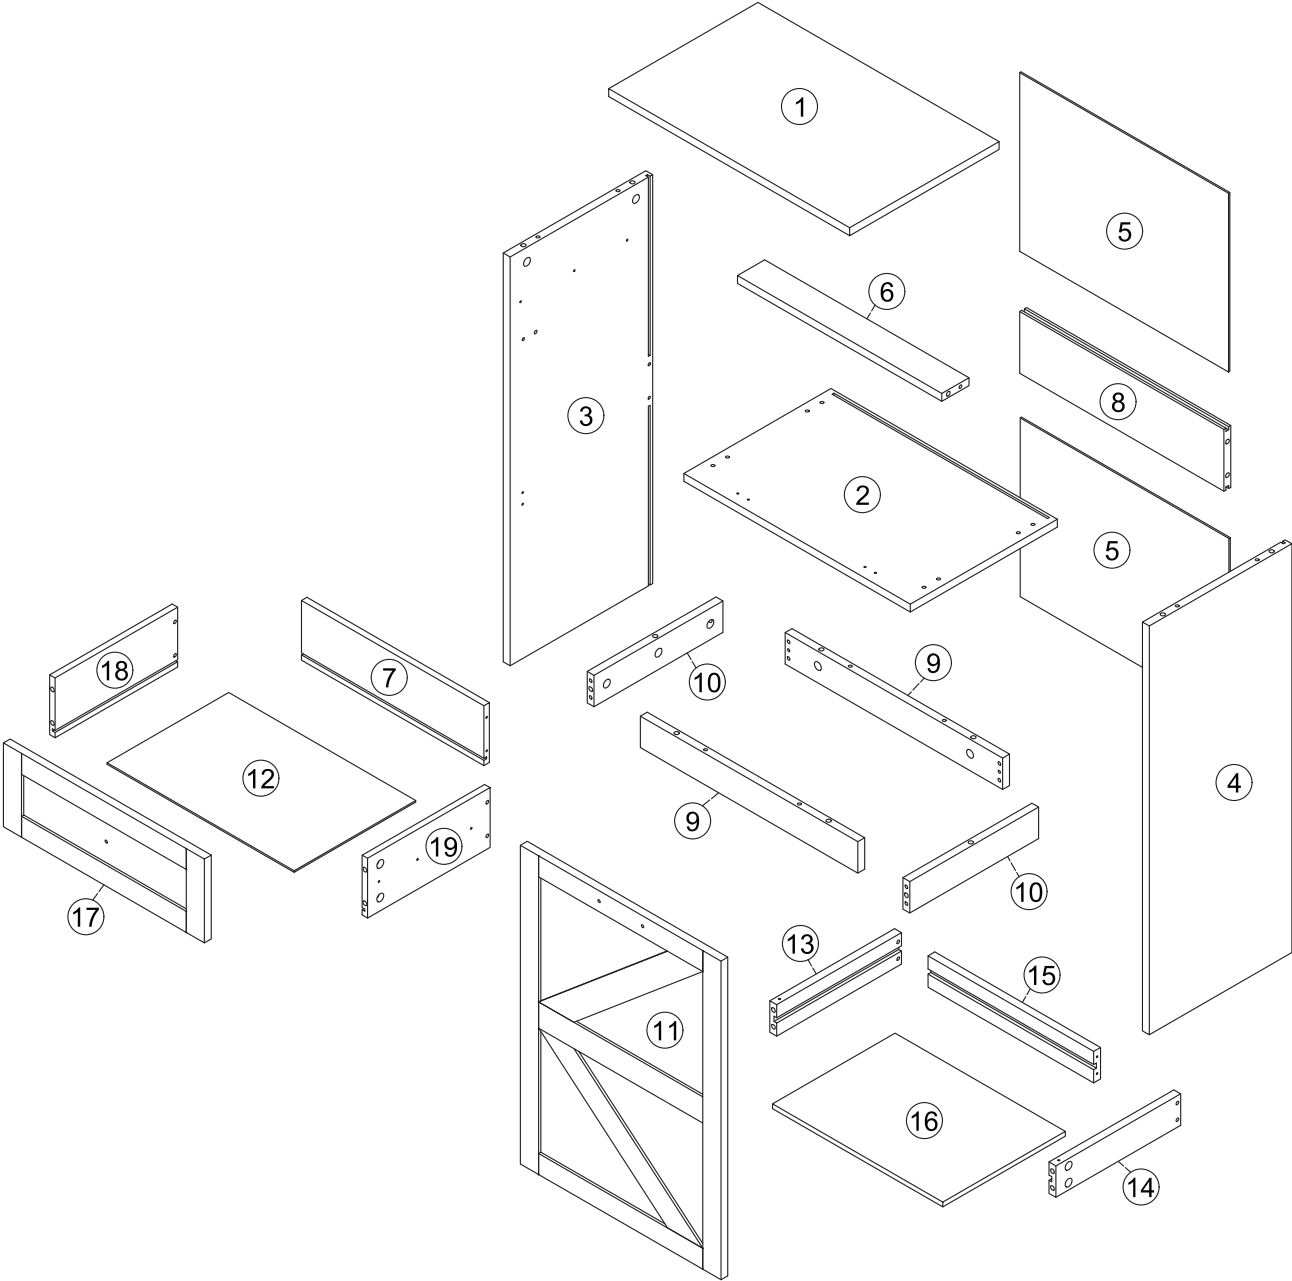

A  28pcs	B  24pcs	C  M4×40mm 4pcs	D  D1 D2 1set		E  M3×12mm 30pcs
F  M4×30mm 8pcs	G  2pcs	H  M6×30mm 22pcs	I  M3×16mm 8pcs	J  2pcs	K  1pc
L  1pc	M  M4×8mm 1pc	N  1pc	O  M4×16mm 2pcs	P  1pc	Q  Φ 12 4pcs
R  2pcs					


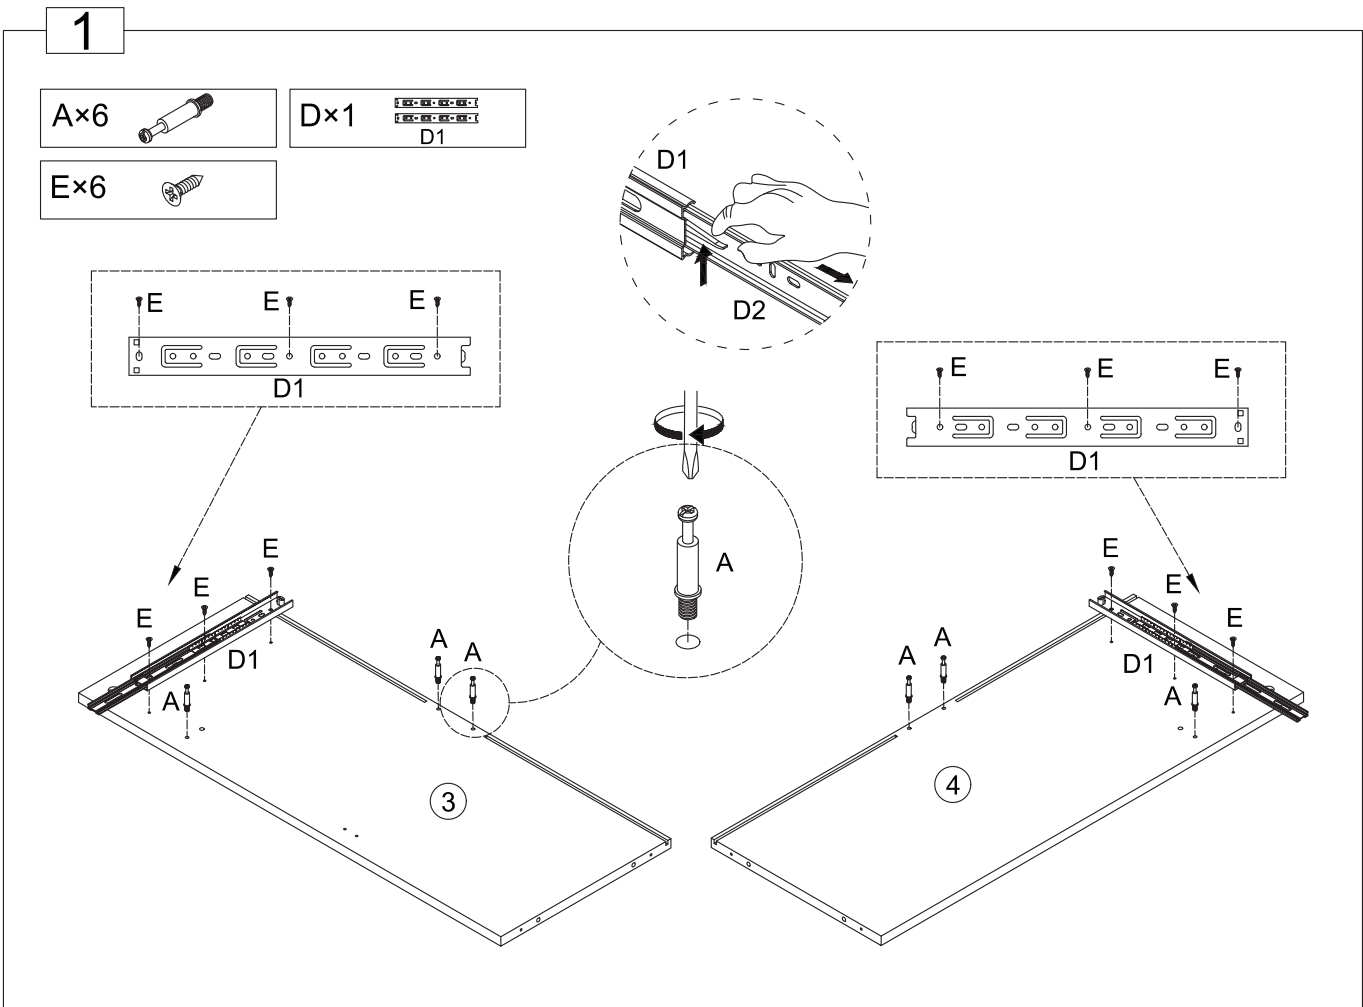


2

B×3



H×1


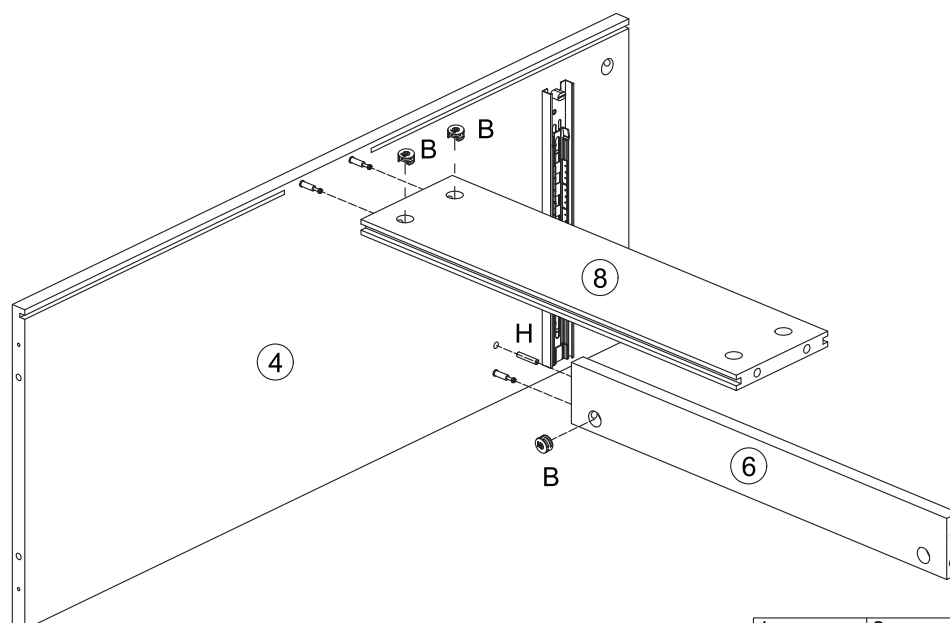


3


B×3



H×1

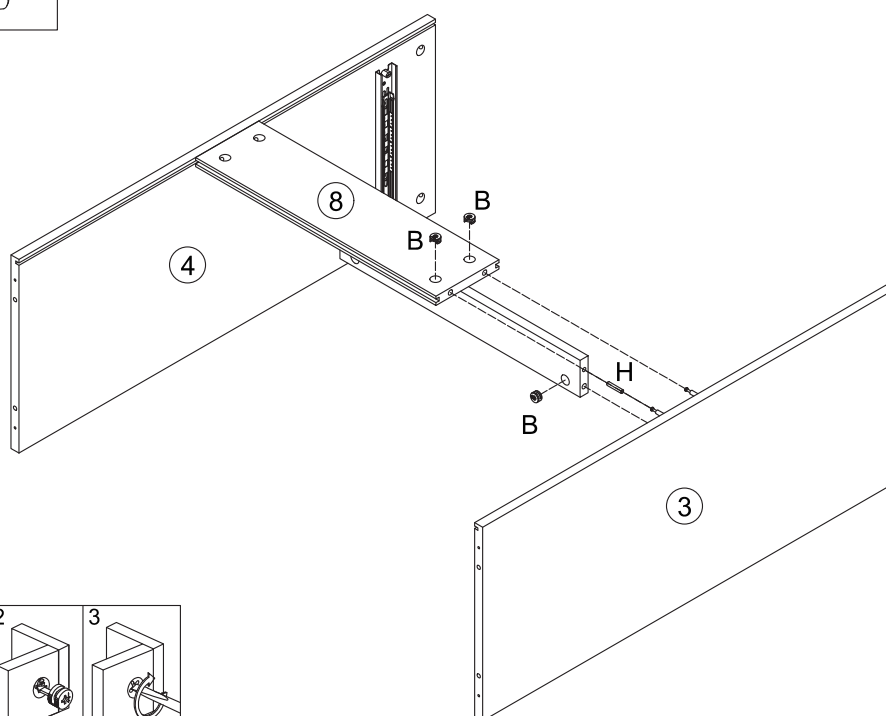


4

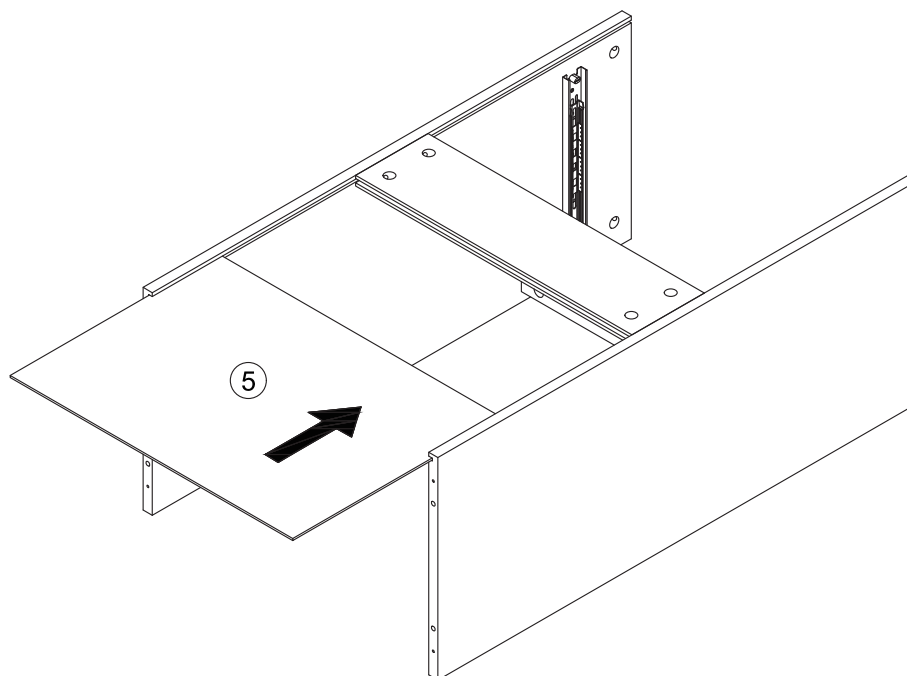

5


C×4 

H×4 

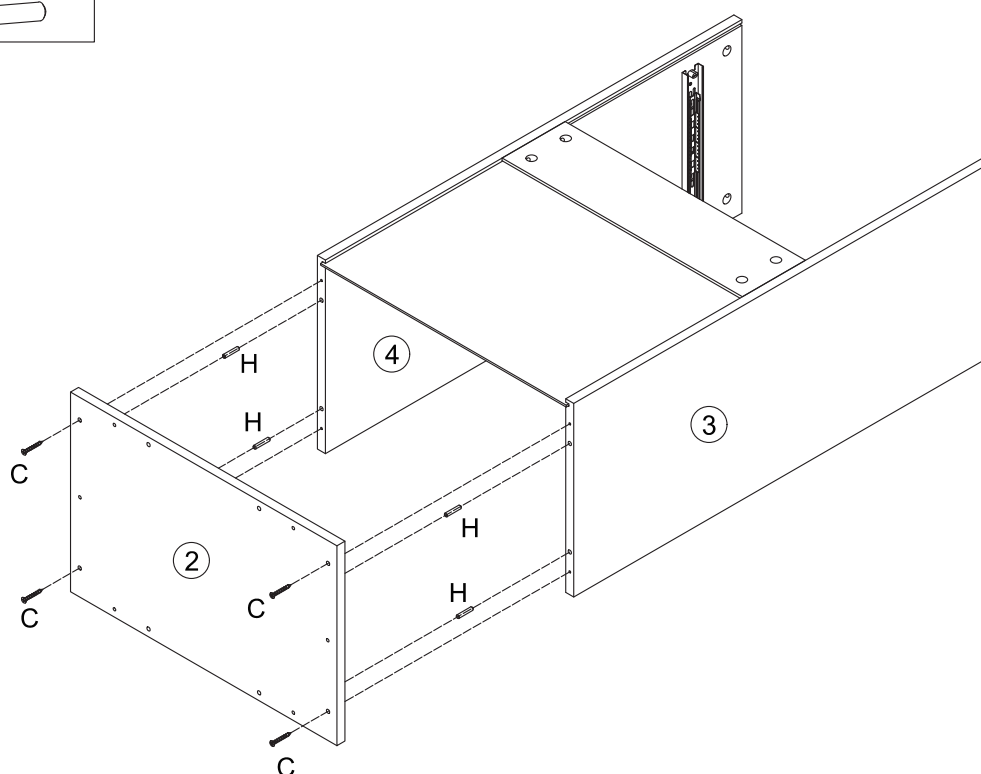


6

A×6

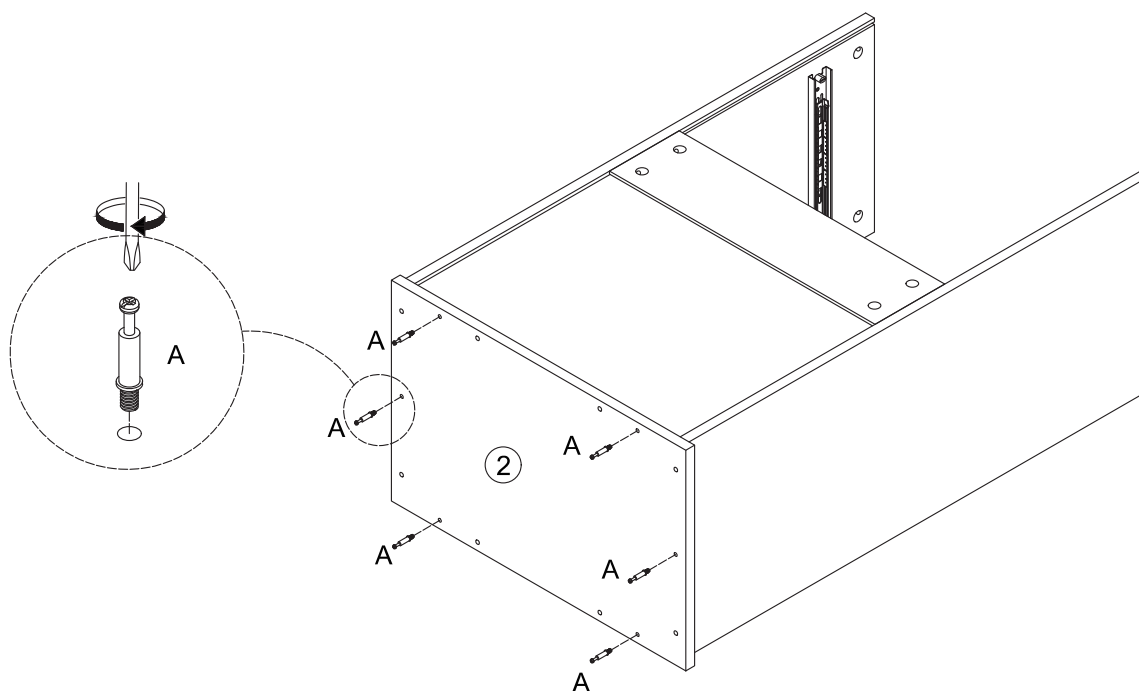

7

A×4


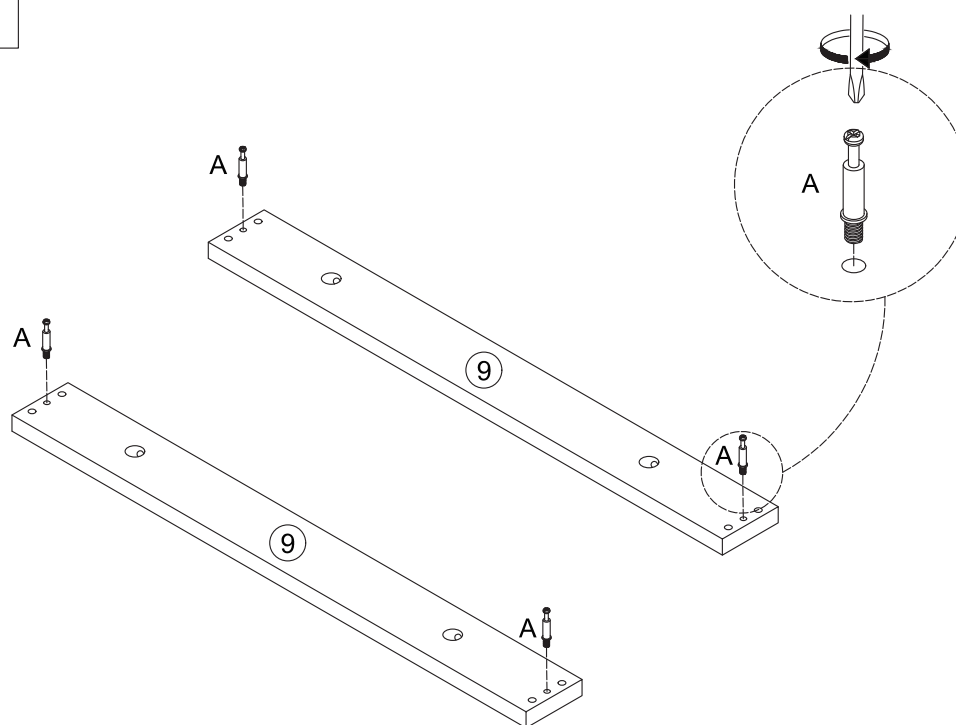


8

B×4



H×8


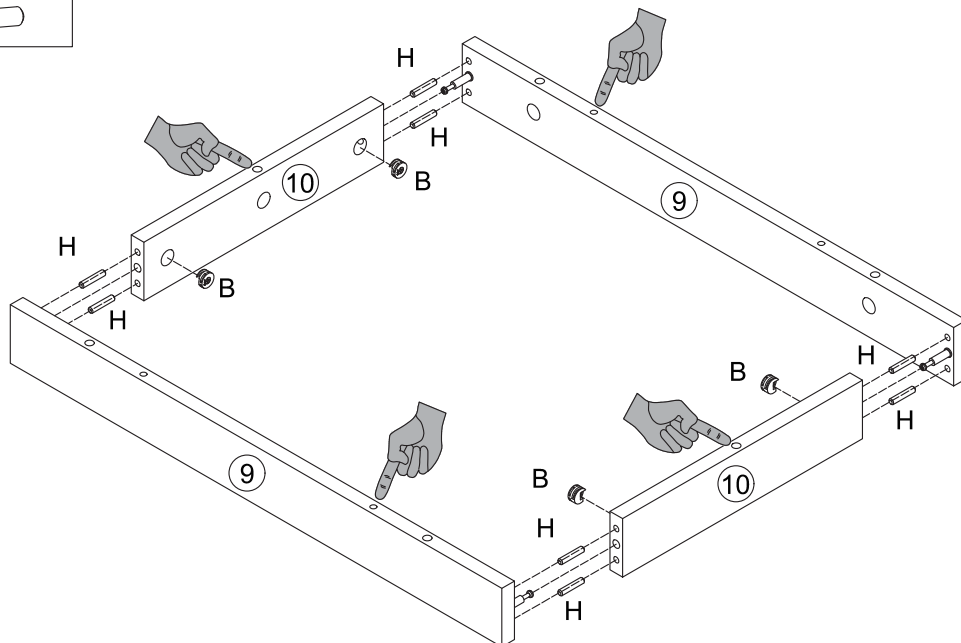


9


B×6



H×4

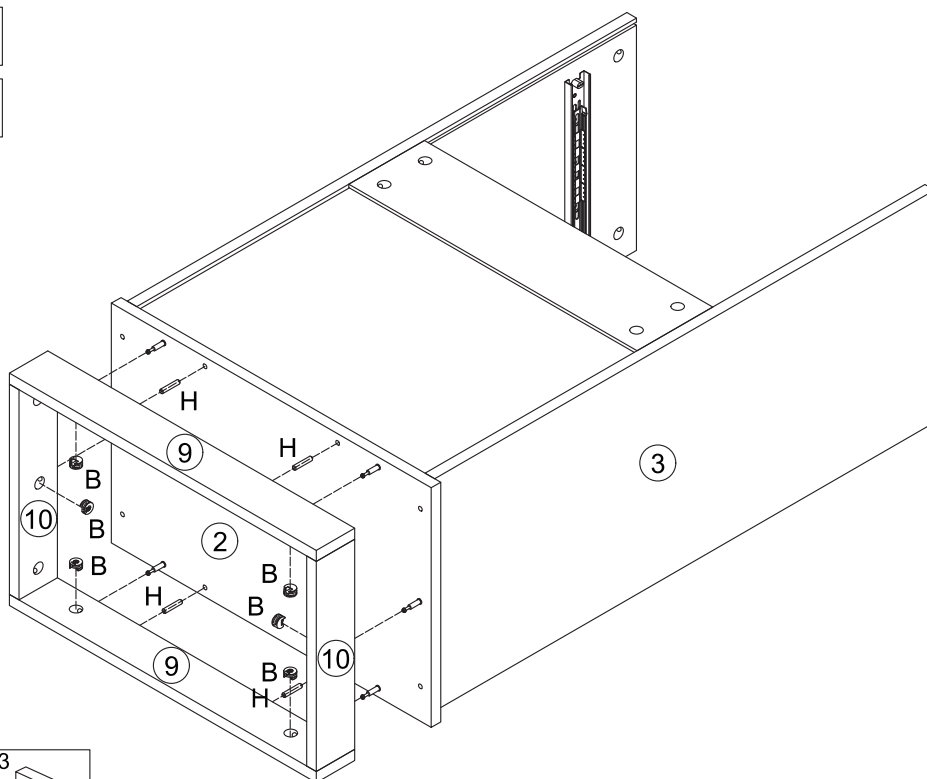


10

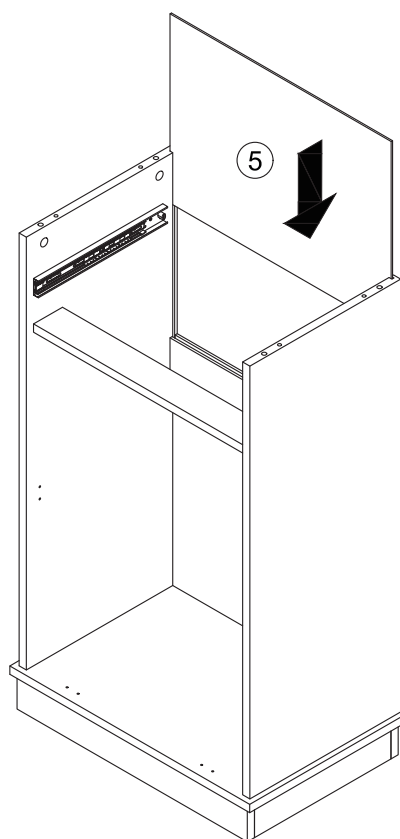

11



A×4

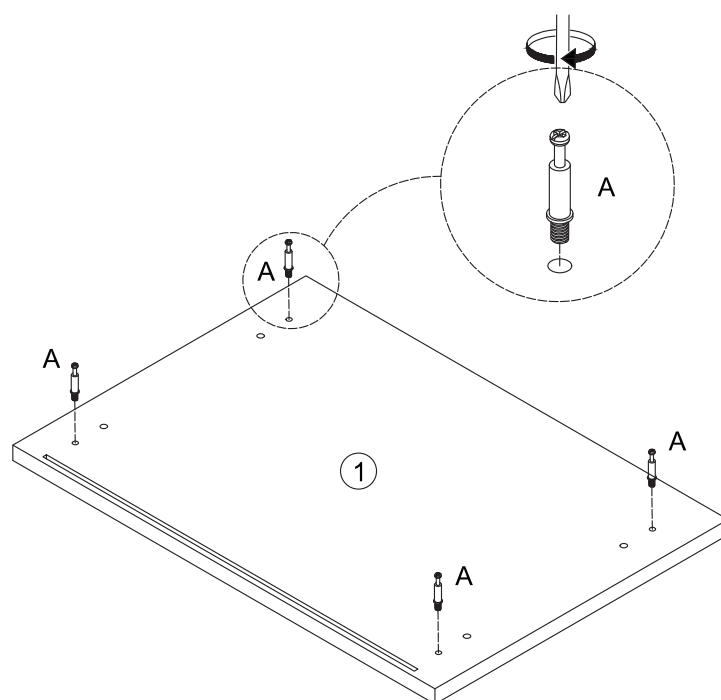

12


B×4 

H×4 

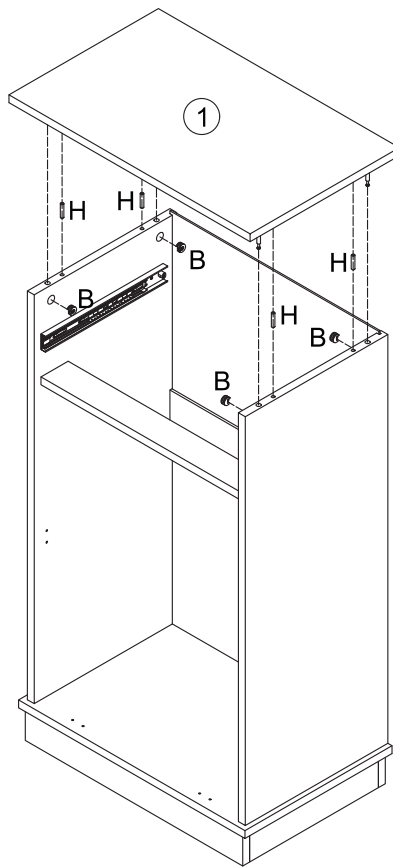



13

A×4 

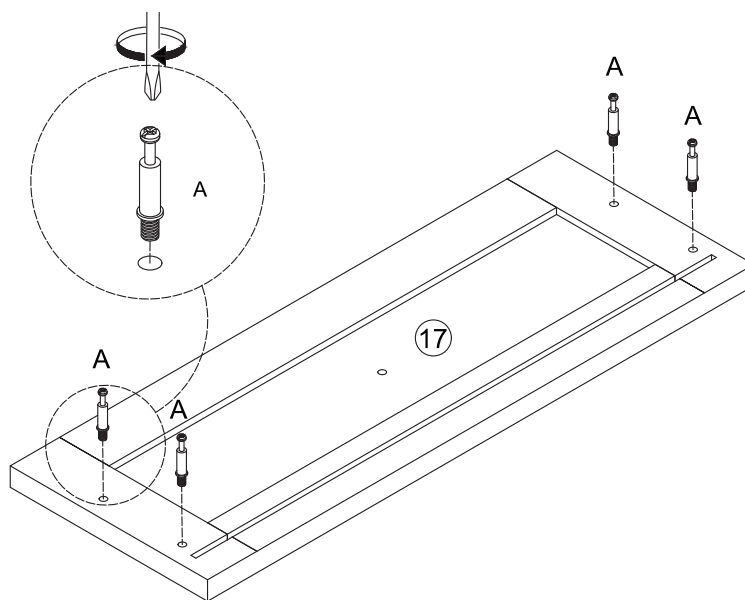


14

B×4

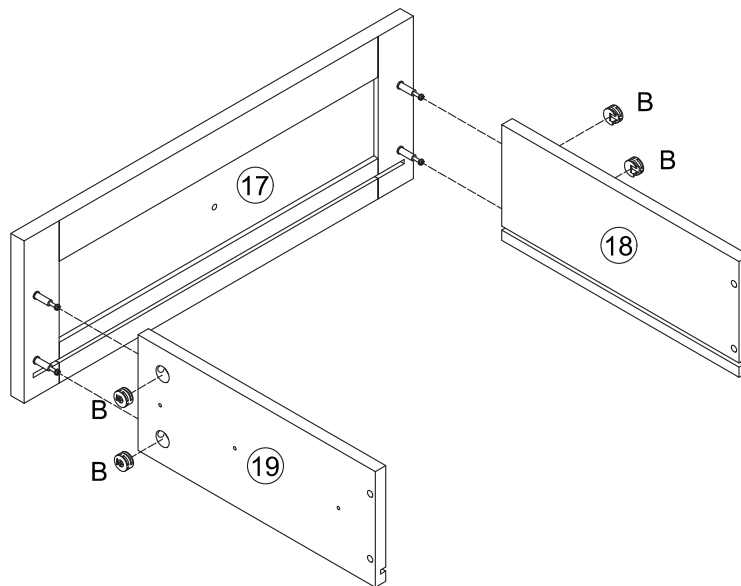

15

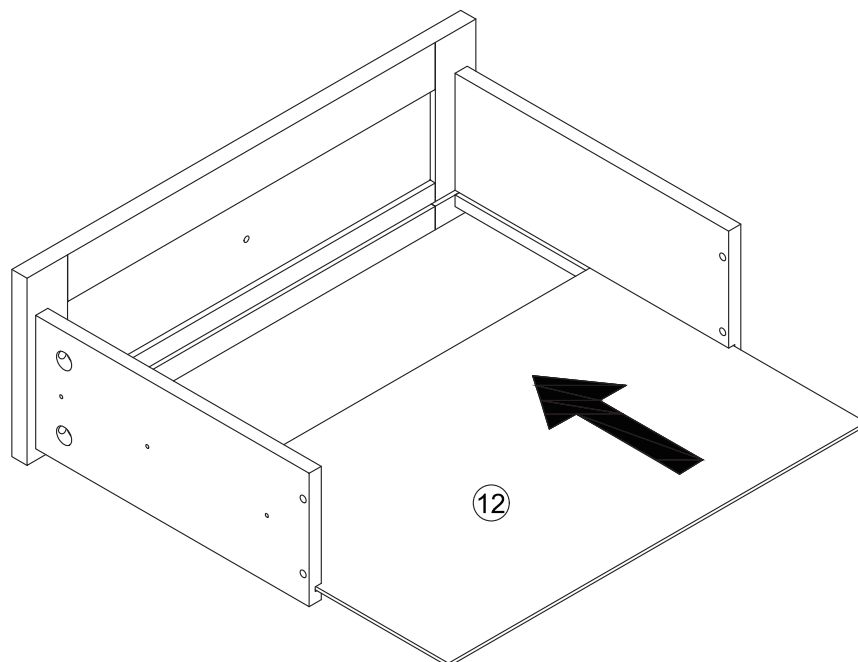


16


F×4 

L×1 


M×1 

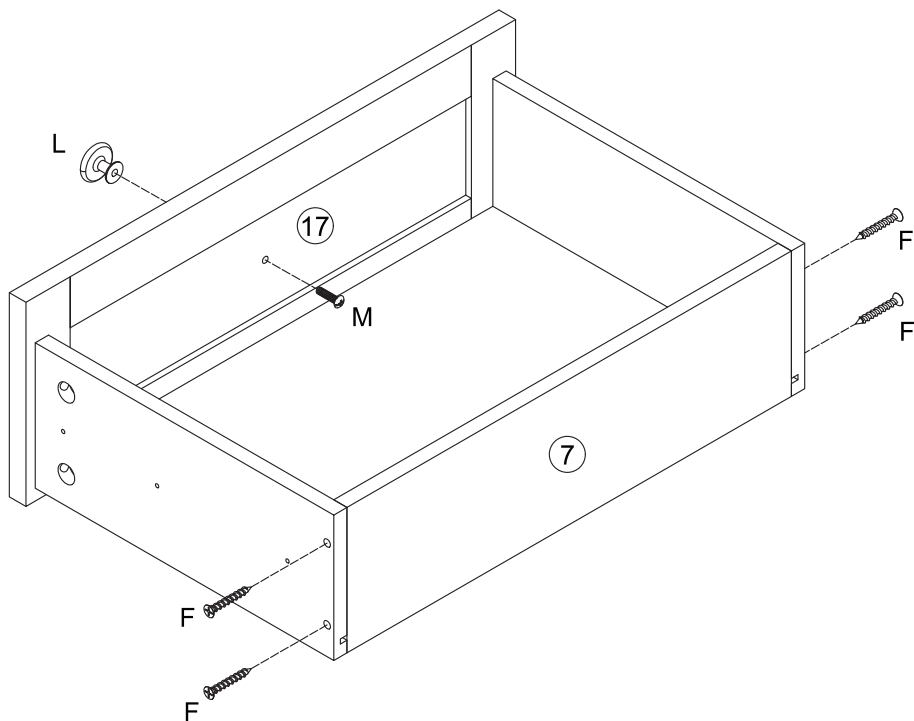


17

D×1 
D2

E×6 

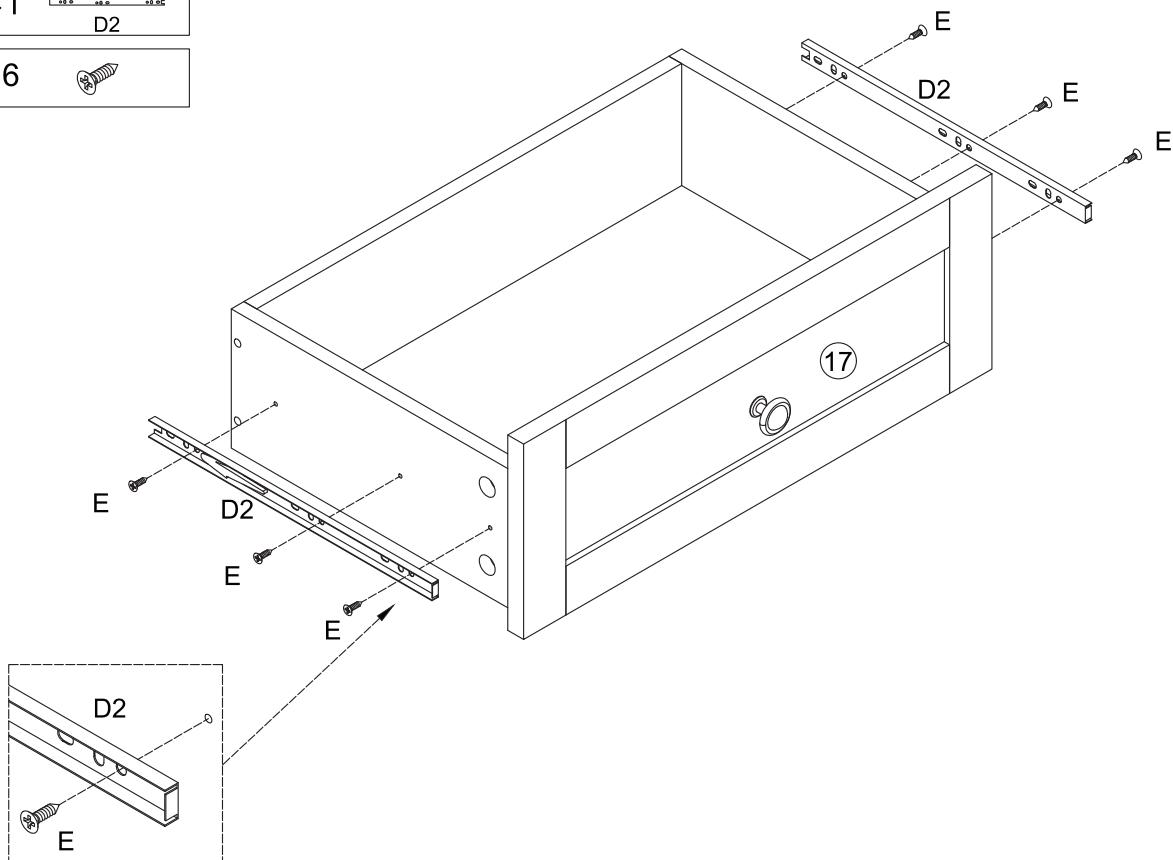


18

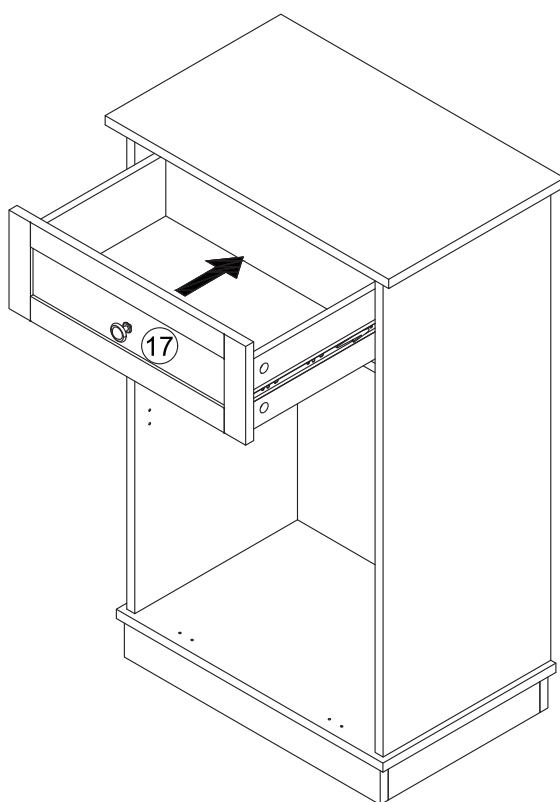



19

- A×4
- E×4
- G×2

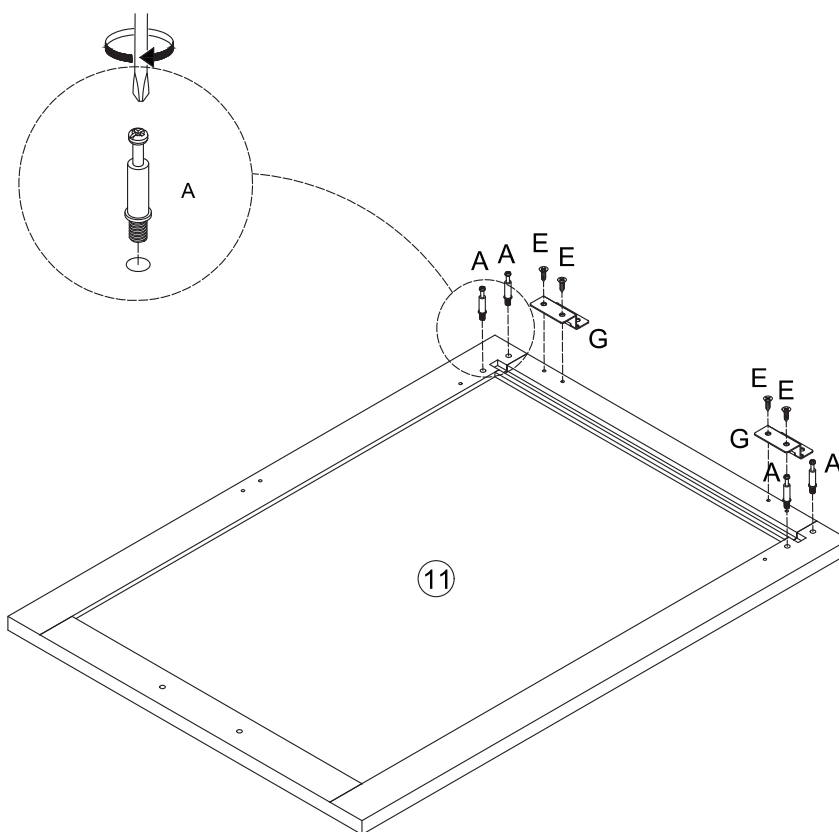


20

Q×4

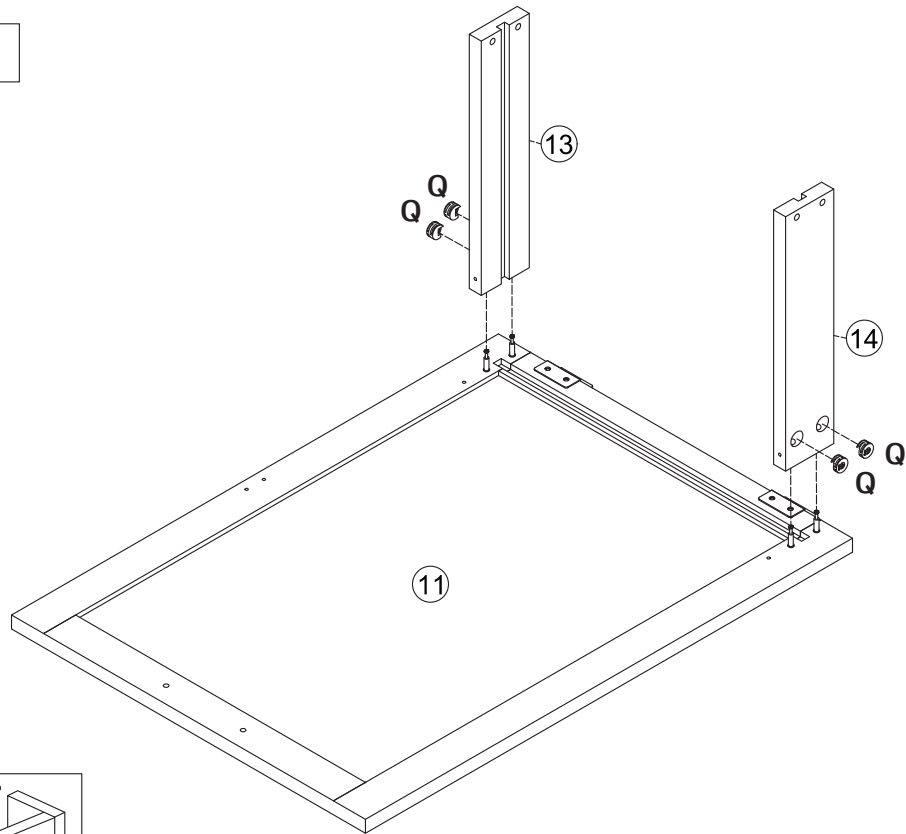


21

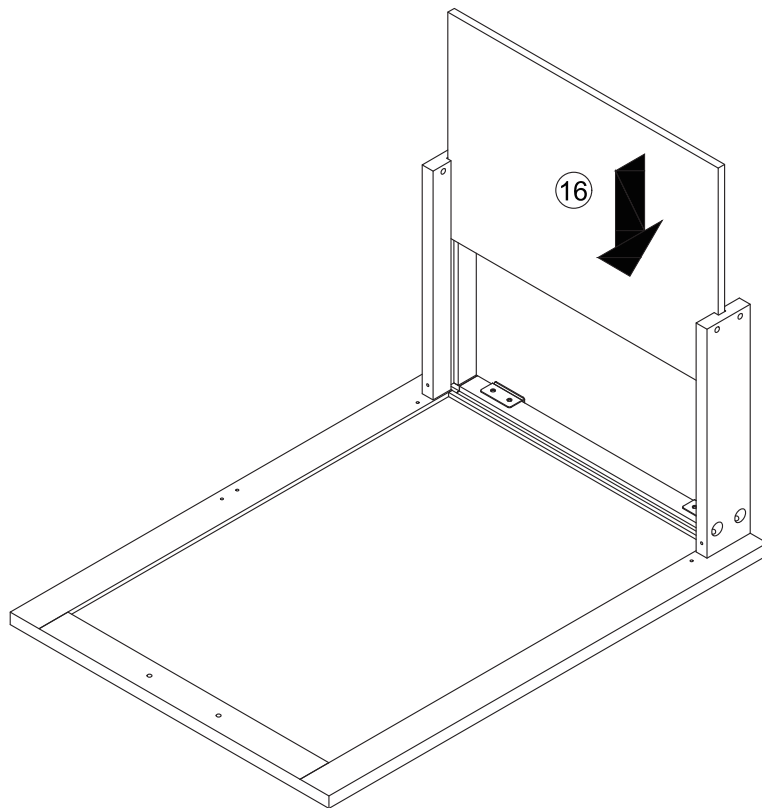

22

F×4 

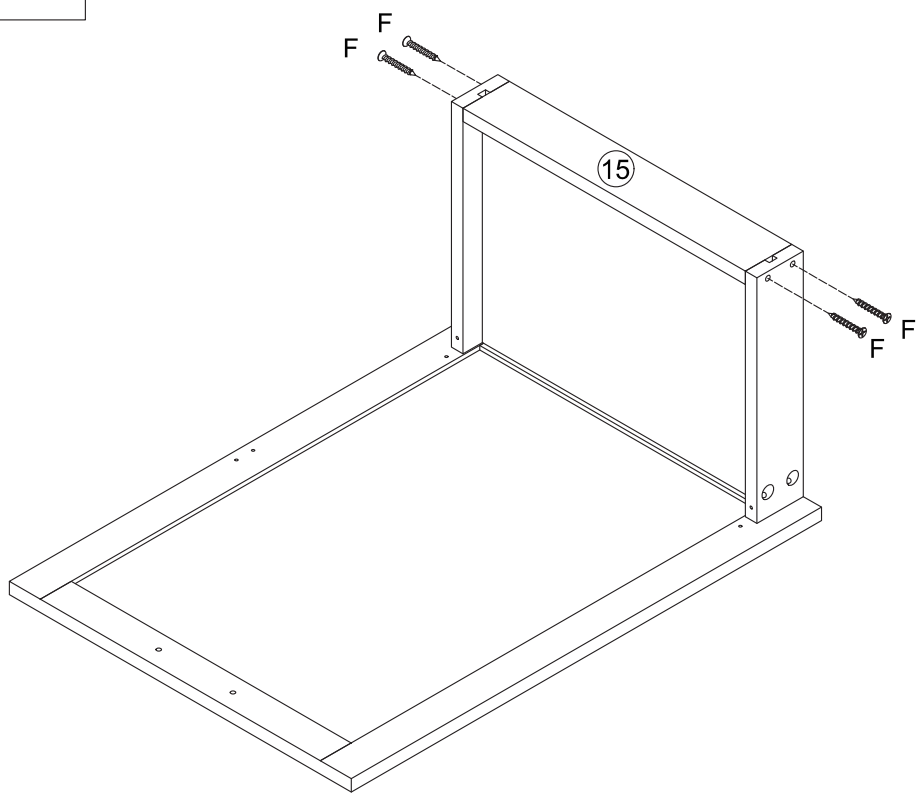


23

E×6 

J×2 


K×1 

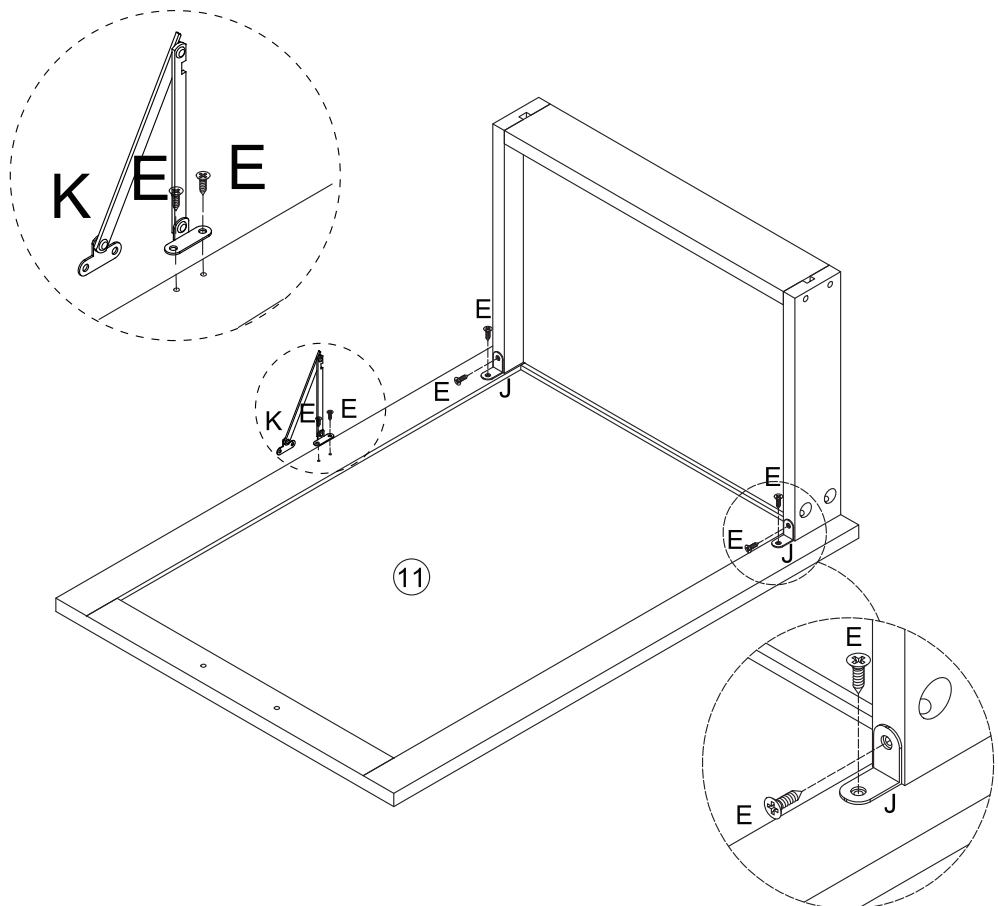

24


N×1 

O×2 

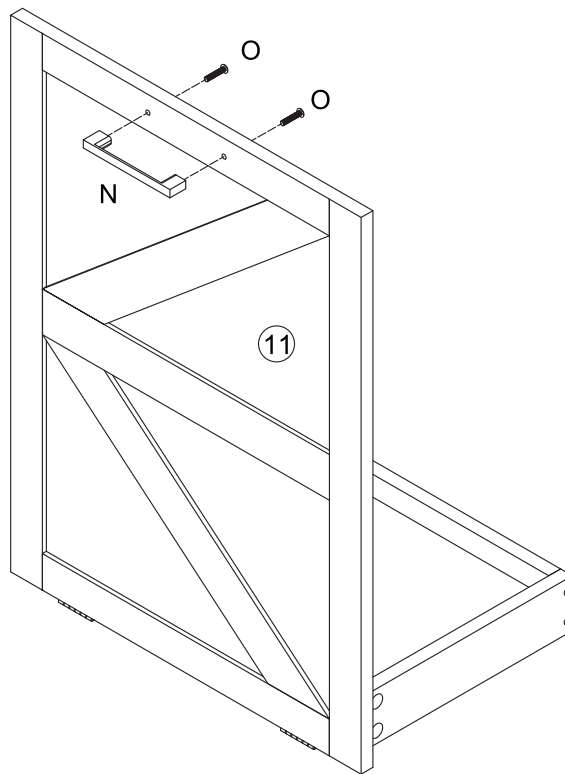


25

E×4 

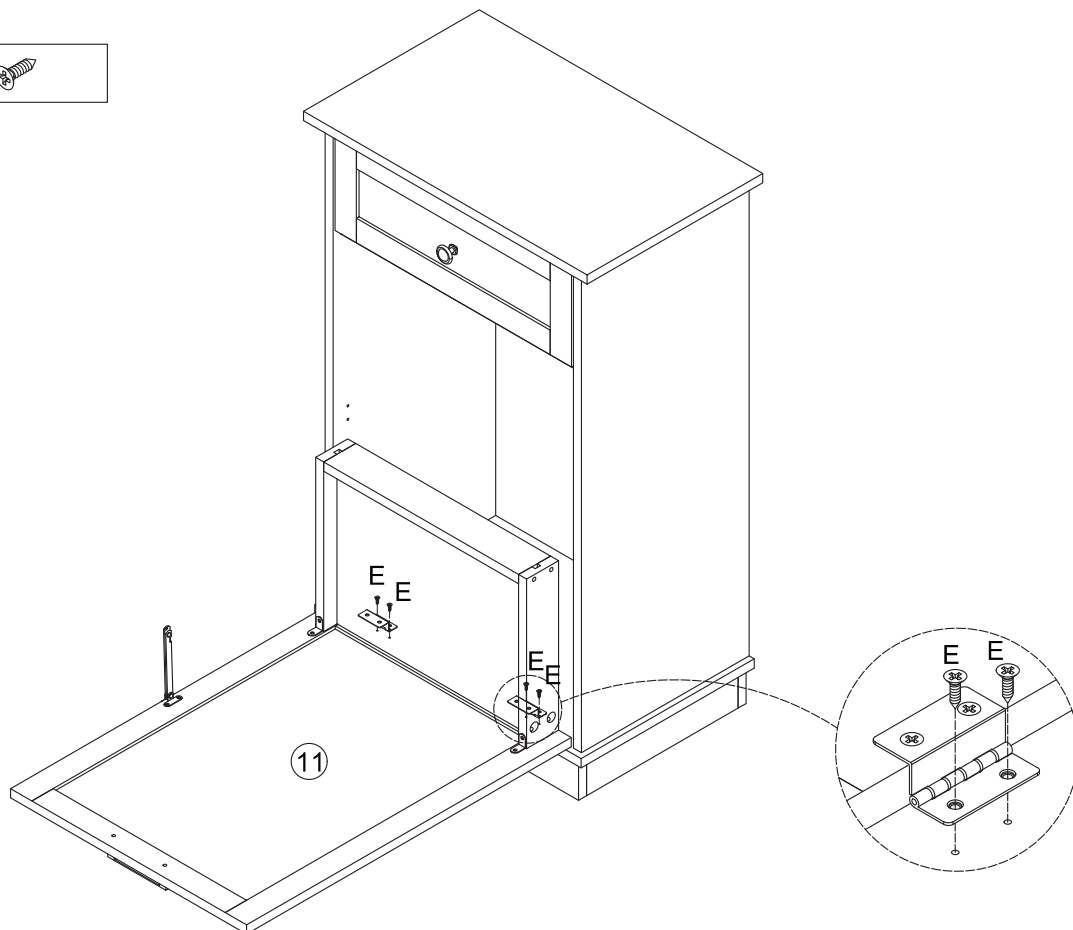


26


E×2

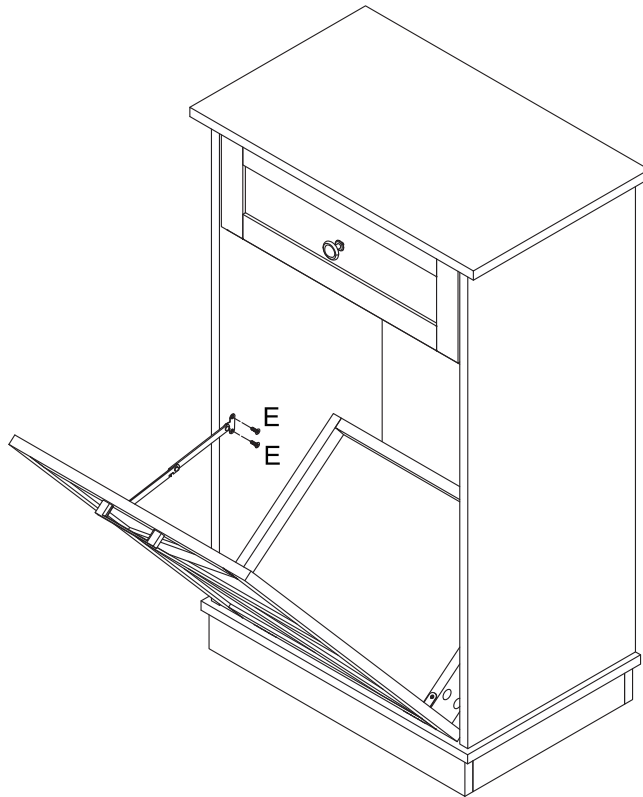

27

I×8

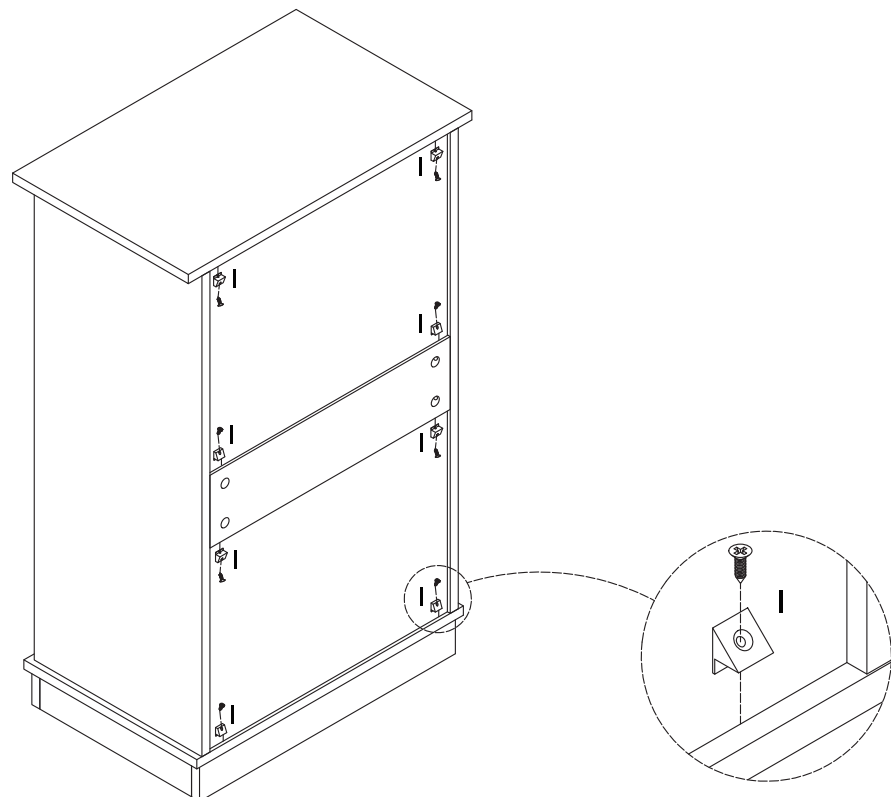

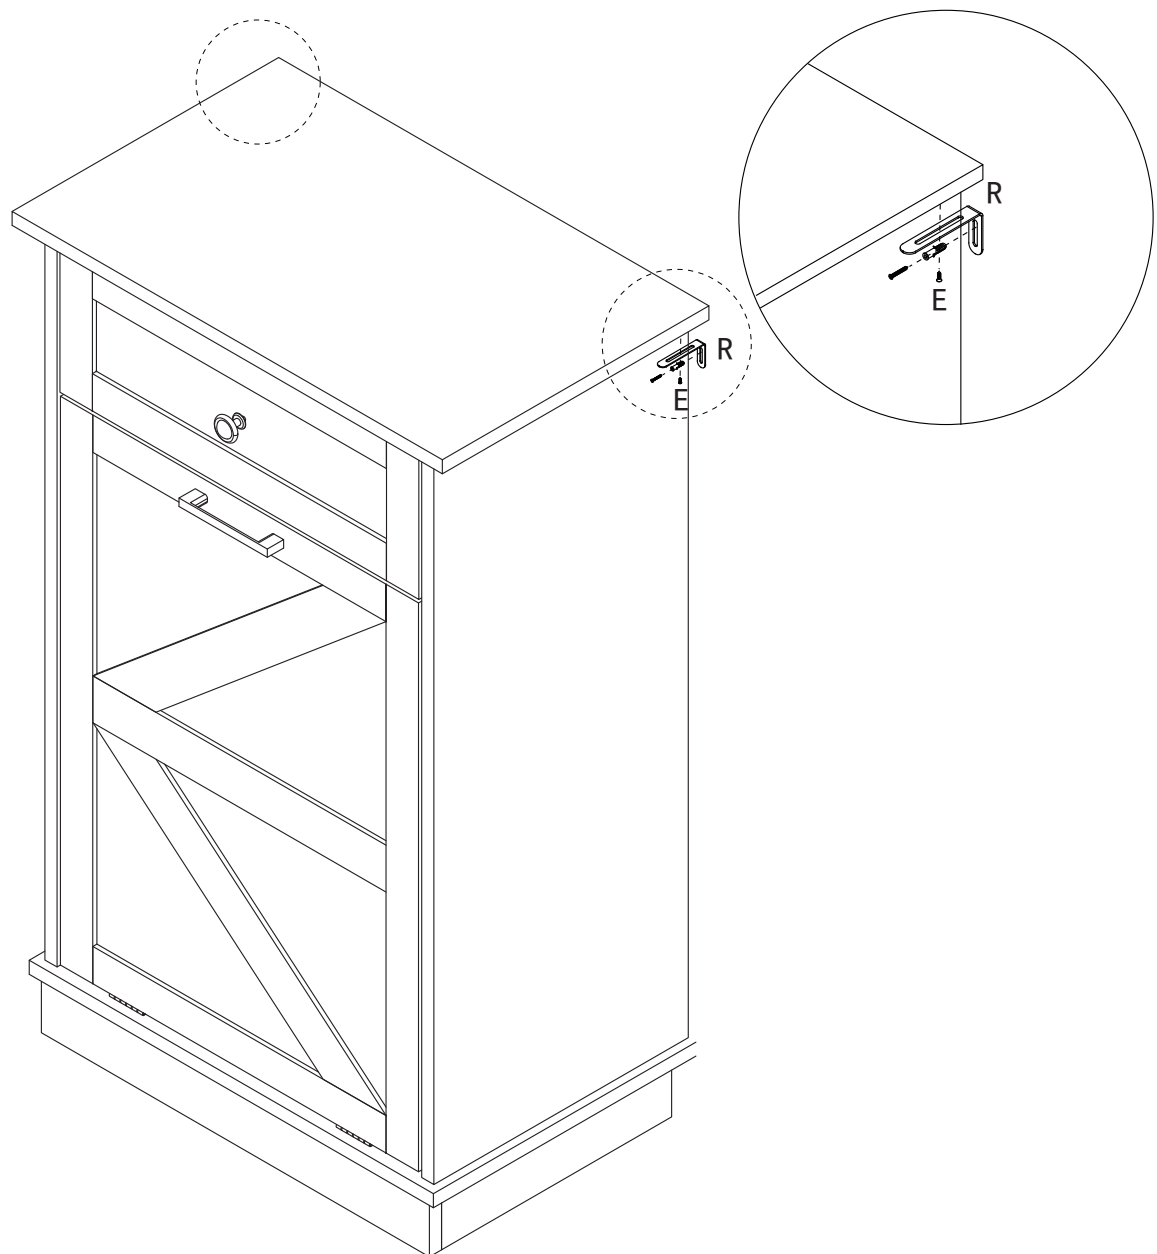

- | | | |
|-----|---|---|
| Rx2 |  |  |
| Ex2 |  | |