

artos[®]

F907-32

INSTALLATION GUIDE

8" shower rainhead, wall
mount arm r+s

BRUSHED NICKEL(BN)



CHROME(CH)



BLACK (BK)



artos[®]

F907-32

OPERATING SPECIFICATIONS

8" shower rainhead, wall
mount arm r+s



FEATURES

Solid Brass

OPERATING PRESSURE

Minimum: 15 psi

Maximum: 75 psi

Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE

Maximum: 176°

FLOW RATE

1.8 USGPM

APPROVALS




artos[®]

F907-32

PRODUCT DIMENSIONS

8" shower rainhead, wall
mount arm r+s

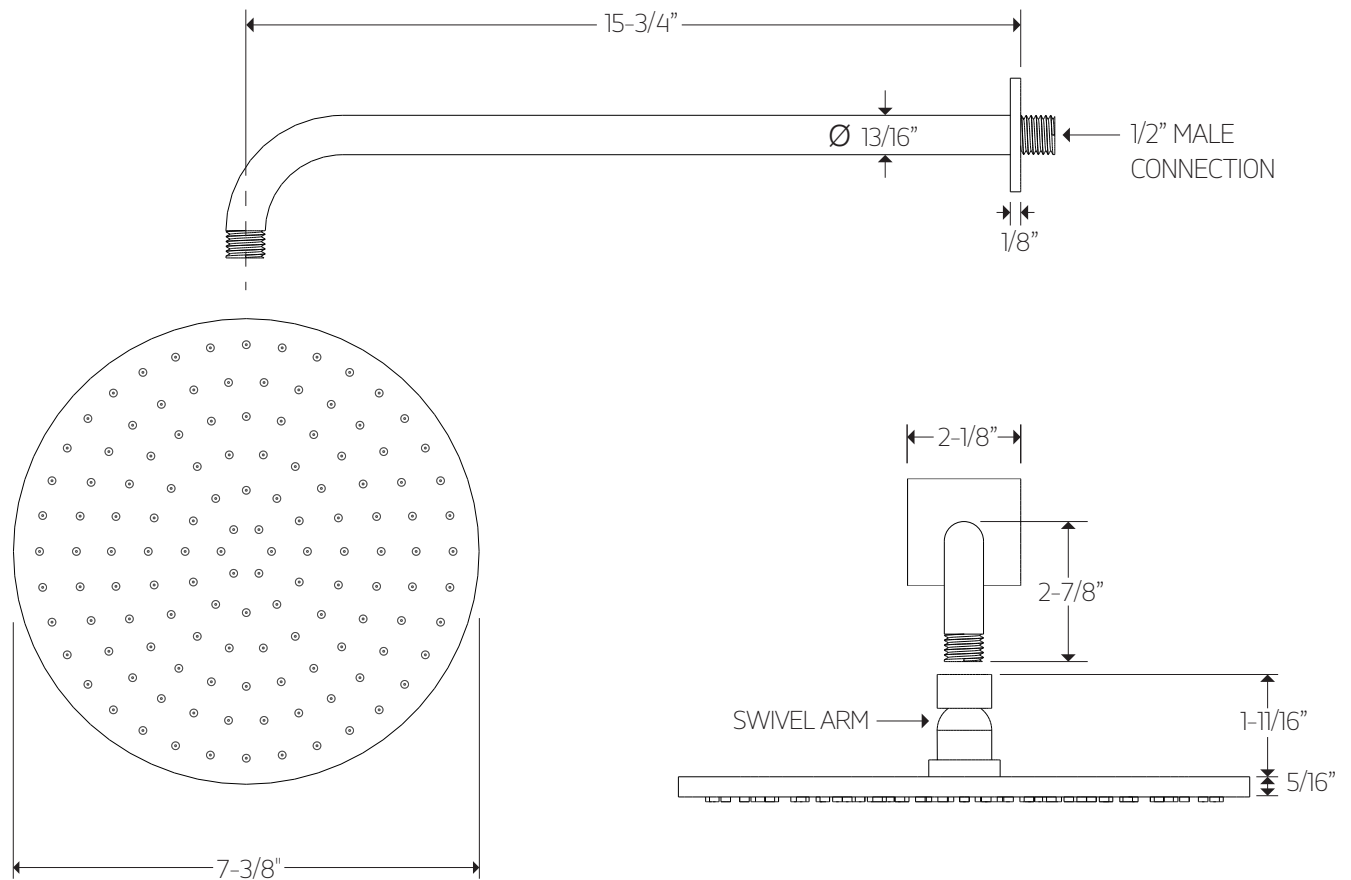


artos[®]


F907-32

8" shower rainhead, wall
mount arm r+s

STEP 1

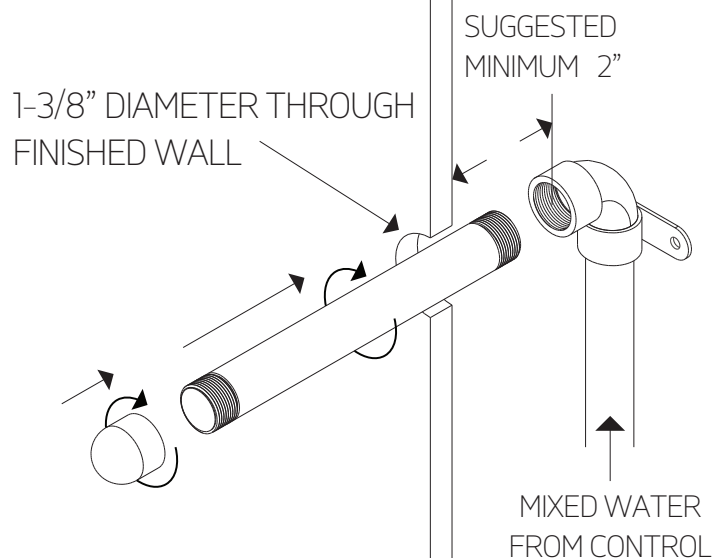


STEP 2

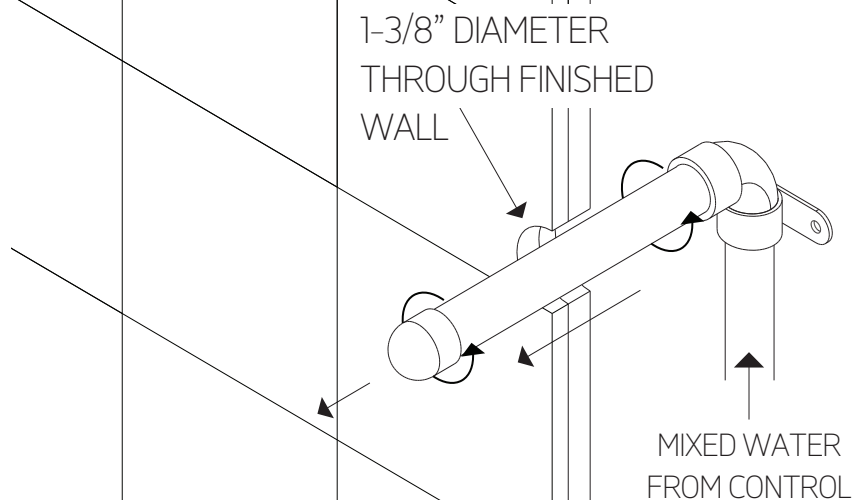


INSTALLATION STEPS

STEP 3

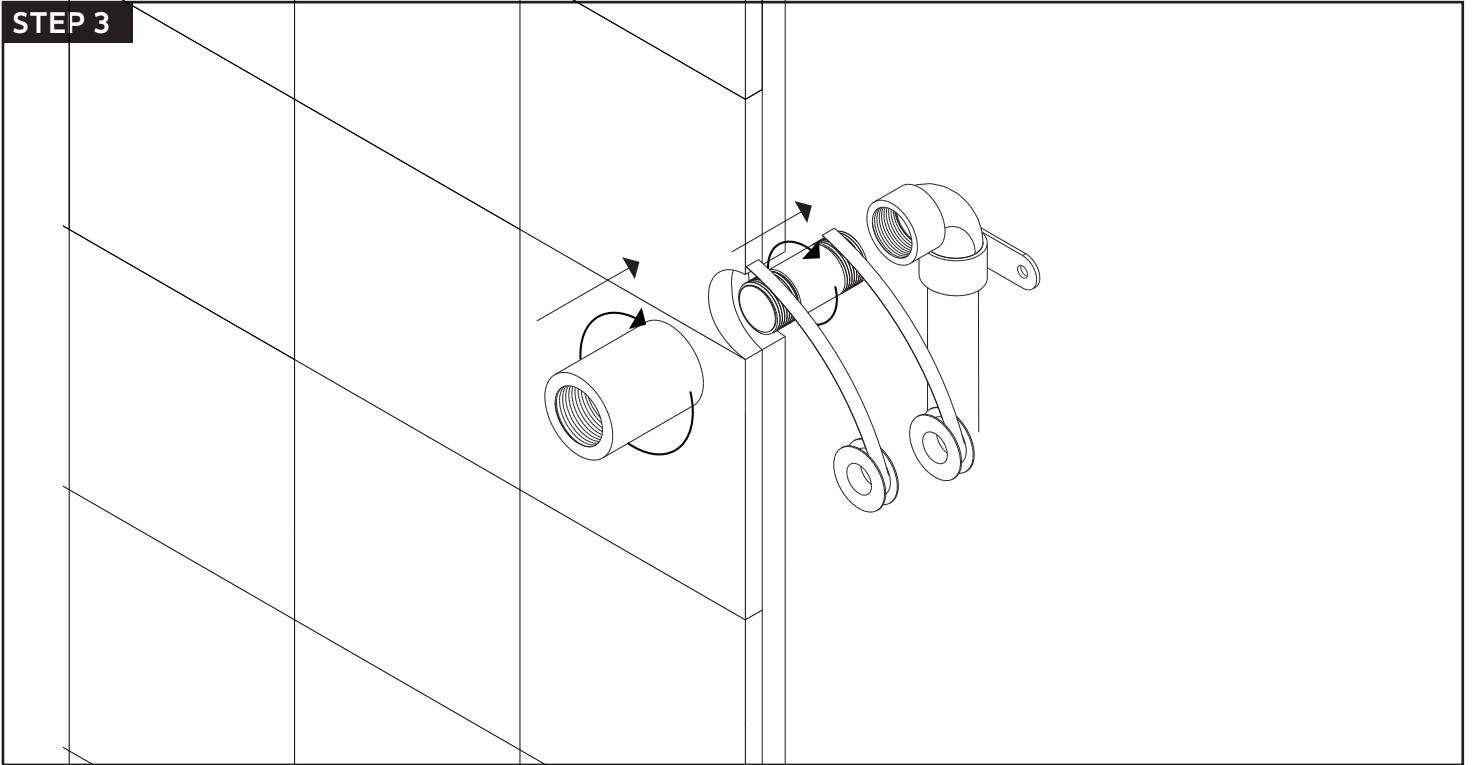

STEP 4

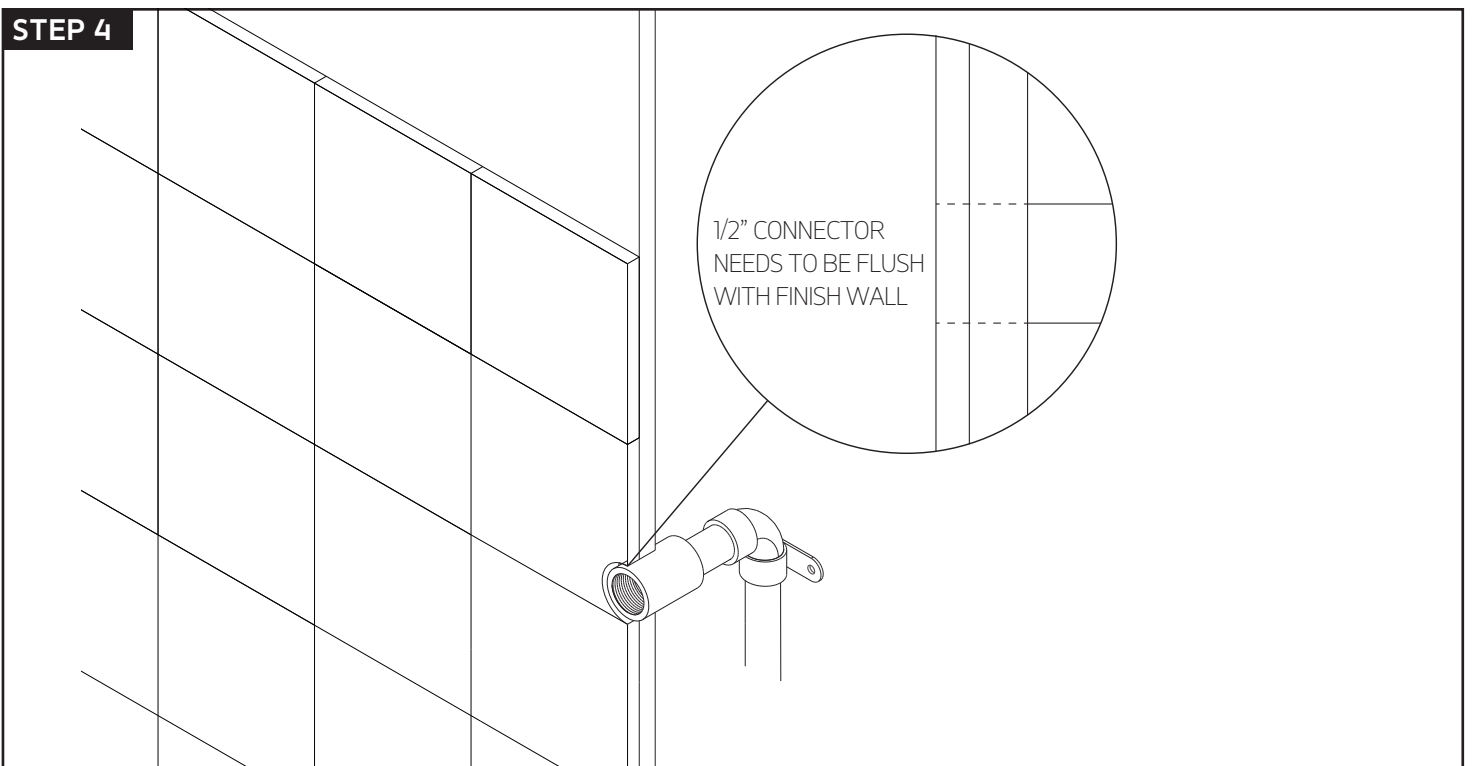


artos[®]


F907-32

8" shower rainhead, wall
mount arm r+s

STEP 5

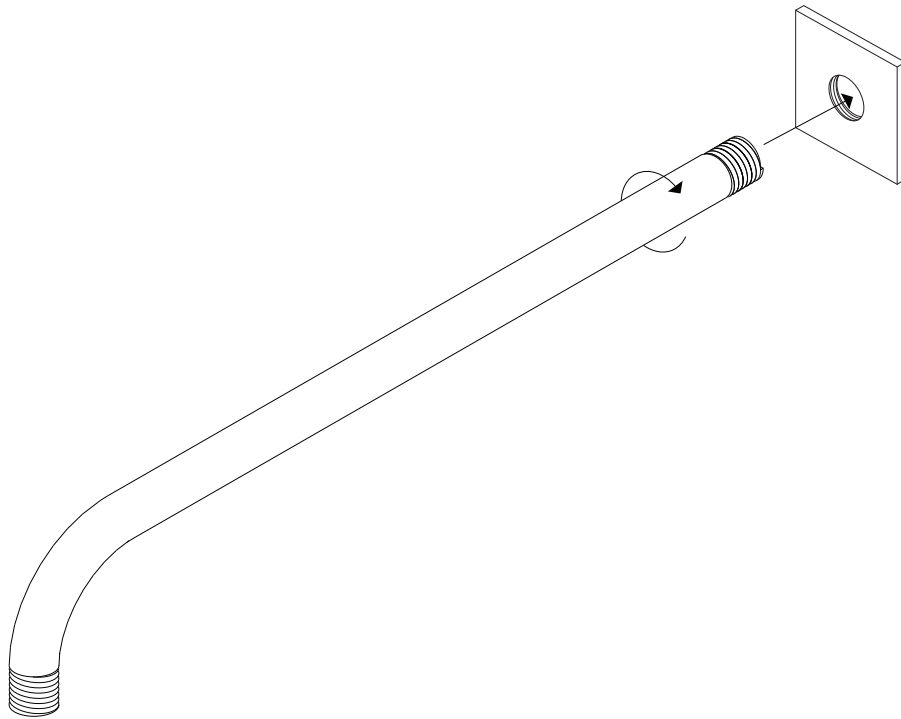


STEP 6

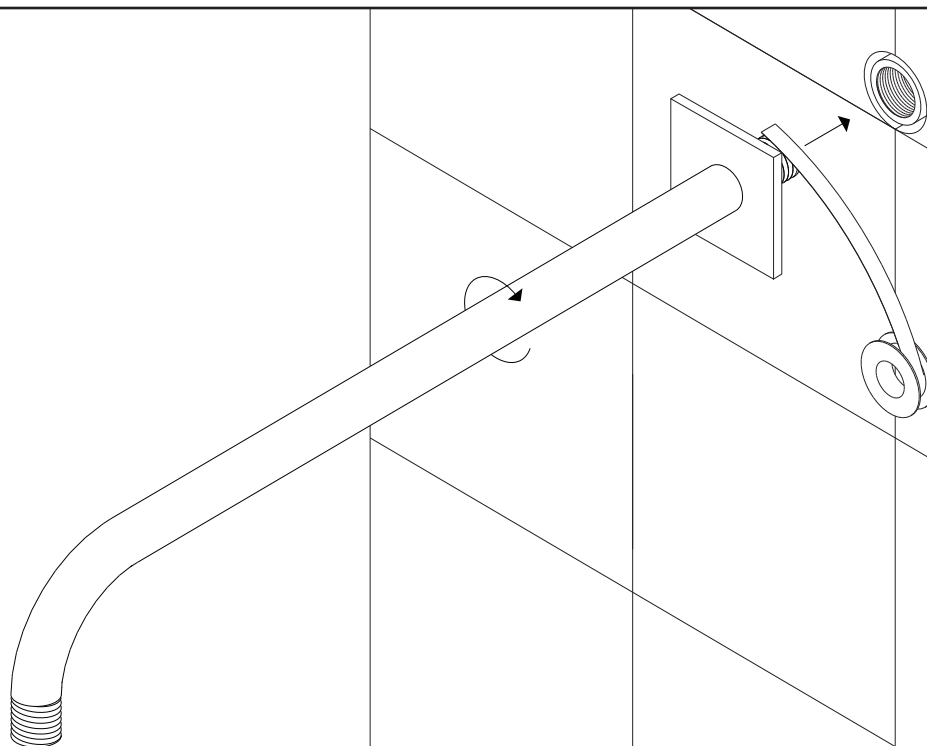

INSTALLATION STEPS

STEP 7

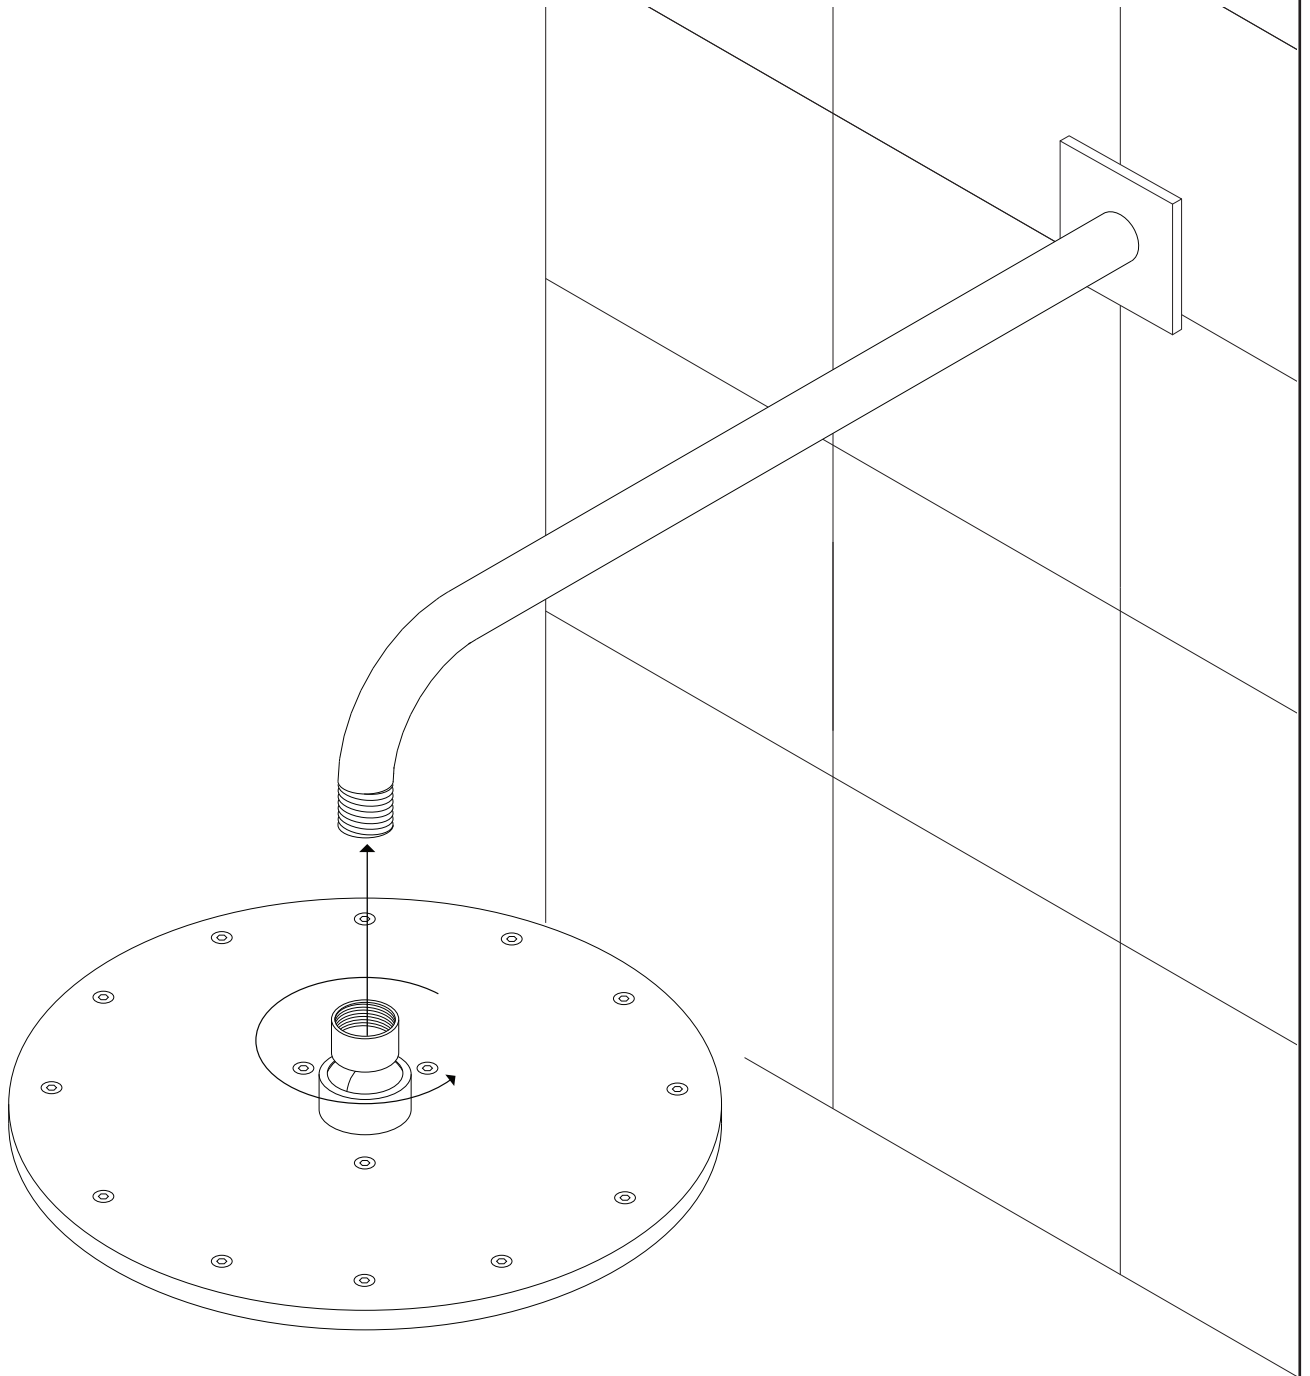


artos[®]

F907-32

PARTS BREAKDOWN

8" shower rainhead, wall
mount arm r+s

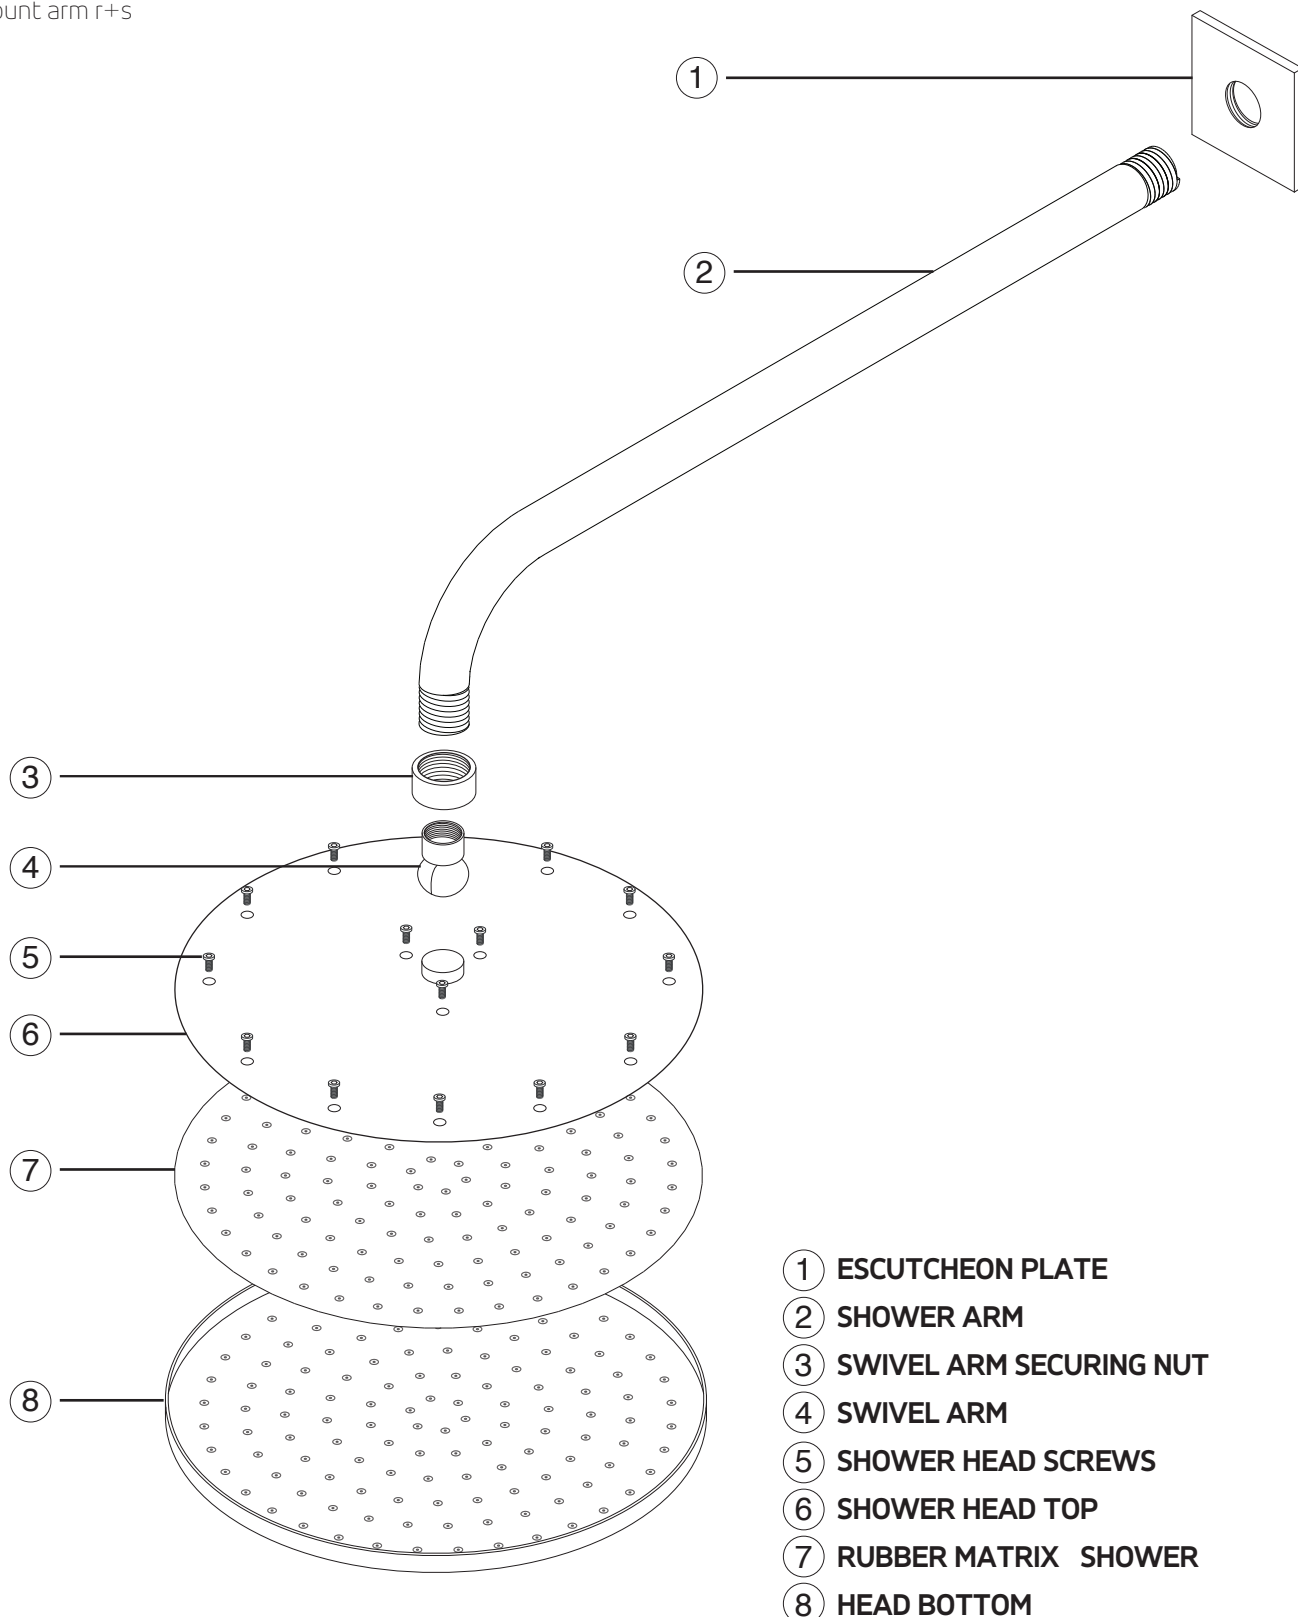

- ① ESCUTCHEON PLATE
- ② SHOWER ARM
- ③ SWIVEL ARM SECURING NUT
- ④ SWIVEL ARM
- ⑤ SHOWER HEAD SCREWS
- ⑥ SHOWER HEAD TOP
- ⑦ RUBBER MATRIX SHOWER
- ⑧ HEAD BOTTOM