


- ① Two wires are respectively threaded through all curved pipes, and two wire cores with white markings are pulled out from the middle vertex hole, forming one group in parallel and the other group in another
- ② Tighten the fixing screws
- ③ Screw in the hole and tighten it

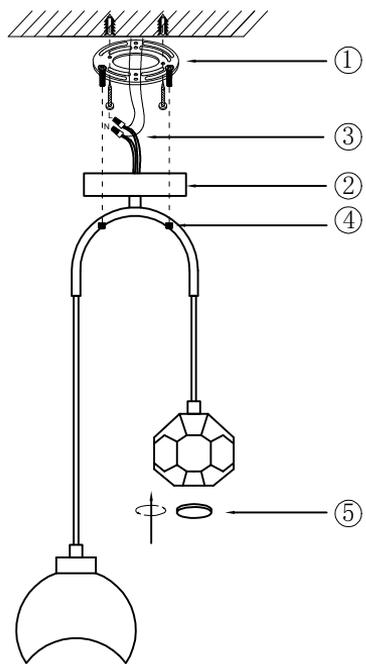

- ① Fixed hanging plate
- ② Fix the circular chassis to the metal elbow and tighten the nuts
- ③ Two sets of power cables are connected to the household power supply separately
- ④ Fixed nut
- ⑤ Install the crystal lampshade and tighten the lamp holder snap ring