

ASSEMBLY INSTRUCTIONS


ATTENTION:

1. Please read these instructions carefully before assembly.
2. Aluminum is soft metal over tighten may strip thread or break the part.
3. DO NOT use power tools.

Assembly steps:

1. Loosely attached the back(C) to the left arm(A) and right arm(B) with screws(E), flat washers(F), lock washers(G), nuts(H). DO NOT tighten the nuts.
2. Leave enough play for assembly the seat(D), push the seat to the gap between the arms, tighten with the screws(E),flat washer(F), lock washer(G) and nut(H).
3. Finally attach the nut cap(I) to the back nuts. Tighten all the screw.
4. Turn the chair onto its legs and use the adjuster feet to level the legs.

Warning : please do not use acid or alkaline washing liquid to clean the product.

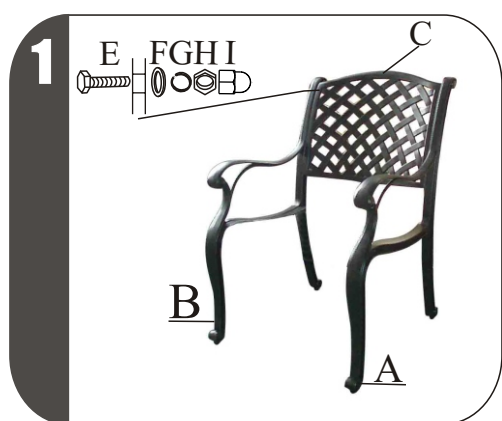

Parts list	Parts picture	Description	Q'ty		Parts list	Parts picture	Description	Q'ty
A		Left arm	1		E	(M8*35)	Screw	8
B		Right arm	1		F		Flat washer	8
C		Back	1		G		Lock washer	8
D		Seat	1		H		Nut	8
					I		Nut cap	4