

Please leave the chair in a shady outside for 1-2 days to deodorize.

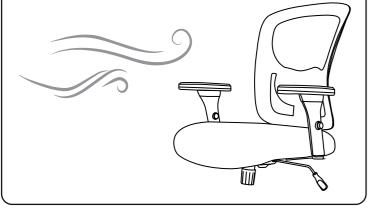

For longer use

Re-tighten bolts every 6 months by using the enclosed allen-key.

\*Using an electric drill can damage the chair. Please re-tighten bolts manually.



## **Safety Information**



chair, with your back to

the backrest



Do not sit at the front

edge of the chair



Do not stand on the chair



Do not use the chair with more than one person







Do not place all your weight on only the backrest



Model: C-9011

BHJ-Customer-Service@outlook.com (909)637-7665 | (909)637-7593



## **CAUTION:**


\* Before using the chair, check to ensure that all bolts are fully tightened. \* Lubricate all parts and tighten all bolts every 6 months or whenever needed.

# INSTRUCTION MANUAL **C-9011**

#### BHJ-Customer-Service@outlook.com **(**909)637-7665 | (909)637-7593 EST 9:00AM--17:00PM

### **Assembly Instruction**

### **Assembly Instruction**

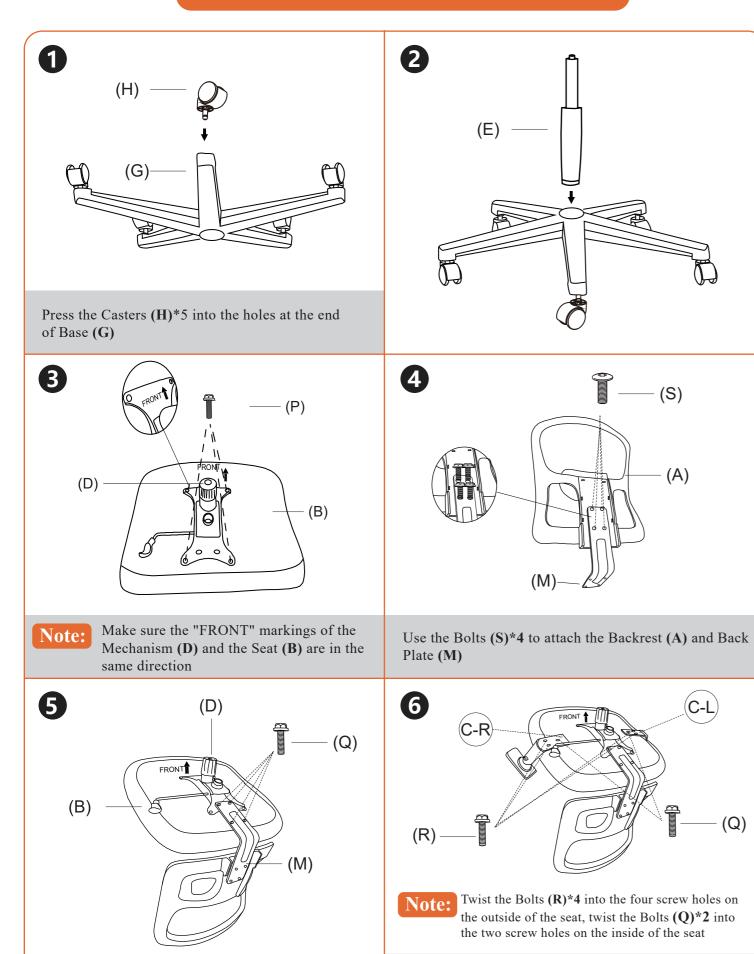

Use the Bolts (Q)\*4 to attach the Back Plate (M)

to the Seat (**B**) and Mechanism (**D**)


Use the Bolts (**R**)\*4 and Bolts (**Q**)\*2 to attach the Armrest (C) and the seat (B)

(Q)



Align the hole on Mechanism (D) with Gas Lift (E), and press the Chair down until it is fully secured.

e List	
(B)*1 Seat	C-R C (C)*2 Arm
(=) = ===	(-)
(H)*5 Casters	(l)*1 Wre
	Dunnun
(Q)*6 Bolts 6*40mm	(R)*4 Bolts 6*35mm
	(B)*1 Seat (B)*5 Casters (H)*5 Casters

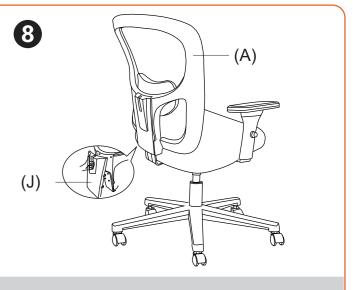

Buckle the Back Lid (J) into the slot of the Backrest (A)

