

⚠ WARNING:

- ▲ 1. For pets only.
- ▲ 2. Do not leave pet in stroller unattended.
- ▲ 3. Always apply the brake whenever the stroller is stationary.
- ▲ 4. The maximum weight capacity is 25kg.
- ▲ 5. Do not use any component not supplied by manufacturer.

Cleaning and maintenance:


- 1. Unsnap button on stroller;
- 2. Take apart the canopy;
- 3. Take out the cushion;
- 4. Wipe stroller slightly.

Pet Stroller Instruction Manual




**IMPORTANT, RETAIN FOR FUTURE REFERENCE:
READ CAREFULLY**

Install the pet cage

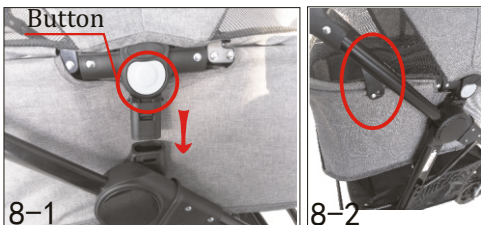


* Install the pet cage: Hold the pet cage by both hands and insert the connector joint into the socket till a sound "click" as picture 8-1. Then install the fixing hook

Folding product

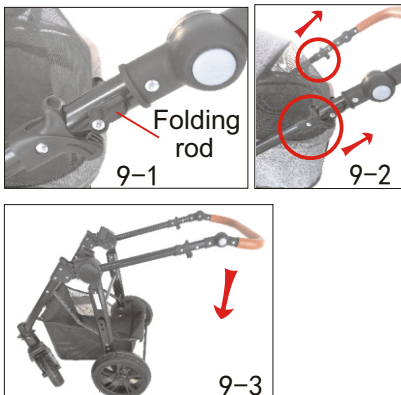

* Rotate the folding bar as shown in the figure, Pull up the connectors on both side of stroller at same time, press down the handle.


Operation frame

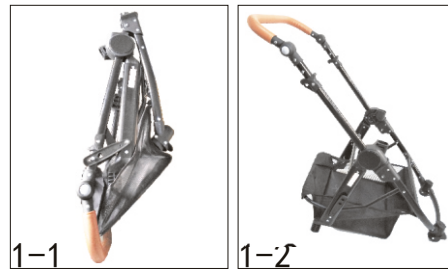

* Open the box, take the frame and all parts from pe bag, pull up the handle as picture 1-1.

* Keep pulling the handle upward till sound click.

ASSEMBLE PET BAG

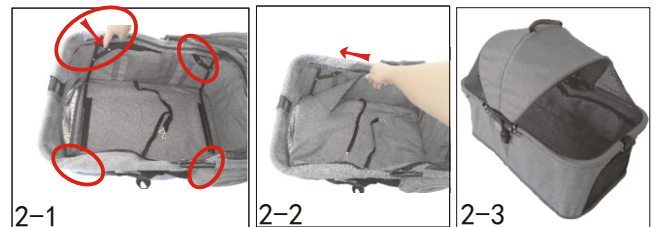

* Press the upholders on the 4 corners as figure 2-1.

* Pull up the bag as figure 2-2.

* Close the zipper as figure 2-3.


Warning:

Please make sure the stroller assemble correctly according to installation manual.

Component:




Safety belt

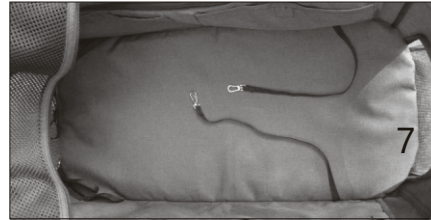

* Please use safety belt while the pet is in cradle.

Adjusting handle

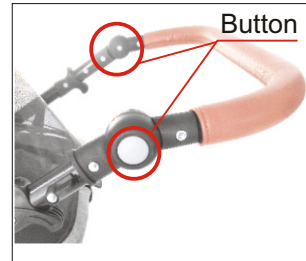


* Press down the buttons on both side of handle and then adjust

01


06

Assemble front wheels

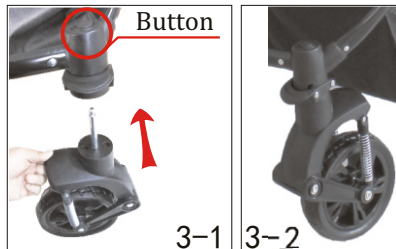


* Put on front wheels: push the front wheels on the frame till sound click as picture 3-1.

* Remove off front wheels: press down the button as picture 3-1, while pulling up the stroller by another hand as picture 3-2.

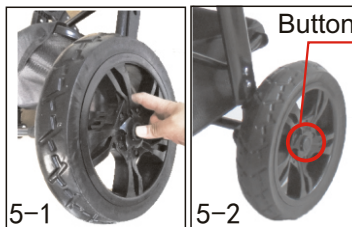


* Pressing down the button in the centre of wheels, put on the axle

Open the net part

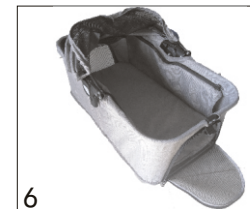

* Open and close the net part through zip as picture 6.

Assemble rear wheels

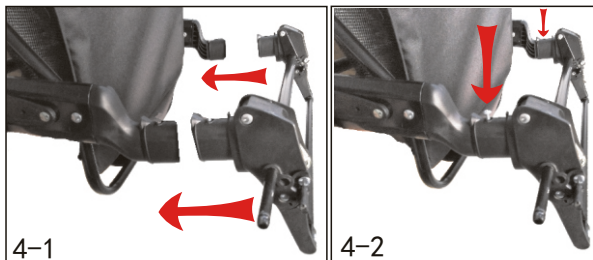

* Install the rear wheel mount, and then lock the screws.

Brake



* Brake rear wheels: step down the brake rode can park the stroller; pull upward the brake rod to unlock.

03

04