


Energy Saving FLUSH-MOUNTED CEILING FIXTURE

PACKAGING CONTENTS

- (1) Light fixture
- (1) Plastic diffuser
- (1) LED Module
- (1) Parts bag



Parts bag includes:

- A. (1) Crossbar
- B. (2) Long mounting screws
- C. (2) Short junction box mounting screws
- D. (3) Wire connectors

CAUTION

- Risk of fire/electric shock. If not qualified, consult an electrician.
- Before attempting to install or service, disconnect power at fuse or circuit breaker.
- Disconnect power and allow fixture to cool before changing bulb or handling fixture.

SAFETY INFORMATION

Read carefully for your own protection.

- Intended for indoor use only.
- Connect fixture to a 120-volt, 60Hz power source (any other connections void warranty).
- A qualified electrician or persons with experience in household wiring should complete the install.
- Installation of this fixture must be in accordance with the National Electric Code (NEC) and local building codes.

INSTALLATION INSTRUCTIONS


Mounting the Crossbar

1. Make sure the power is turned off at main fuse/breaker.
2. Begin by screwing the two long mounting screws (B) into the crossbar (A). (Figure 1)
3. Mount crossbar (A) to junction box using the two short junction box mounting screws (C) provided. (Figure 1)

Wiring Your Fixture

1. Connect the black house power wire (hot) to the black lamp fixture wire and secure with a wire connector (D). (Figure 2)
2. Connect the white house power wire (neutral) to the white lamp fixture wire and secure with a wire connector (D). (Figure 2)
3. Connect the copper lamp ground wire to an appropriate supply ground or a grounded junction box and secure with a wire connector (D). (Figure 2)

Note:
If fixture is mounted to a non-ferrous box, secure copper lamp ground wire to ground screw (labeled GND) on the crossbar (A) as shown:



4. After all wires are secure, place the fixture over the outlet box and align the long mounting screws (B) with the two large ends of the keyholes. Twist the base until the heads of the long mounting screws (B) slide into the narrow ends of the keyholes. Secure the fixture by tightening the long mounting screws (B). (Figure 3)

Installing the LED Module

1. Line up the two pins on the base of the LED module with the two holes in the mounting holes (Figure 4)
2. Once in place, grasp the base of the LED module and twist until the LED clicks into place.

Securing the Fixture

1. Screw the threaded mounting tube (E) into the base of the fixture. Place the glass shade over the base allowing the threaded mounting tube (E) to protrude through the bottom hole in the glass. (Figure 5)
2. Secure the glass shade to the fixture with the remaining nut (F). Place the bottom cap (G) onto the threaded mounting tube and secure with the finial (H). (Figure 5)

FIGURE 1

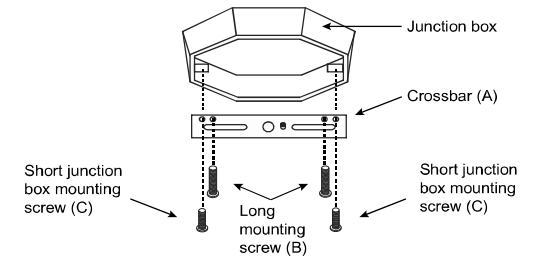


FIGURE 2

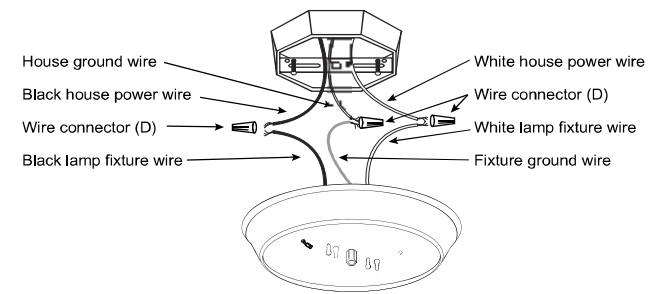


FIGURE 3




FIGURE 4




FIGURE 5

