PREMIUM TRUCK SCISSOR DOCK LIFT - WL-100-6-68

ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

STANDARD FEATURES

MODEL NUMBER: WL-100-6-68 UNIT TO BE MOUNTED: AT SURFACE OR IN PIT (CIRCLE ONE) CAPACITY (EVENLY DISTRIBUTED): 6,000 LBS

OVERALL PLATFORM SIZE: (72" X 96")

RAISED HEIGHT 70" ± 2" LOWERED HEIGHT: 10"

REMOVABLE HANDRAILS AND 4"NON-REMOVABLE TOE BOARDS 42" HT W/

21" MIDRAIL

TRUCK BRIDGE IS 72" W X 18" L AT **ROLLER END W/ CHAINS & HANDLES** FRAME SIZE IS: 62" W X 93" L

SHIPPING WT APPROX: 3200 LBS ± 6 1/2 HP POWER UNIT (SEE BOTTOM OF PAGE)

W/ 8' OF HYDRAULIC HOSE -HAND-HELD CONTROL ON A

4'-20' COIL CORD REFER TO THE UNIT'S ELECTRICAL

DIAGRAM FOR **ELECTRICAL SERVICE**

REQUIREMENTS

-INSTALL TO MEET ALL APPLICABLE STATE & LOCAL

CODES FOR YOUR AREA! 5" BEVELED TOE GUARD


ARCHITECTURAL REVIEW FOR **CORRECTNESS OF PIT AND FOR** COMPLIANCE TO LOCAL AND STATE

CODES IS RECOMMENDED.


DIMENSION TOLERANCE ± 1/4"

SPECIAL FEATURES

NONE

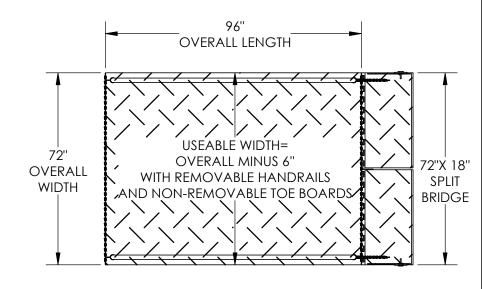

** STANDARD UNIT NOT INTENDED FOR SIDE CROSS LOAD **

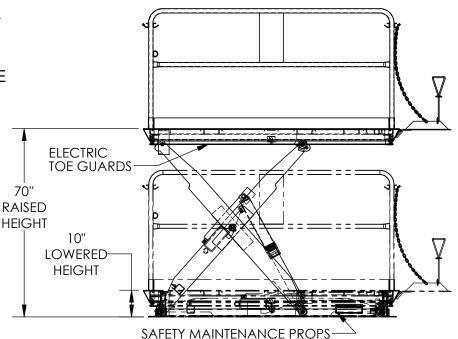

FOR INTERNAL USE ONLY PROJECT SIGN OFF Α **SALES** Ρ ENG. P FAB. R 0 **POWER** V HYDRAULIC UNIT OVERALL DIMENSIONS Α L 14"W x 33"L x 31"H (COMES W/ 8FT HOSE)

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ALL SPECIAL UNITS ARE NON-RETURNABLE [] As drawn [] As marked

Signed: Date:

> LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

