DREAMSIDEA

INSTRUCTION MANUAL

NO:12151

DREAMSIDEA

Tel.+1-562-510-9089

E-mail:support@dreamsidea.com

https://www.dreamsidea.com

EXPLODED VIEW

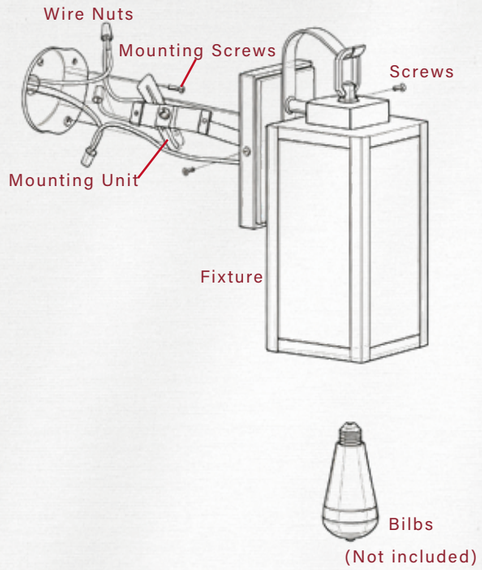

PARTS



Fixture

Mounting Unit

ATTENTION

Please inspect the wires before installation, if the wireshows any cut or abrasion,or has exposed copper wires,

DO NOT use the fixture,it might be caused during transportation or defect product.

Before starting installation of the fixture, please remove the previous fixture (if any).Disconnect the power by turning off the electric break for your property(Please ask for professionalhelp if reeded).

MAINTENANCE AND WARNING

- Verify the lamp model suits the environmentindoor/outdoor, IP rating) and check all accessories(body, screws, cord, manual).
- Only use with bulbs of the recommended type andwattage. Exceeding the maximum wattage maycause overheating or fire.
- Do not install the fixture if any part is damaged or missing.
- The fixture may become hot during use. Allow to cool before handling
- Clean dust accumulation in recessed lamps regularly(to prevent overheating), but only when powered off; never rinse with water.
- If the fixture includes a dimmer switch, ensure it is compatible with the fixture before installation.
- Do not modify the fixture in any way; tampering with electrical components can result in malfunction or risk of fire

HARDWARE TOOL LIST

①*2

Screws

②*2

Fixture screws

③*3

Wire nuts

TOOLS REQUIRED

Ladder

Safety glasses

Electrical tap

Phillips screwdriver

Flat blade screwdriver

Pliers

Wire strippers

STEP 1

Unscrew the ball nuts from the mounting unit.
Use the mounting screws to attach the mounting unit to the junction box.

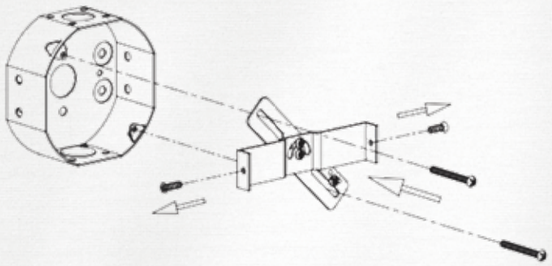

STEP 2

Make the electrical connection from the junction box to the fixture.Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape.

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:	Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:
Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.	White Supply Wire or Insulated Wire (other than green) with silver conductor

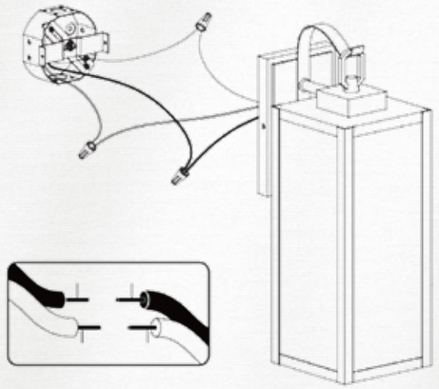

STEP 3

Attach the fixture to the mounting unit through screw holes as shown, and secure it with screws.

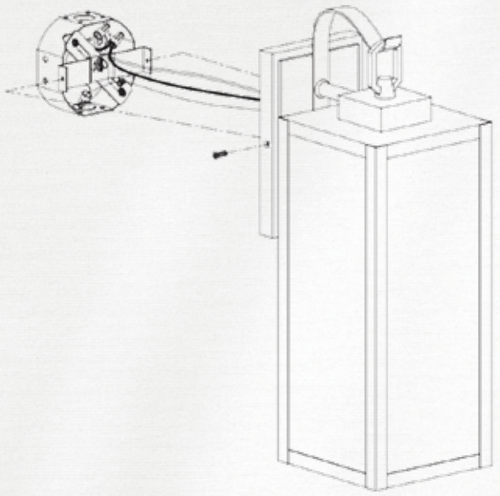

NOTICE: Please use caulk in the back plate and wall mounting surface to prevent water from entering.

STEP 4

Install the light bulb into the socket as shown. (light bulb not included)

STEP 5

Congratulations! You have finished the assembly, thank you again for choosing our product! Please enjoy!

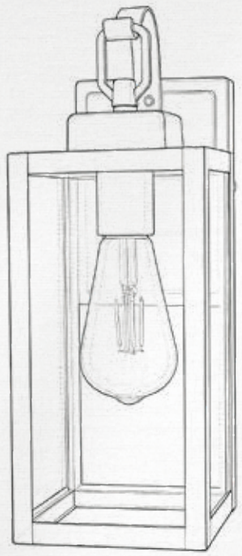

Product Overview