
ASSEMBLY INSTRUCTION

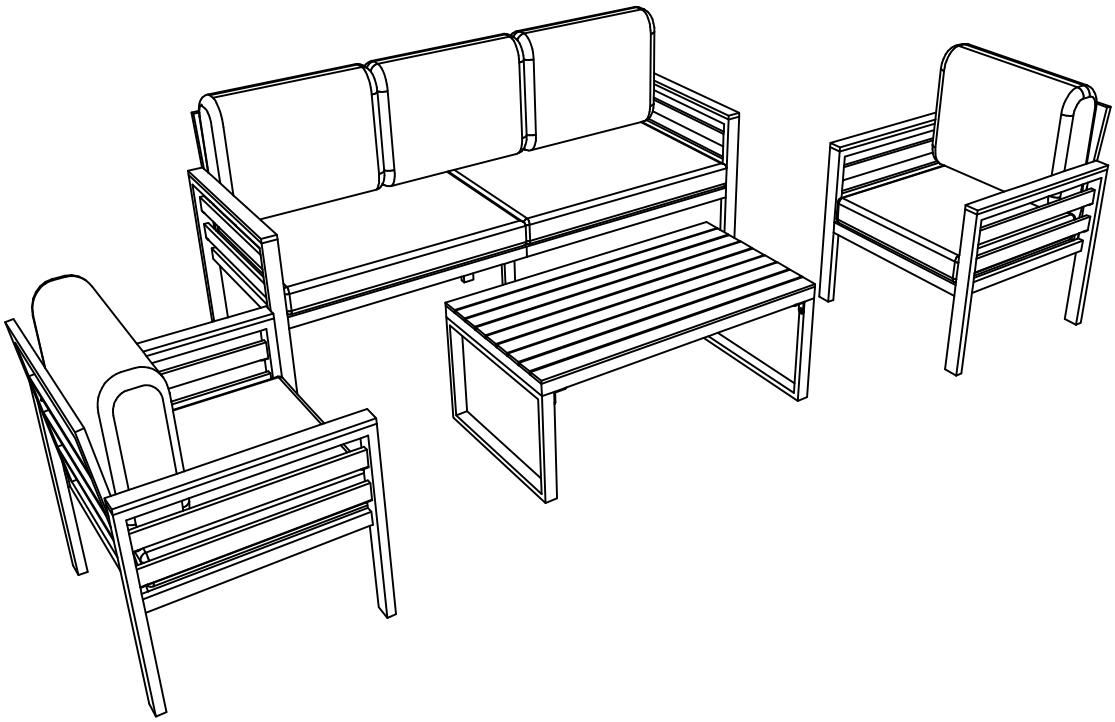


Notice:


1. 50% Tighten before fixing all screws, Allen wrench is recommended instead of an electric drill.
2. Place the item on a flat ground to adjust and make sure it remains stable.
3. Tighten up all screws with tools gradually.
4. If the screws are not aligned with holes during assembly, please loosen all the other screws to 50% and continue the assembly process.
5. If the item is not stable, please loosen all the screws, adjust it on a flat ground and tighten up all screws again.
6. Note : If one or some screws are fully tightened during assembly, chances are the others will not be aligned with holes. In addition, all the holes are designed to be relatively larger to provide more space for the adjustment of the screws.

Exployed View


x2

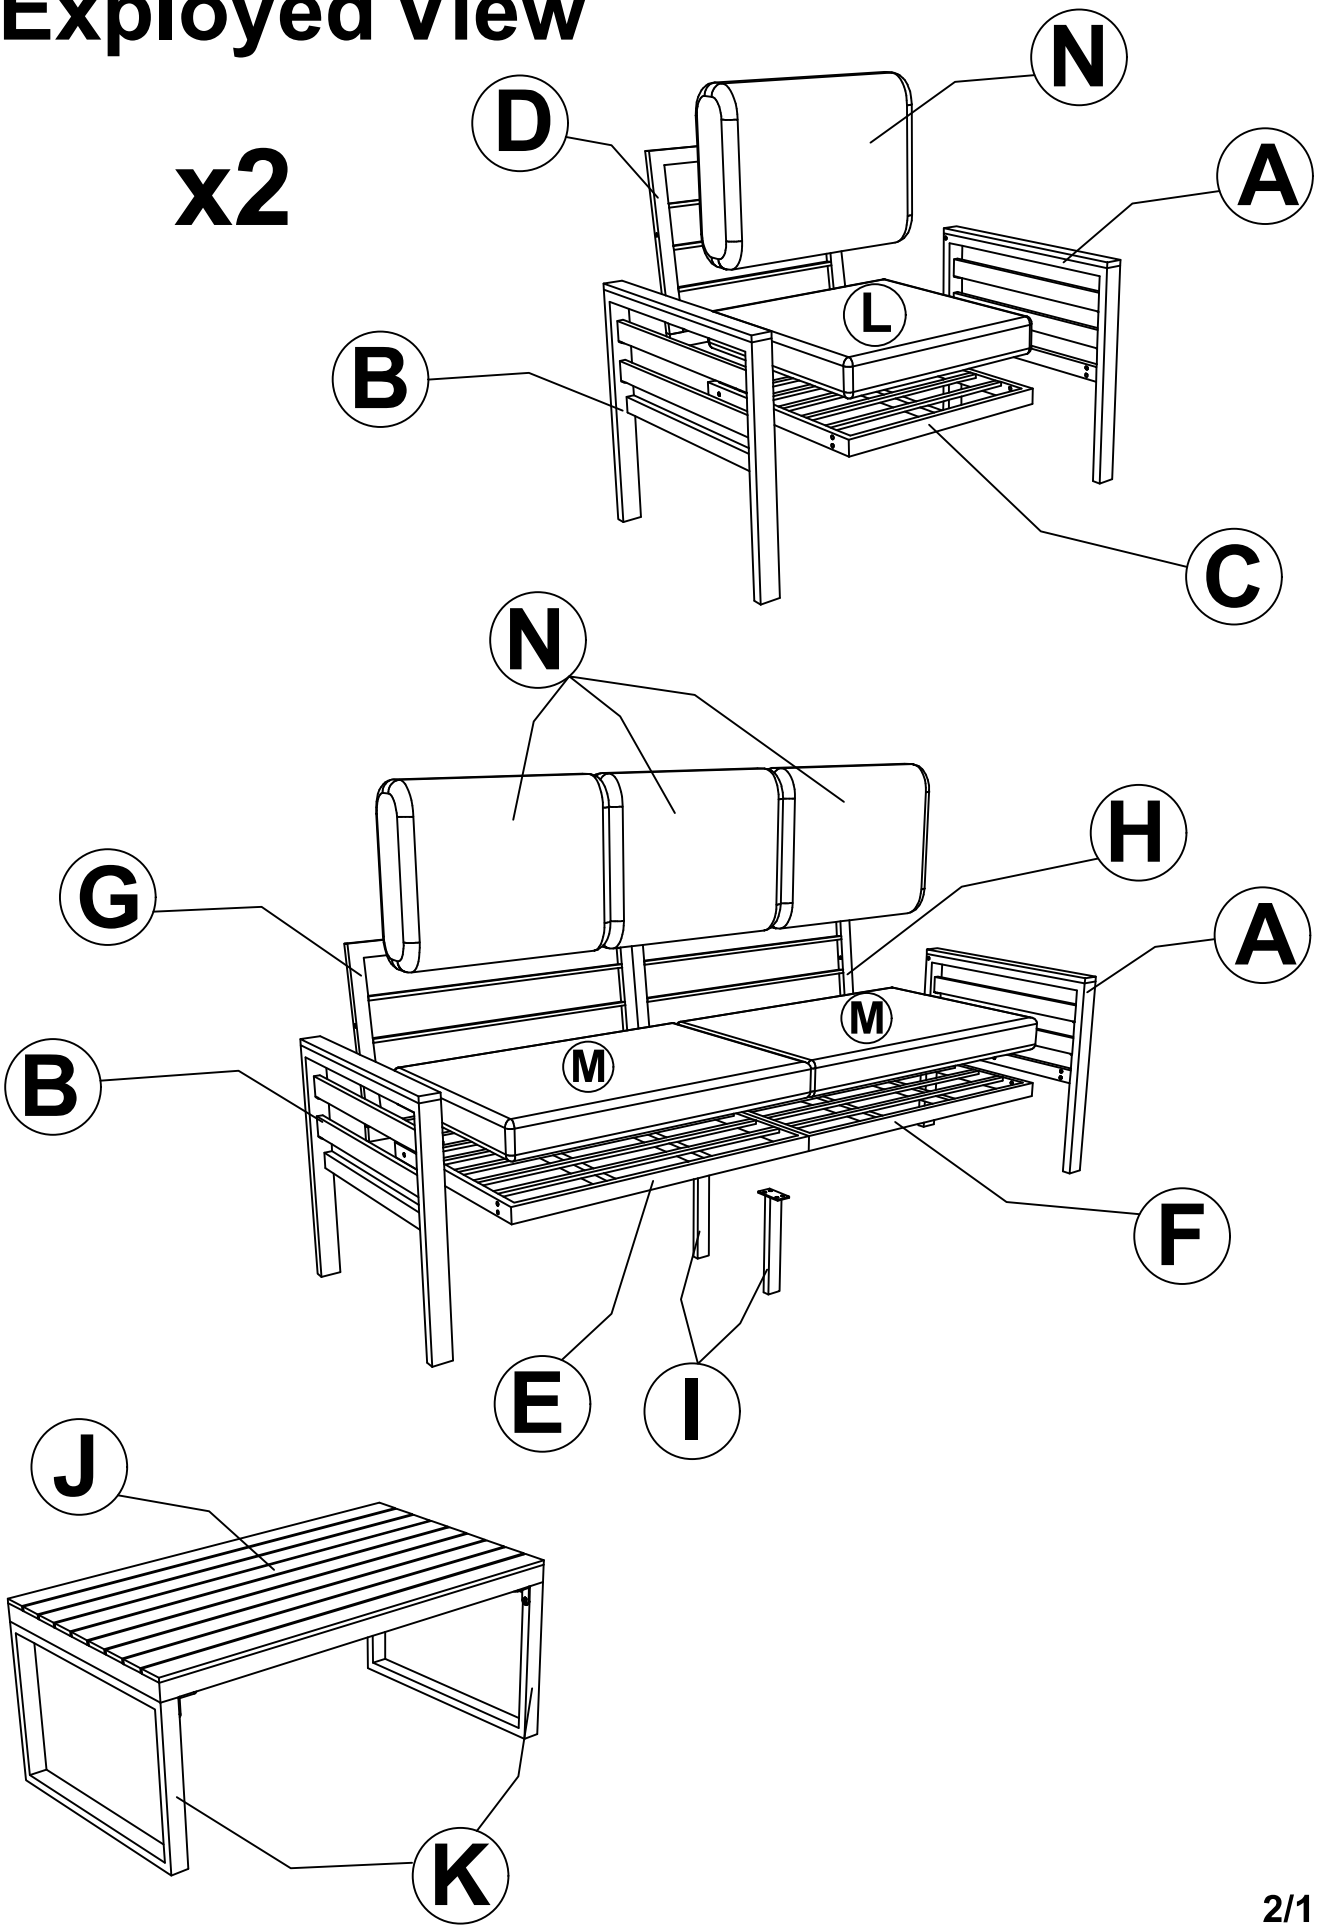


PART LIST




Ax3




Bx3




Cx2




Dx2




Ex1




Fx1




Gx1




Hx1




Ix2

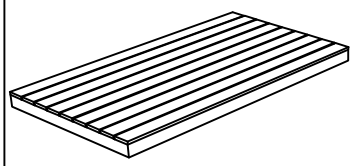


Jx1




Kx2



Lx2




Mx2




Nx5


HARDWARE LIST




1- Washer : 64 pcs
Extra : 2 pcs




2- Bolt 6x15: 16 pcs
Extra : 2 pcs



3- Bolt 6x35 : 40 pcs
Extra : 2 pcs



4- Bolt 6x55 : 8 pcs
Extra : 1 pc




5- Bracket: 4 pcs




6- Allen key : 2 pcs


CARTON CONTENT :




Cx2




Dx2




Lx2




Hardware




Ex1




Fx1




Gx1




Hx1




Mx2




Nx2




Ax3




Bx3




Ix2



Jx1




Kx2




Nx3

Step 1

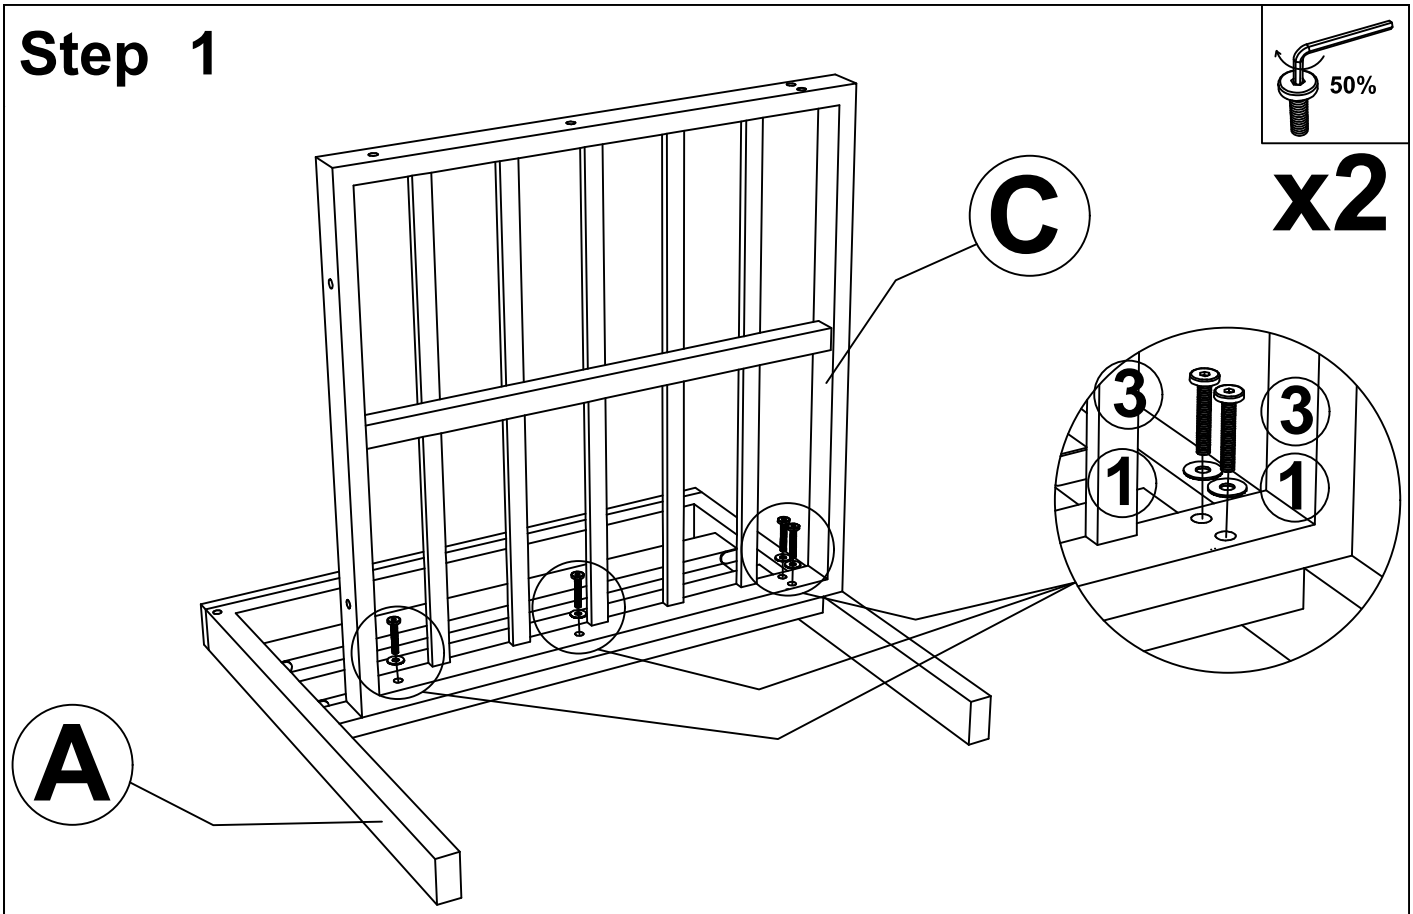


Ax1 Cx1 ①x4 ③x4

Step 2

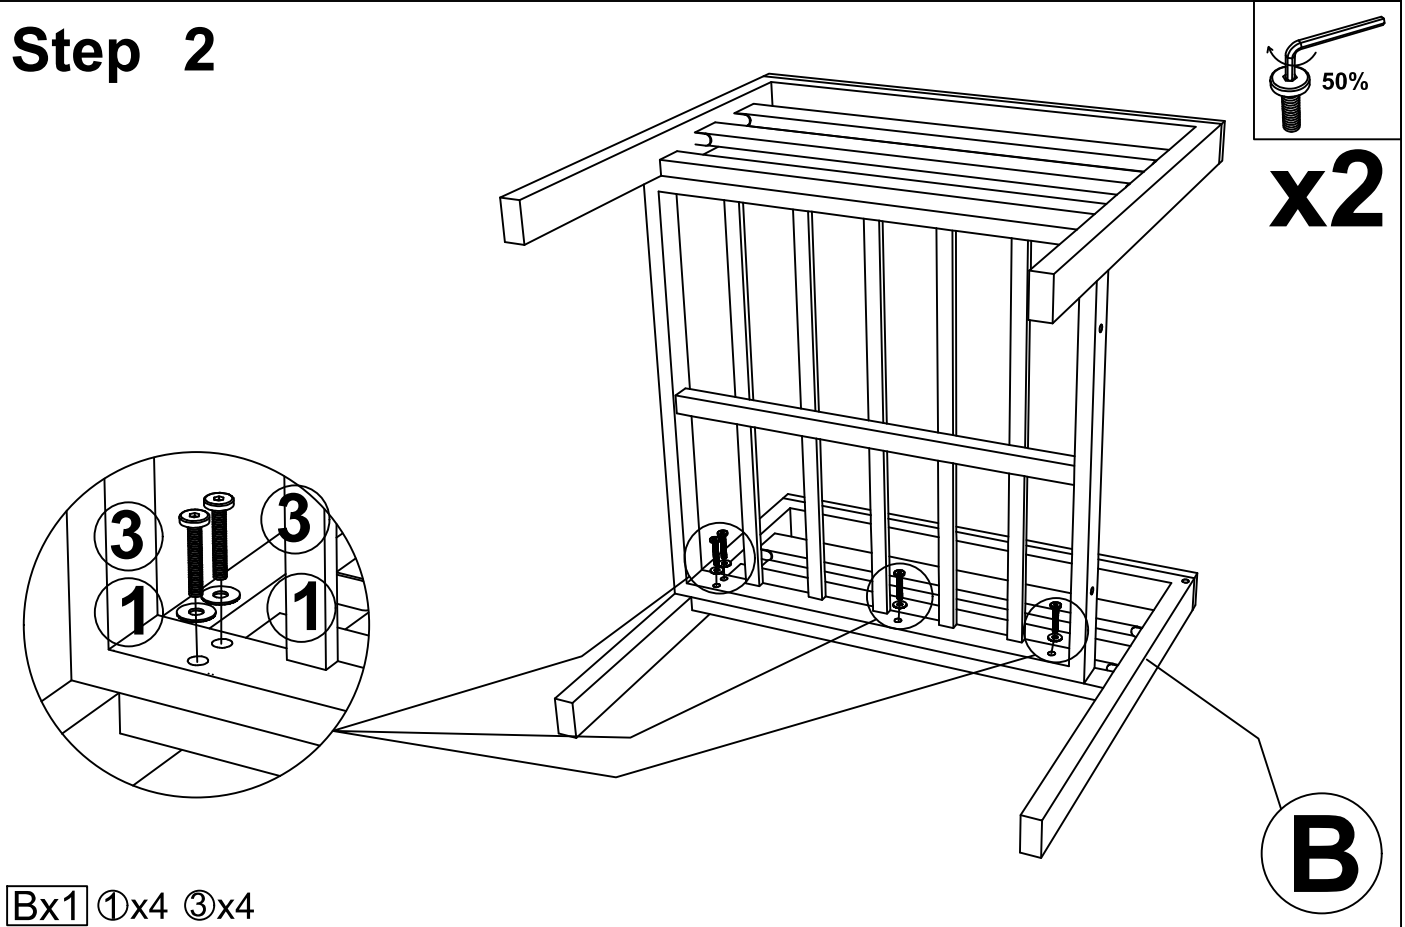


Bx1 ①x4 ③x4

Step 3

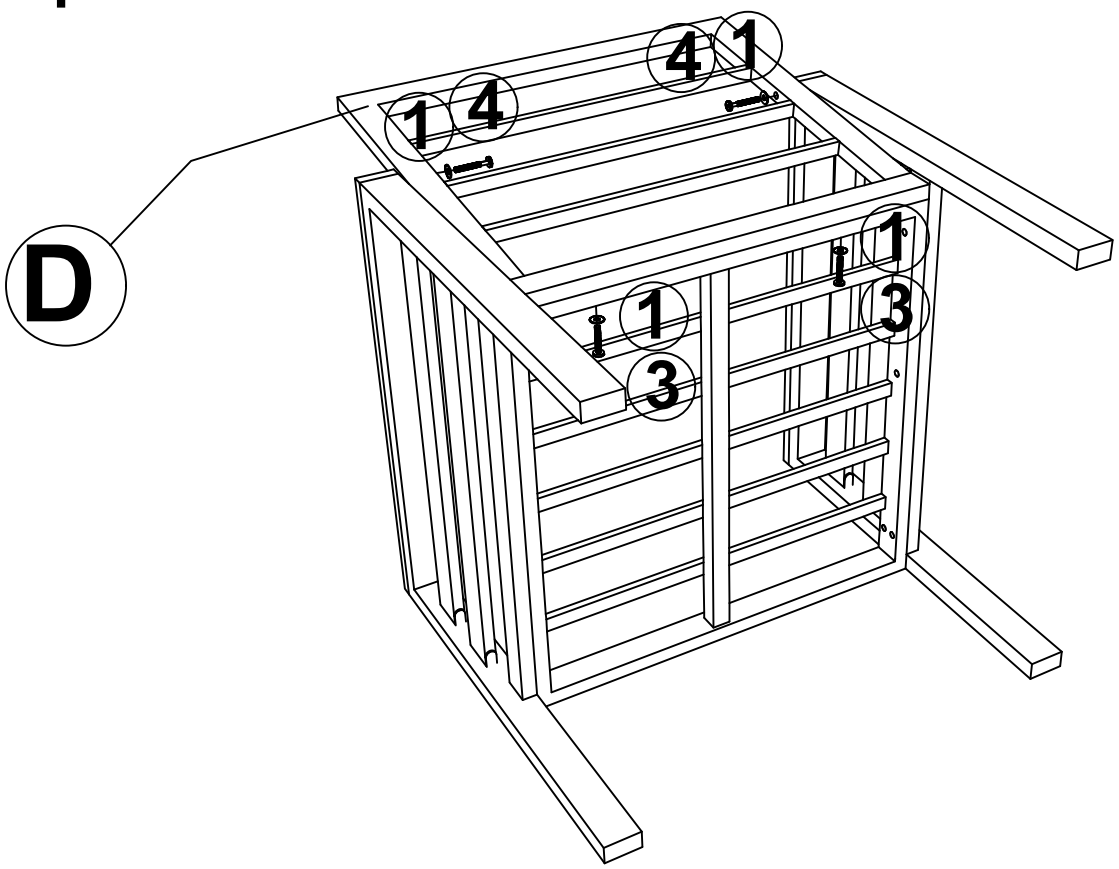


Dx1 ①x4 ③x2 ④x2

Step 4

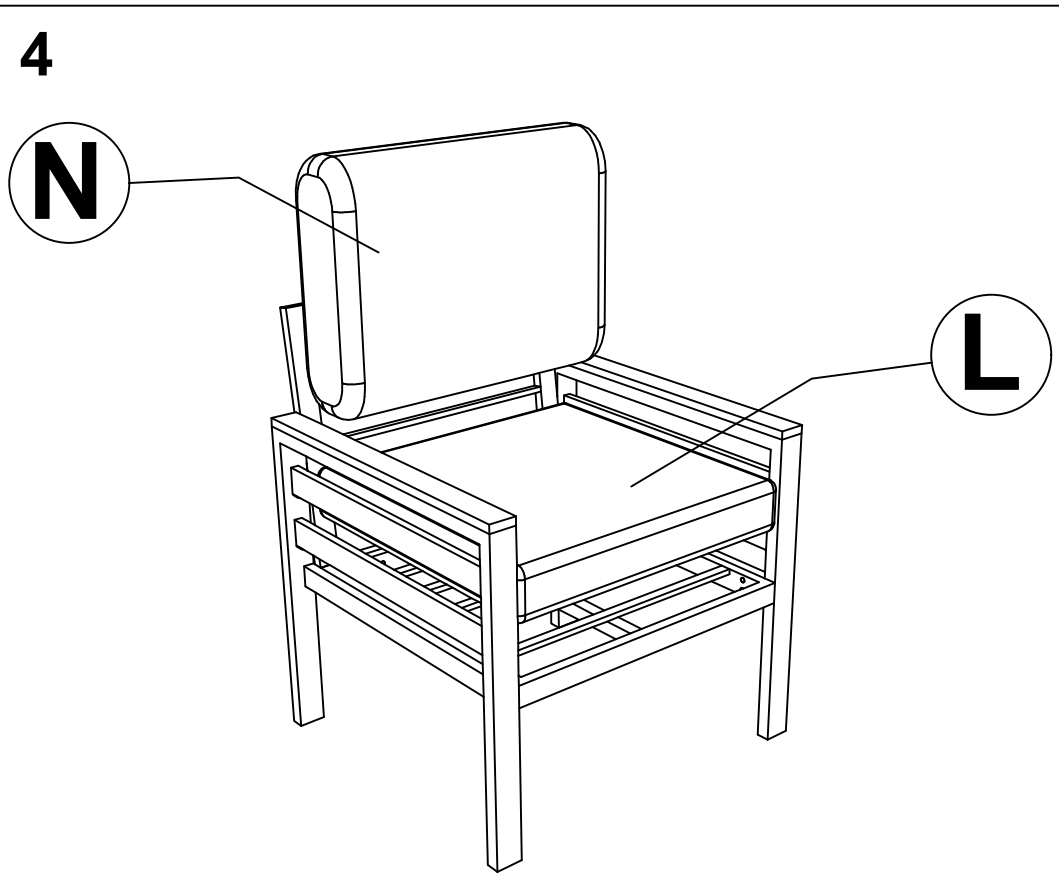


Lx1 Nx1

Step 5

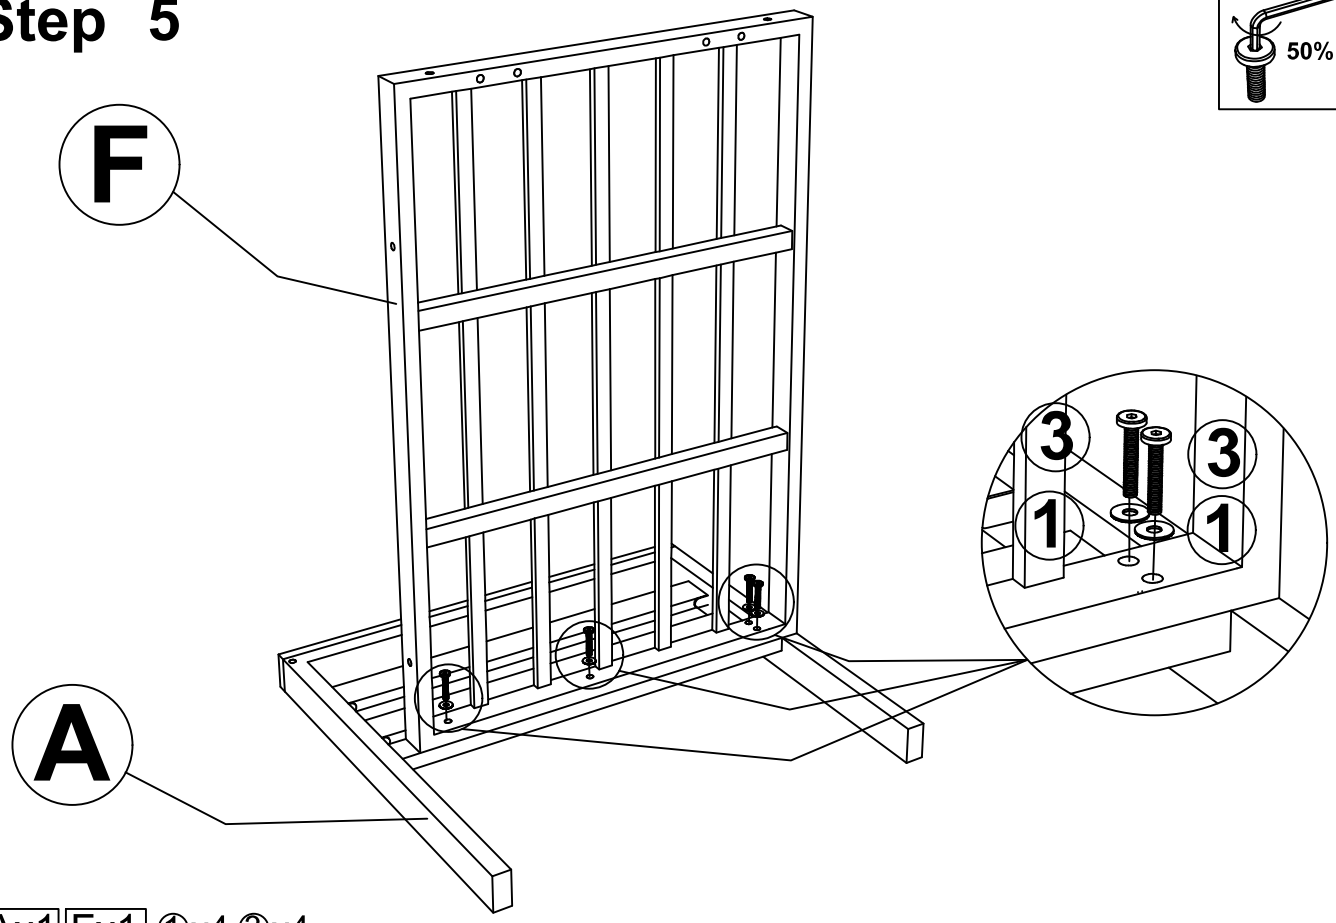


Ax1 Fx1 ①x4 ③x4

Step 6

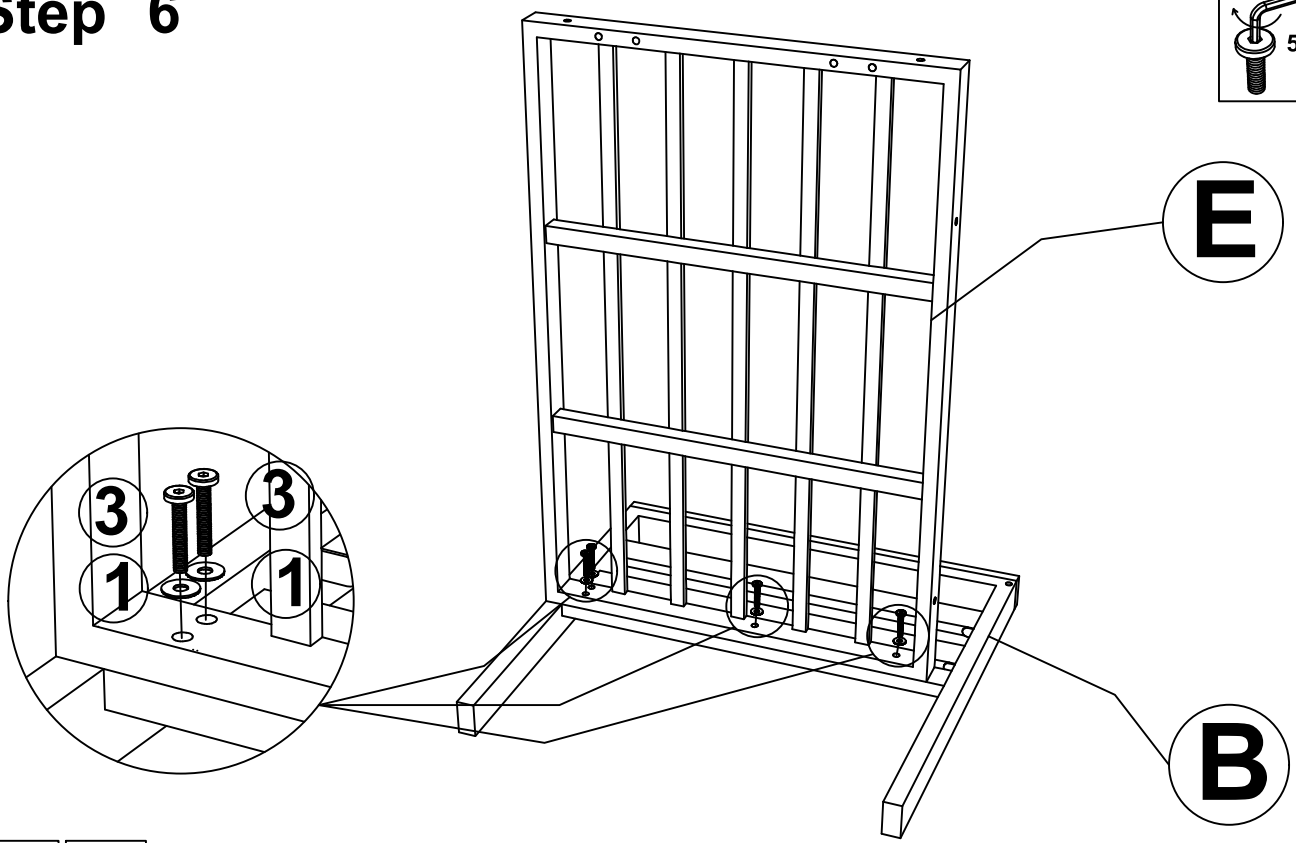


Bx1 Ex1 ①x4 ③x4

Step 7

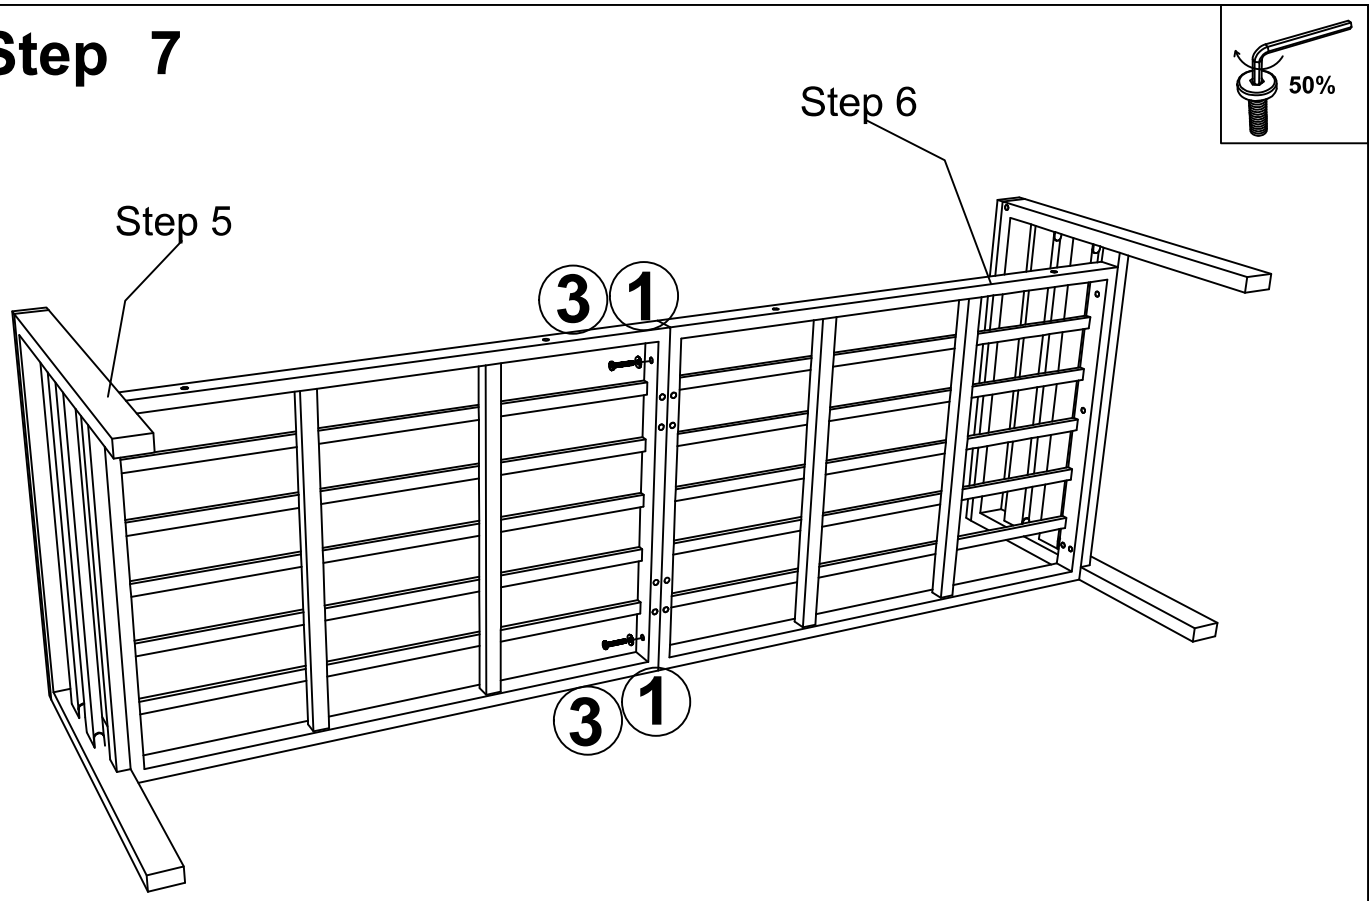


Step 5 Step 6 ①x2 ③x2

Step 8

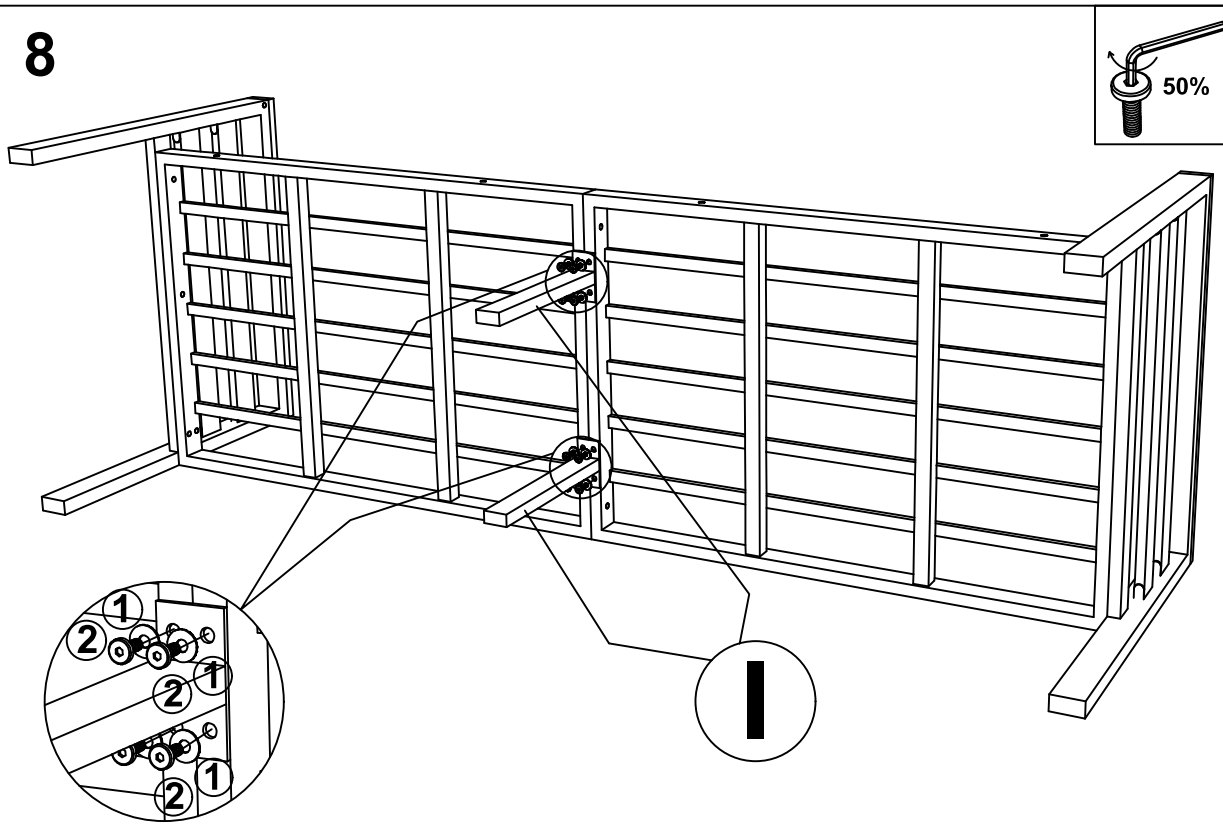

Ix2 ①x8 ②x8


Step 9

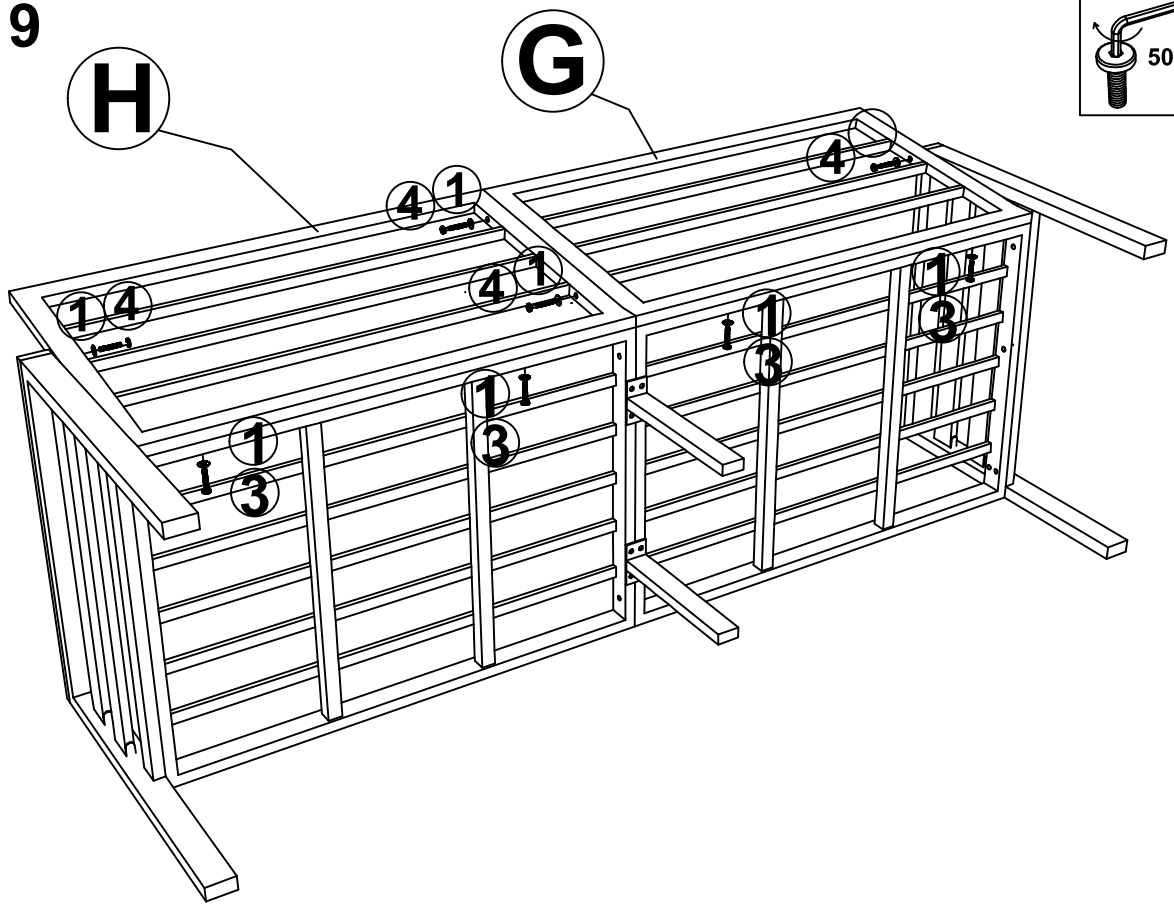

50%

Gx1 Hx1 ①x8 ③x4 ④x4


Step 10

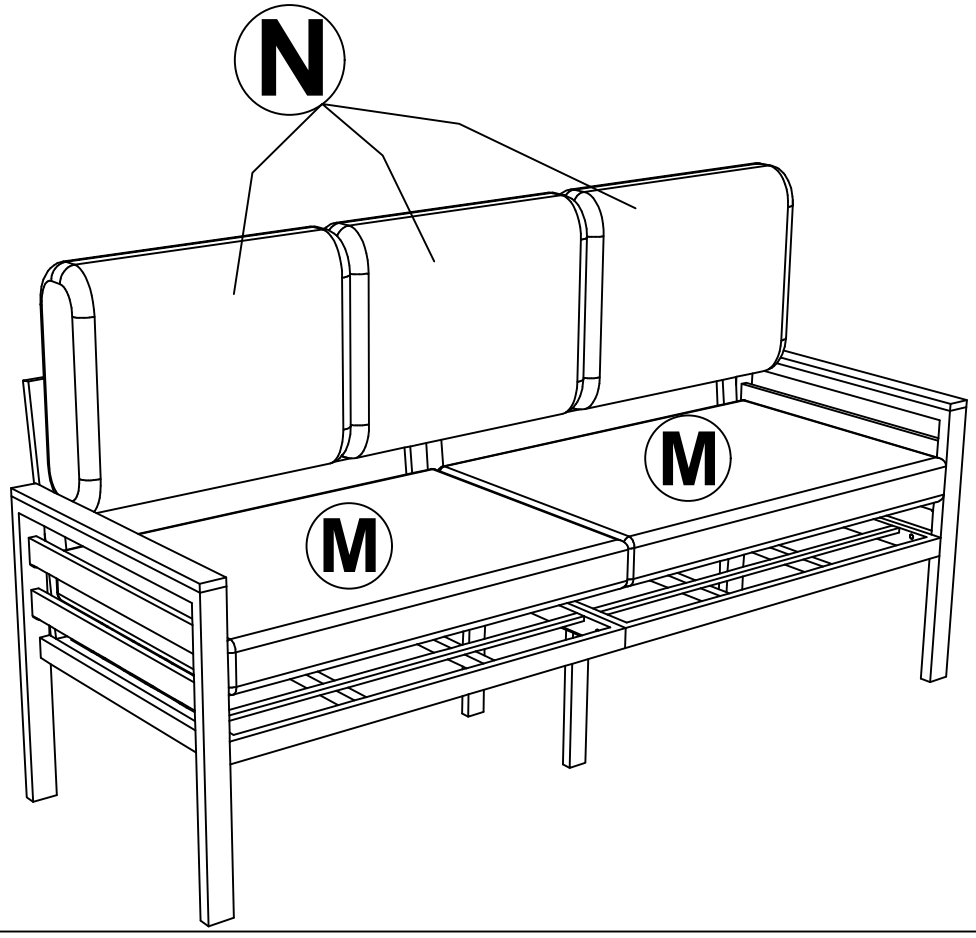

100%


Mx2 Nx3

Step 11

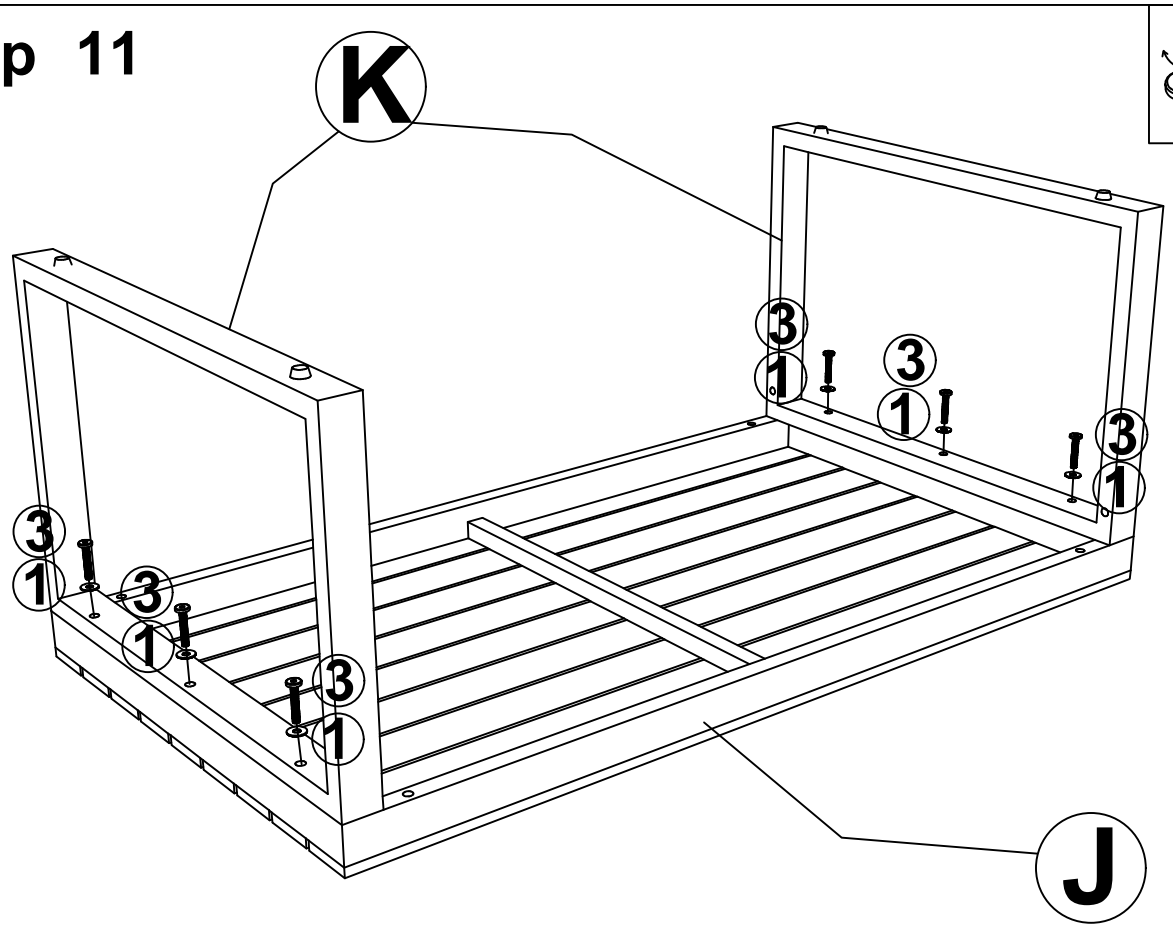


Jx1 Kx2 ①x6 ③x6


Step 12

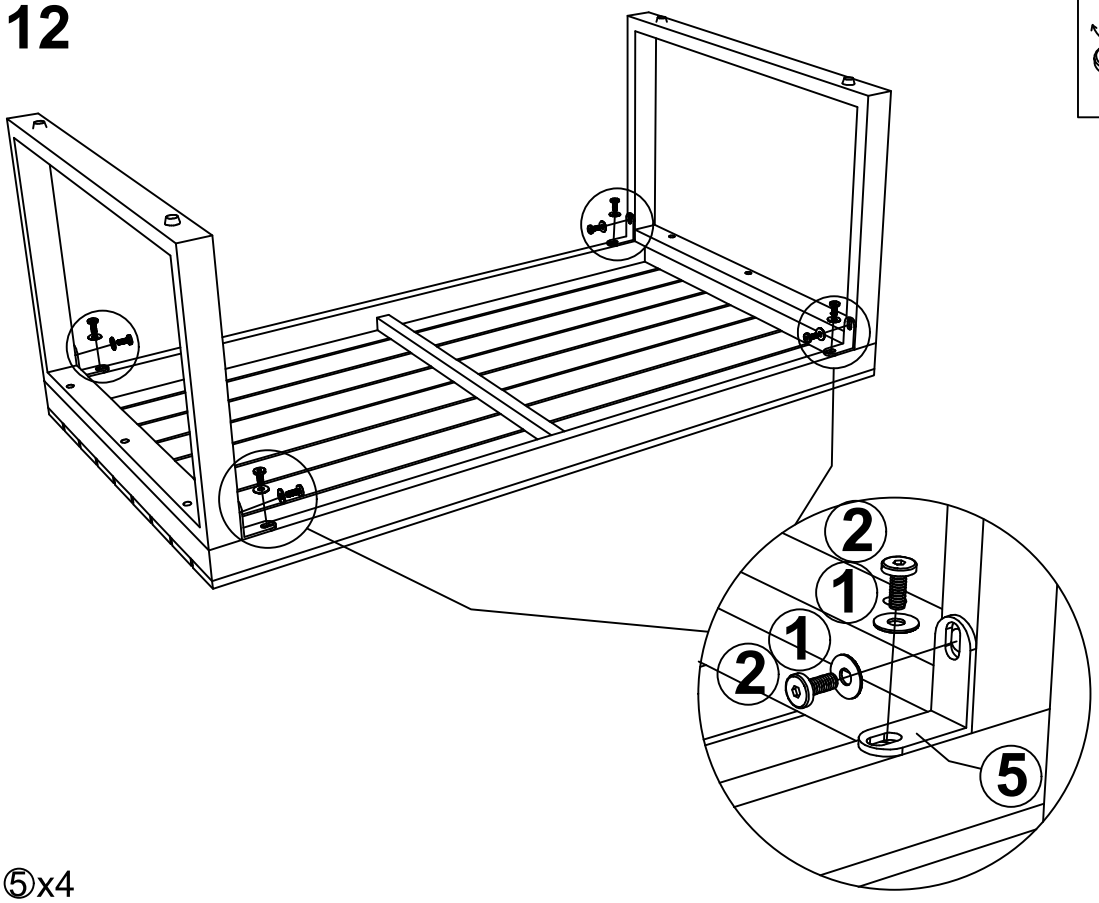


①x8 ②x8 ⑤x4

Step 13



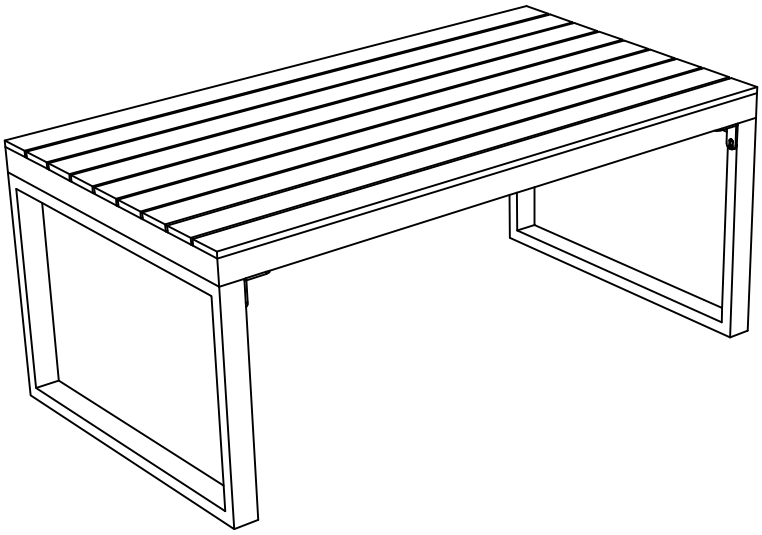

Step 14

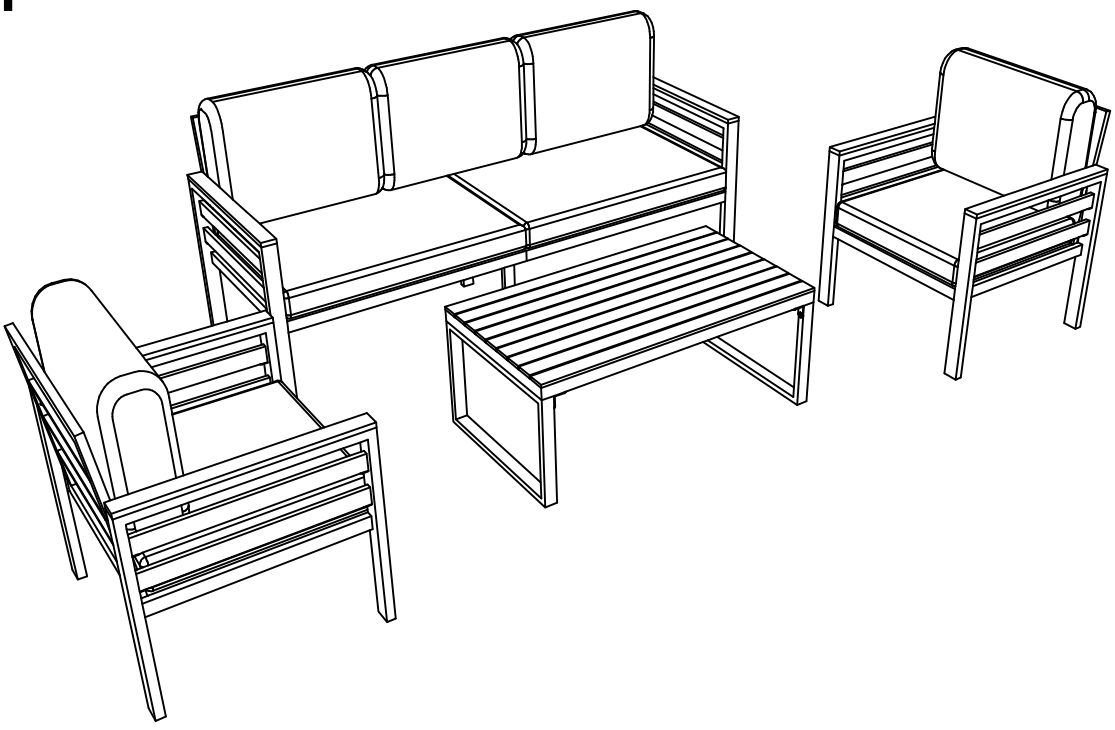

Finish