

Installation Guide

Note: The package contains parts bags with legs and screws. Please find them and be careful not to throw them away with the outer package.




Leg A*2

(The legs on both sides of the bottom of the sofa.)



Leg B*4

(The supporting leg in the middle of the sofa.)

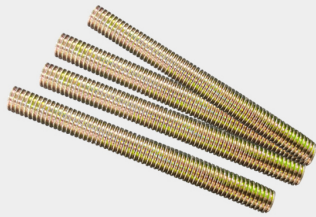

Screw rod*4

(The metal connecting screw rod of Leg B.)



Screw*8

(The screws used to fix Leg A.)


Obtain the following installation tools in advance



Electric Screwdriver

(Recommended use)

OR

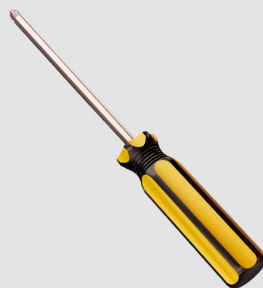

Screwdriver



Claw hammer

(Used to remove transport wooden frame and sofa protection feet)

REMOVAL OF PROTECTIVE FEET

There are protective foot pads at the four corners of the bottom of the sofa (as shown in the image). Remove them before the installation.



Break it with a claw hammer. then use the claw end of the hammer to pull out any nails that are exposed. (As shown in the picture)



Installation position display



The installation of Leg A



Image 2



Image 1

As shown in Image 1, press the front side of Leg A by hand to align the holes on Leg A with the reserved holes on the bottom of the sofa. After the top A hole is aligned as shown in Image 2, first screw in the screw to fix the leg, but don't tighten it for the moment. Then, using the diagonal installation method, screw in the screw at the D hole. After that, screw in the screws into the remaining two holes. Finally, tighten the four screws with a screwdriver. (PS: If the holes cannot be aligned, you can try swapping with the other Leg A.)

The installation of the middle leg




First, screw 4 screws into the B leg. then hold the B leg and screw the other end into the reserved hole in the of the sofa.



Image 3

The connection and fixation of the sofa modules.

Humanized design the size of this sofa is relatively long. In order to easily get in and out of the elevator and up and down the stairs we adopt the combined design. In the middle of the bottom of the sofa, there is a metal buckle for connecting and fixing. Simple operation just connect the two sides of the accessory.

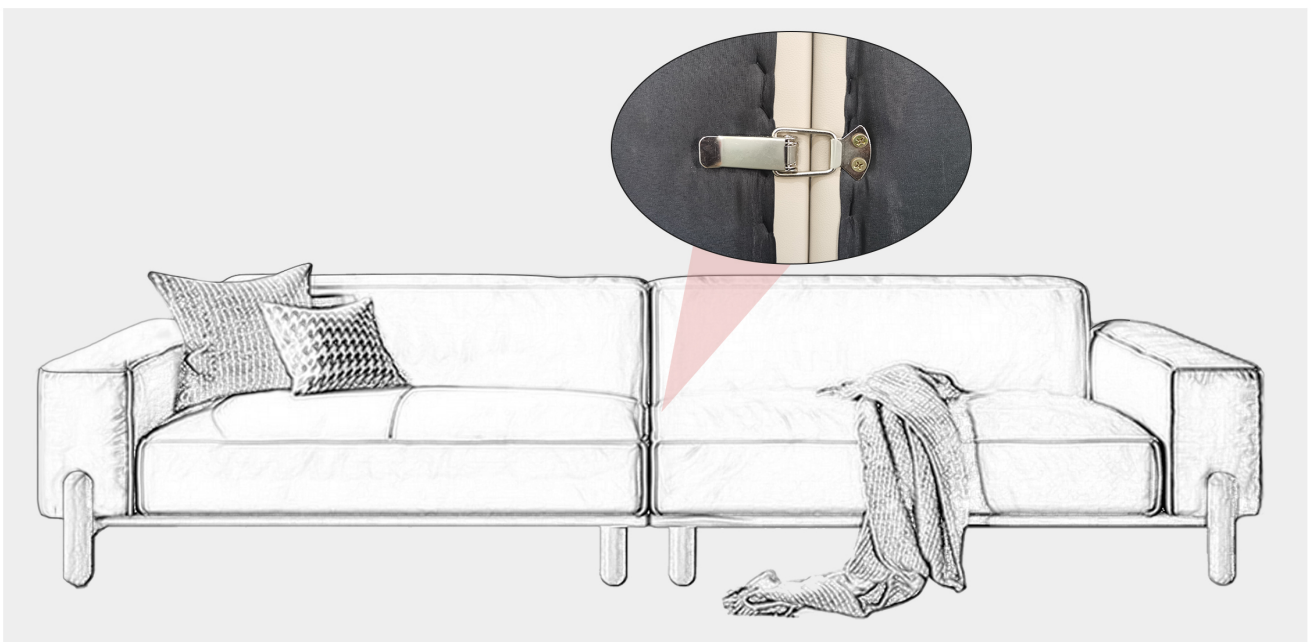

Finally, gently lay the overturned sofa flat, taking care to damage the floor.