

36" PROFESSIONAL OUTDOOR RANGE HOOD

36" STAINLESS STEEL — ONE SKU, ONE WIDTH

**INDUCTION
HARDWARE**


SPECIFICATIONS

SKU	RH-OUTDR-36
Finish	Stainless Steel
Mount	Outdoor wall · pyramid canopy
Overall W × D × H	36 × 30 × 34 in
Maximum airflow	1,500 CFM
Blower motor	2 × brushless DC
Duct	Ø 9.8 in collar for 10 in duct · top discharge
Filters	Dishwasher-safe baffle
Lighting	2 × 3 W LED · 200 lm · 3000/4000/6000 K
Controls	Two knobs · airflow 1–10, light 1–10
Electrical	120 V · 60 Hz · 6.7 A · NEMA 5-15P, GFCI
Rated power	800 W
Minimum height above surface	30 in
Product weight	60 lb
Packaged weight	90 lb
Package W × D × H	40 × 34 × 40 in
Certification	ETL · outdoor approved

OVERVIEW

Outdoor-rated ventilation sized to the BIG-36 induction griddle — corrosion-resistant 304 stainless, twin brushless DC blowers and weather-sealed knob controls. Never narrower than the surface it serves.

KEY FEATURES

- Twin brushless DC blowers · 1,500 CFM
- Corrosion-resistant 304 stainless construction
- Dishwasher-safe baffle filters with grease cup
- Two knobs — airflow 1–10, light 1–10, ring-light feedback
- Temperature sensing steps the fan to setting 9 above 160°F
- Fingerprint resistant · ETL listed, outdoor approved


Installation — Covered installation is required: a roof with at least 3 ft of coverage on the front and sides, protecting the hood from direct rain and sprinklers. All ductwork and roof openings must be sealed against water ingress. Two installers for the 60 lb overhead lift.

36" PROFESSIONAL OUTDOOR RANGE HOOD

DIMENSIONS & DUCTING

INDUCTION
HARDWARE

RH-OUTDR-36 · DIMENSIONS IN INCHES

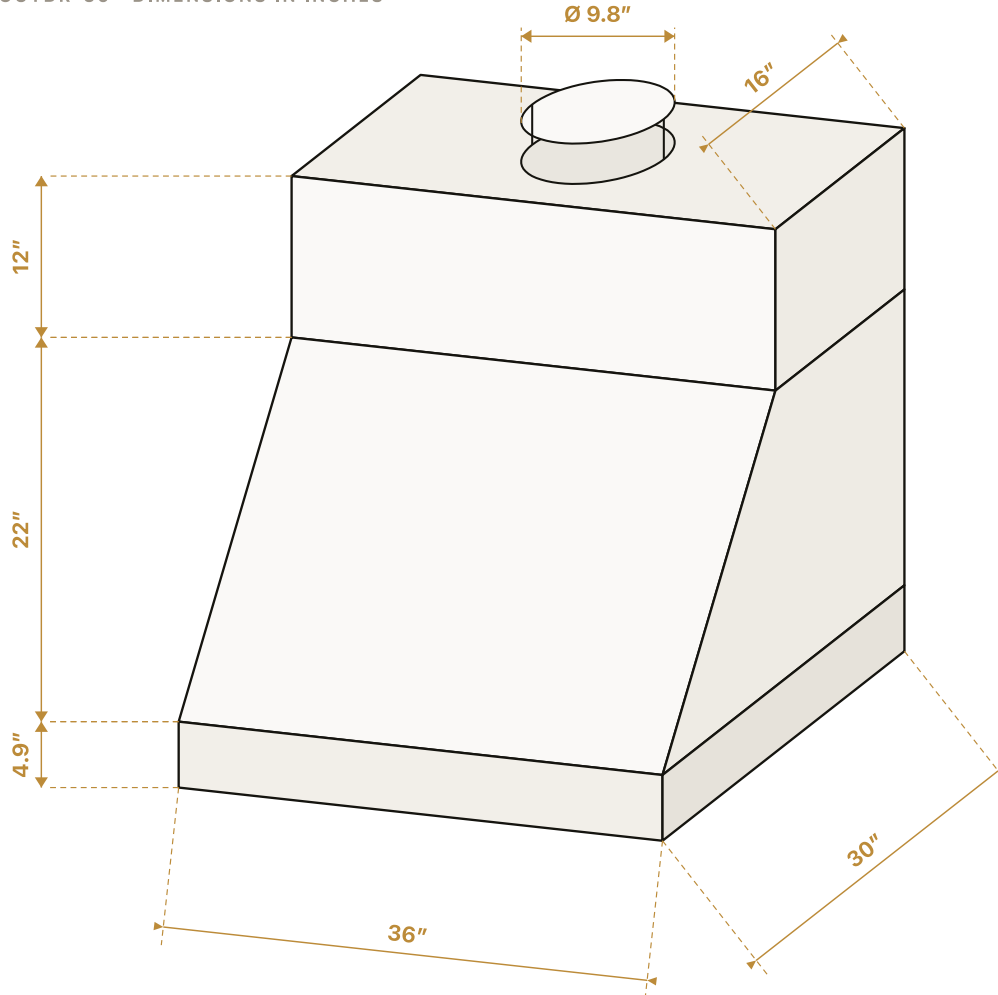

DIMENSIONS IN INCHES · DO NOT SCALE · VERIFY ON SITE BEFORE CUTTING

Overall width	36"
Depth at the filter rim	30"
Depth at the chimney	16"
Canopy height	22"
Chimney section	12"
Filter box	4.9"
Duct collar	Ø 9.8" · top face
Minimum height above surface	30"


ATTENTION INSTALLER

Do not size duct from the indoor Pyramid hood. This hood discharges through a **Ø 9.8 in round collar on the top face** — run 10 in rigid duct, as short and straight as the site allows, terminated with a weather cap and damper.

Rough-in. 120 V GFCI-protected outlet, positioned dry and reachable behind or above the canopy and clear of the canopy footprint. Fix to solid masonry or a framed wall rated for 60 lb plus duct load, using exterior-grade fasteners.

36" PROFESSIONAL OUTDOOR RANGE HOOD

CONTROLS & OPERATION

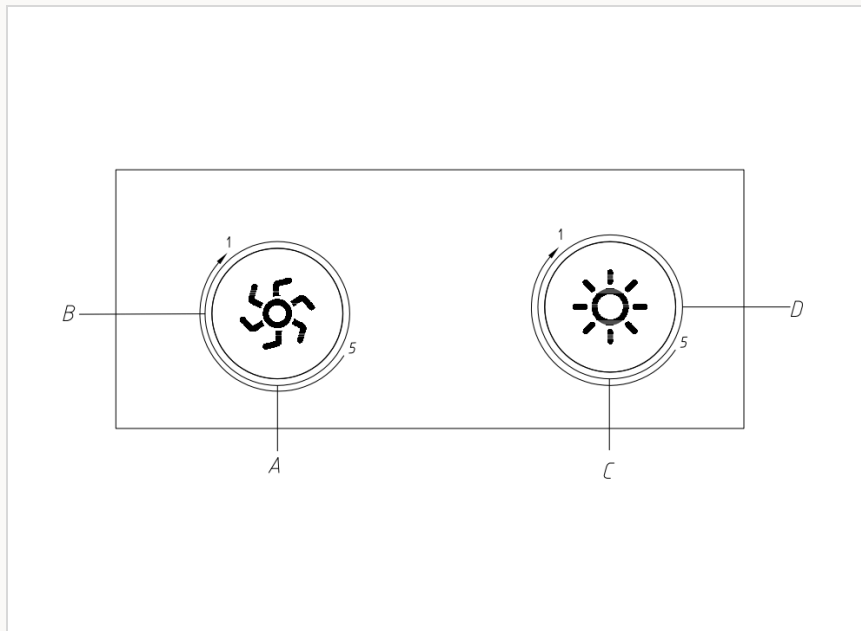INDUCTION
HARDWARE

TWO KNOBS, TEN SETTINGS EACH

Airflow is set by rotation angle, 1 to 10; the ring light around each knob brightens with the setting. The lighting knob runs 1 to 10, and holding it past zero for three seconds cycles cool white, neutral white and warm white.

Temperature sensing. In standby, above 160°F the hood starts itself at airflow 9 and holds it until the surface falls below 130°F. Setting the knob to a speed overrides the sensor; returning it to zero restores automatic control.

1,500 CFM, two blowers

Twin brushless DC motors move the air an outdoor kitchen needs without an AC motor's draw or noise.

Built for weather

Corrosion-resistant 304 stainless throughout, fingerprint resistant, ETL listed and approved for outdoor use.

Baffle filtration

Dishwasher-safe stainless baffles with a grease cup — no mesh to clog, no cartridge to buy.

Matched to the griddle

Sized to the BIG-36 induction griddle and outdoor cooktops of the same width — never narrower than the surface it serves.

LED work lighting

2 × 3 W, 200 lm, CRI above 80, ten brightness levels and three color temperatures.

Lifetime parts warranty

Parts covered for the life of the appliance, backed by the Restore & Renew refurbishment program.