



Camerton™ | K-12867

25" wall-mount blow-out service sink

Features

- Deep squared basin
- 21-1/2" x 25" (546 - 635 mm)
- Blow-out action flushing rim
- 1-1/2" (38 mm) top spud
- Sink requires 5 - 7 gpf (19 - 27 lpf) valve, and minimum running pressure of 25 psi (172 kPa)
- No faucet holes; requires wall-mount faucet
- Sink drain with strainer sold separately



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

0 White



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-10-2026 15:00 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.19.2/CSA B45.1

Technical Information

Basin Configuration:	Single Bowl
Basin Length:	18" (457 mm)
Basin Width:	18" (457 mm)
Basin Depth:	13-1/2" (343 mm)

Material

- Vitreous china
-

Recommended Products/Accessories

K-8935 Stainless steel rim guard for front rim installation on Camerton™ sink, 11"

K-23726 Drain treatment

K-13864 Loose sink strainer


K-23725 Cast iron cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



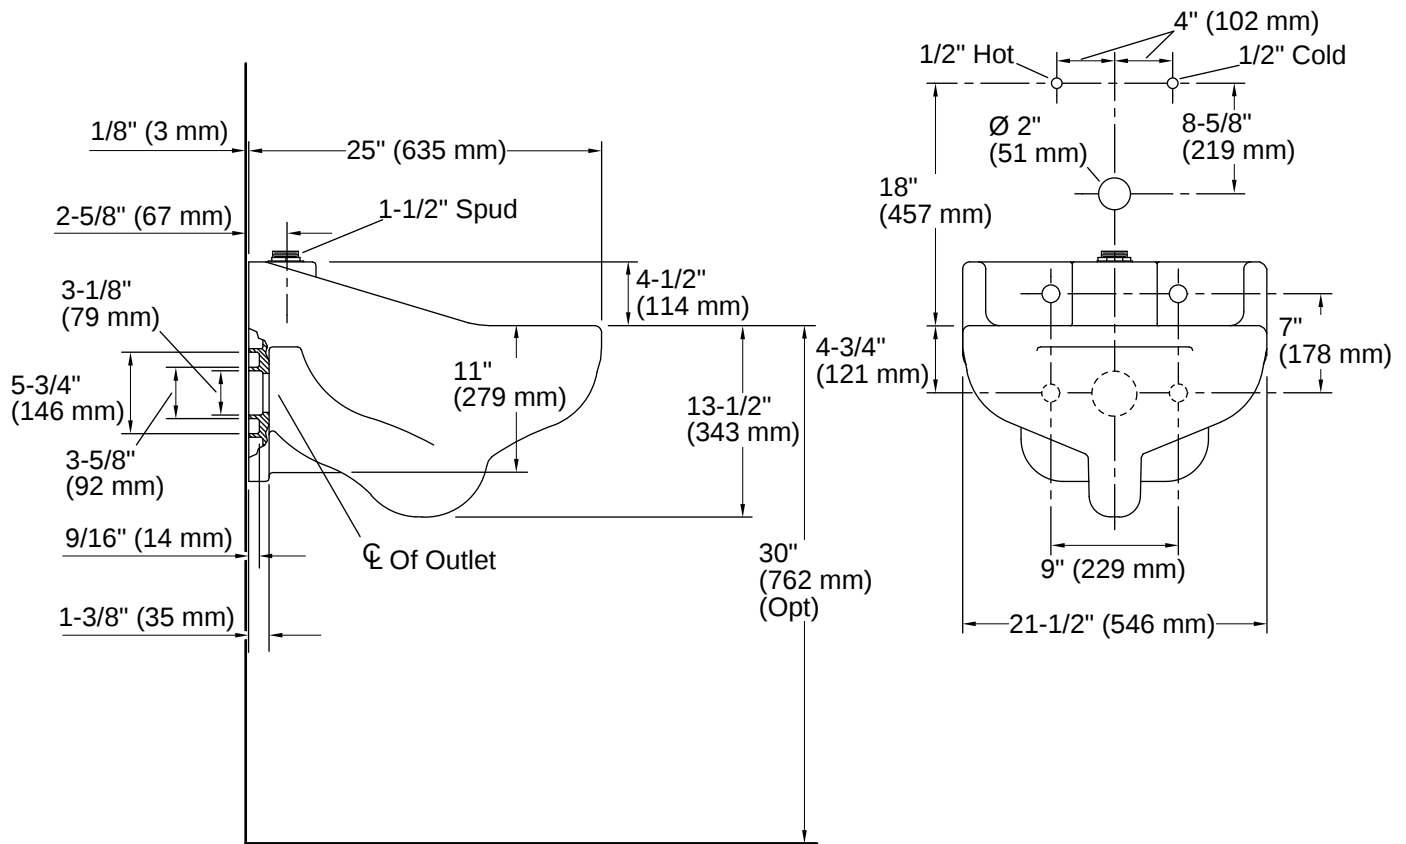

Installation

- Wall-mount

Installation Notes

Install this product according to the installation instructions.

Minimum flowing pressure required: 25 psi (172.4 kPa)

Minimum flow rate required: 25 gpm (94.6 lpm)

Product dimensions are nominal and may vary per ASME

A112.19.2 tolerances.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

8-10-2026 15:00 - US-CA

THE BOLD LOOK
OF **KOHLER**®