


2-DOOR FLIP BUCKET SHOE RACK

INSTALLATION INSTRUCTIONS AND PROCEDURES



PLEASE WEAR PROTECTIVE GLOVES BEFORE ASSEMBLING

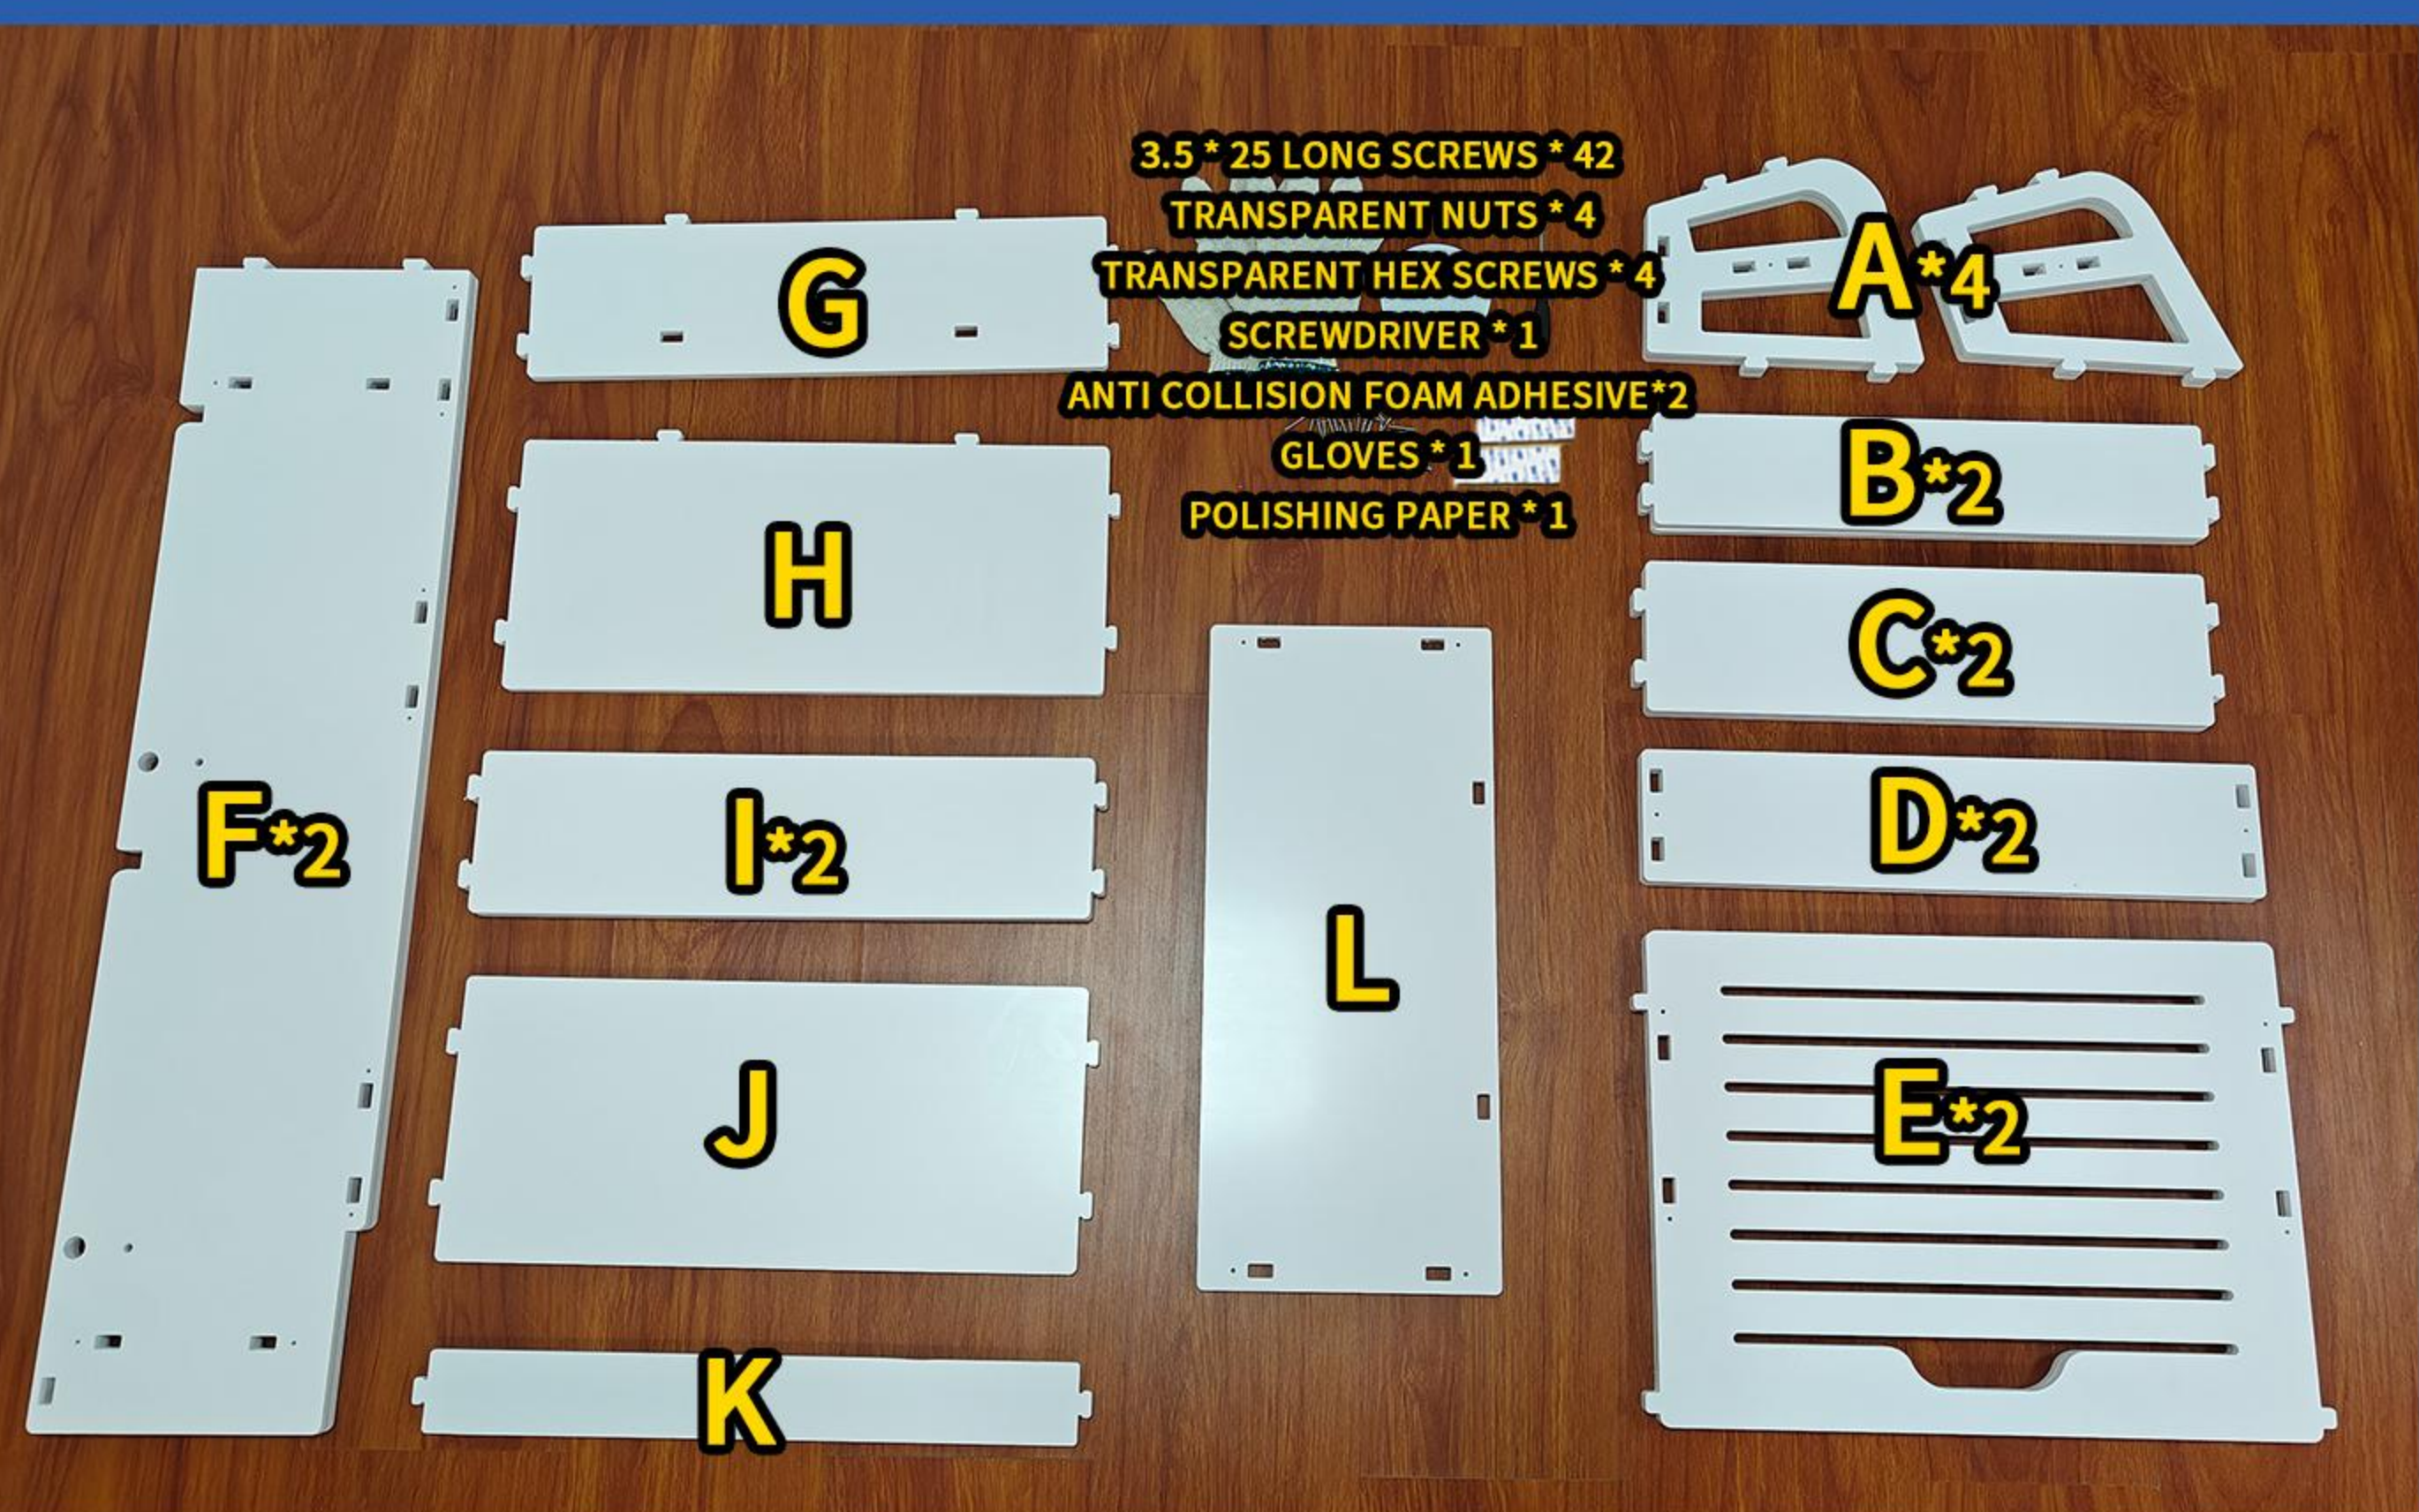


1.ASSEMBLE BOARD B INTO THE MIDDLE OF BOARD A



2.ASSEMBLE C BOARD



3.ASSEMBLE THE SECOND A-BOARD

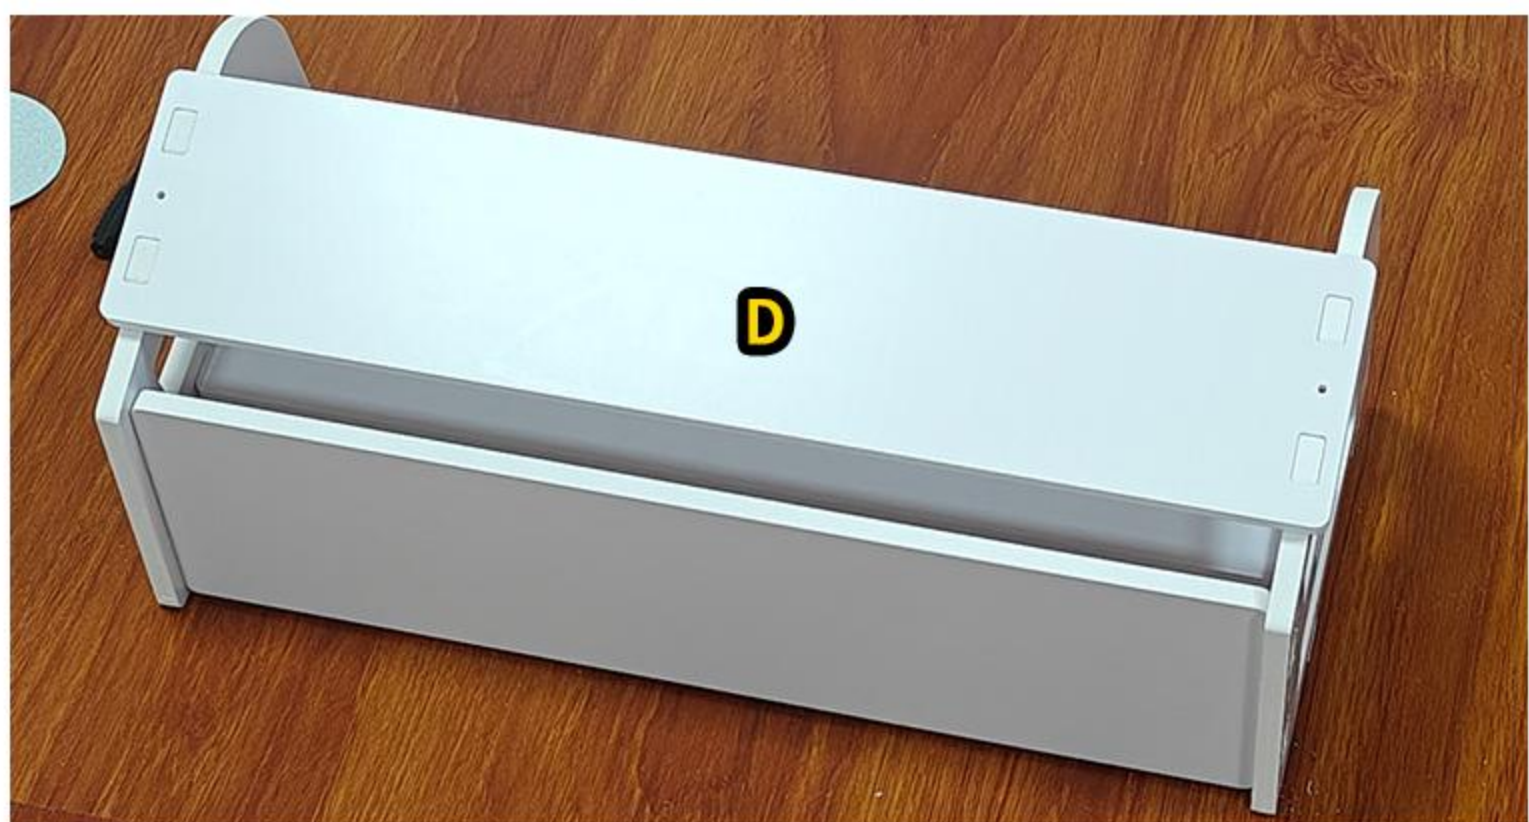

4.ASSEMBLE THE NARROW SURFACE OF BOARD A ONTO BOARD D



5.ASSEMBLE THE E-BOARD

REPEAT STEPS 1-5 TO
ASSEMBLE TWO GROUPS




6.TIGHTEN TWO LONG SCREWS ON BOARD D



7.TIGHTEN TWO LONG SCREWS ON BOARD A



8.TIGHTEN THE TWO LONG SCREWS ON THE OTHER SIDE A BOARD

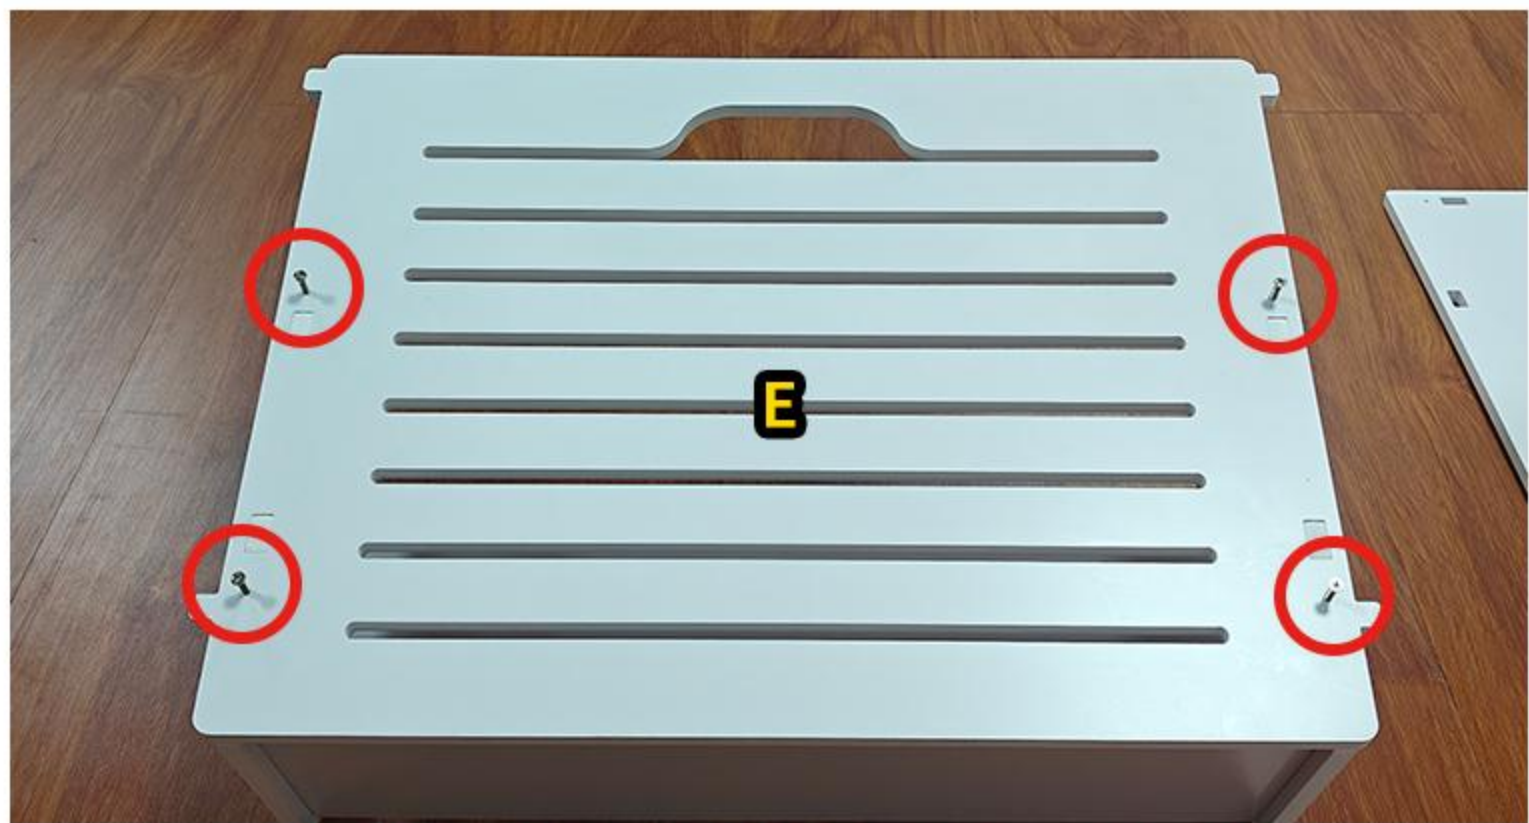

9.TIGHTEN THE FOUR LONG SCREWS ON BOARD E



3.5 * 25 LONG SCREW DIAGRAM



REPEAT STEPS 6-9 TO
SECURE TWO SETS
OF SCREWS

2-DOOR FLIP BUCKET SHOE RACK

INSTALLATION INSTRUCTIONS AND PROCEDURES



10.TIGHTEN THE TRANSPARENT SCREWS AND TRANSPARENT NUTS INTO TWO F-PLATES

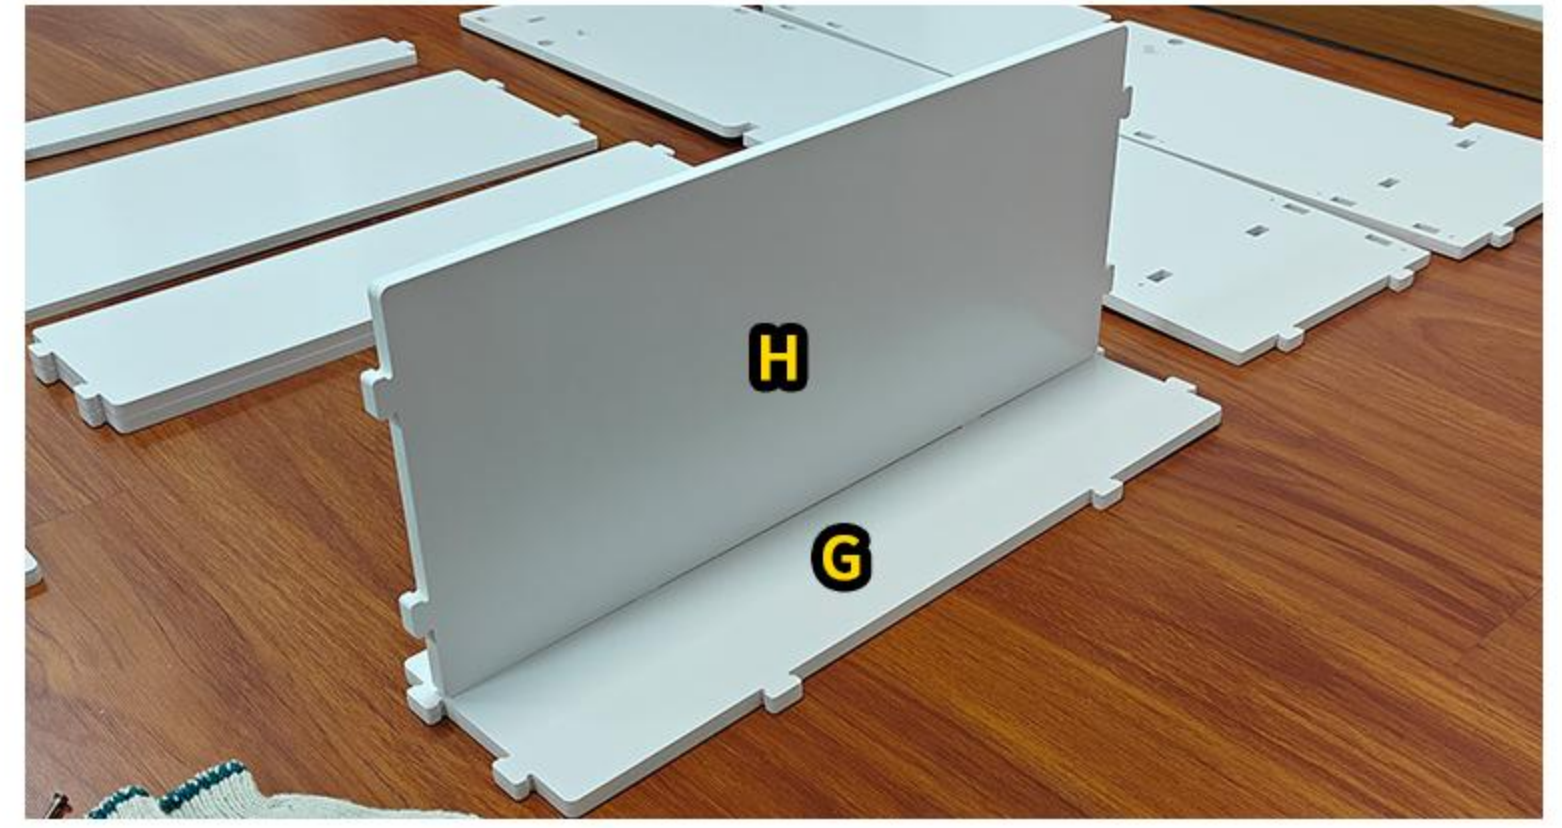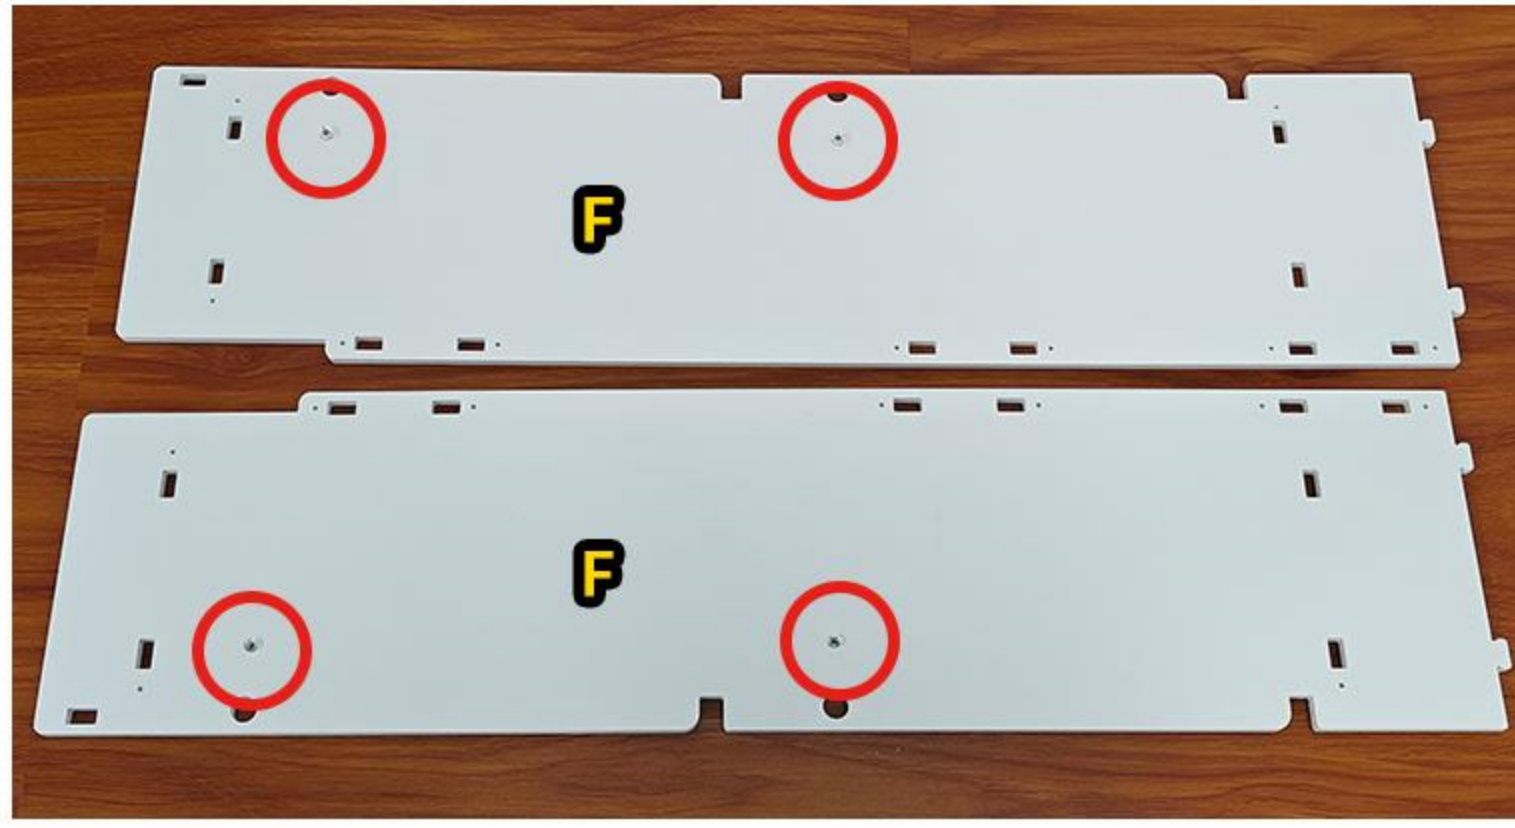


11.COMBINE THE G-BOARD AND H-BOARD TOGETHER



12.THE G+H BOARD IS ASSEMBLED ON TOP OF THE F BOARD



13.ASSEMBLE THE FIRST I-BOARD

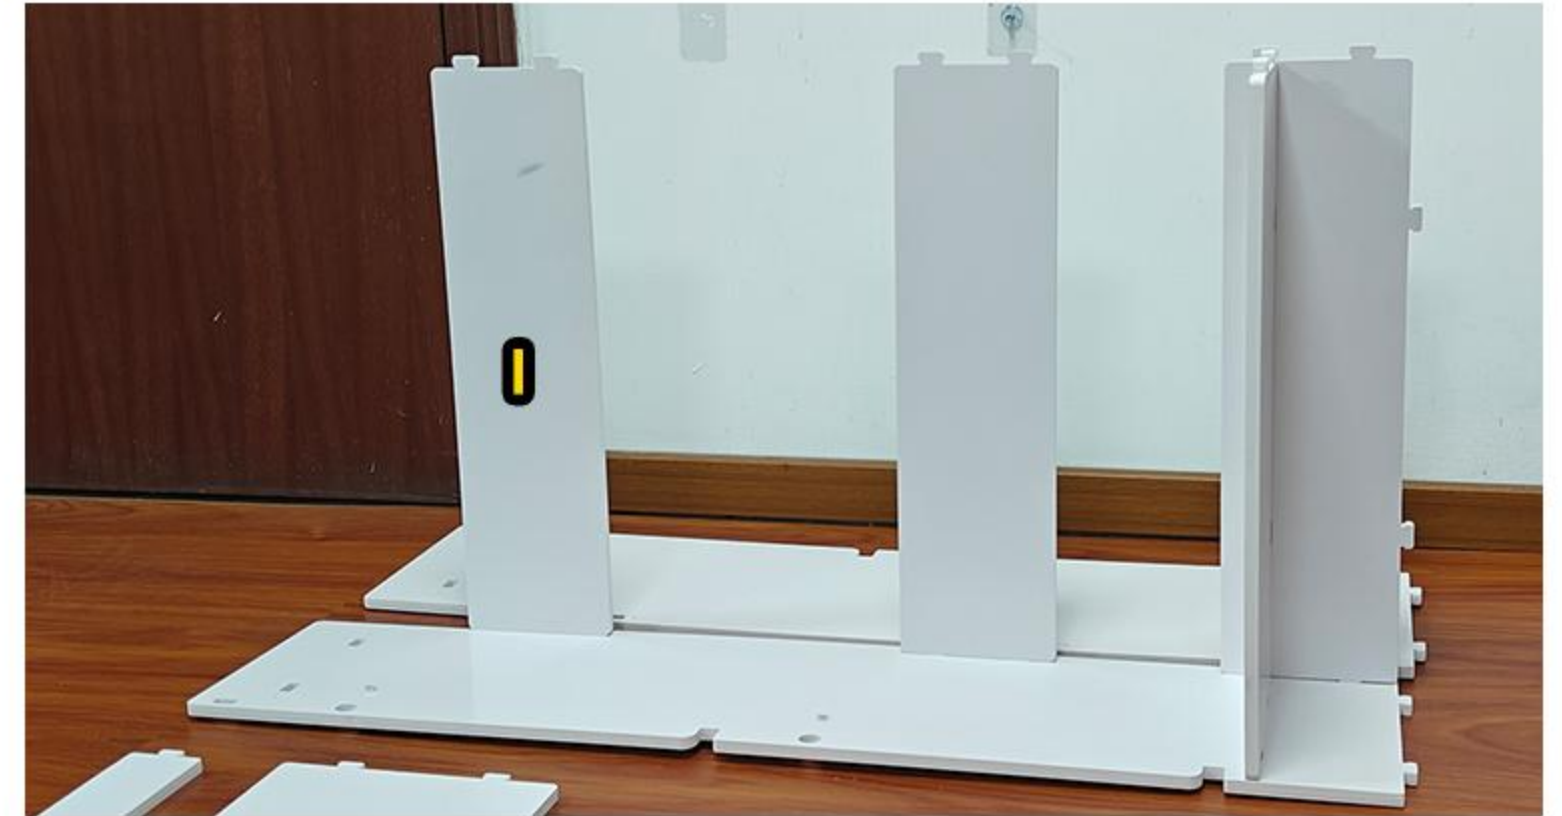

14.ASSEMBLE THE SECOND I-BLOCK



15.ASSEMBLE THE J-PLATE



16.ASSEMBLE THE K-PLATE



17.INSTALL FLIP DOOR 1 AND FLIP DOOR 2 SEPARATELY




18.ASSEMBLE THE SECOND F-PLATE; THERE ARE MANY MORTISE AND TENON HOLES, IT IS RECOMMENDED TO ALIGN ONE SIDE OF THE HOLE AND ASSEMBLE IT BEFORE ASSEMBLING THE OTHER SIDE




19.ASSEMBLE THE L-PLATE



20.TIGHTEN FOUR LONG SCREWS IN THE L-SHAPED BOARD

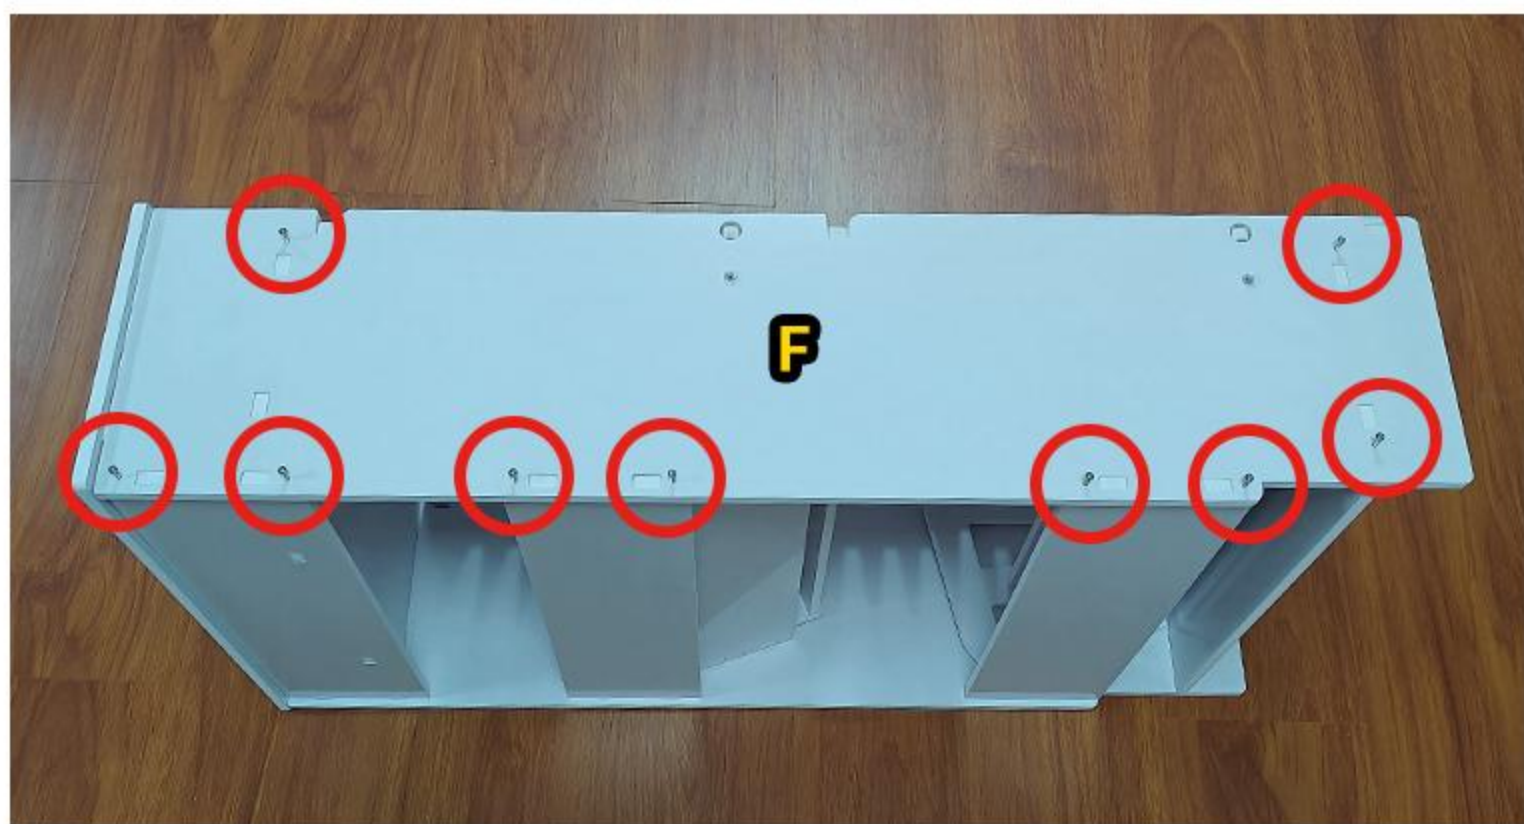

21.INSTALL NINE LONG SCREWS ON EACH OF THE TWO F-PLATES; WE NEED A TOTAL OF EIGHTEEN PIECES

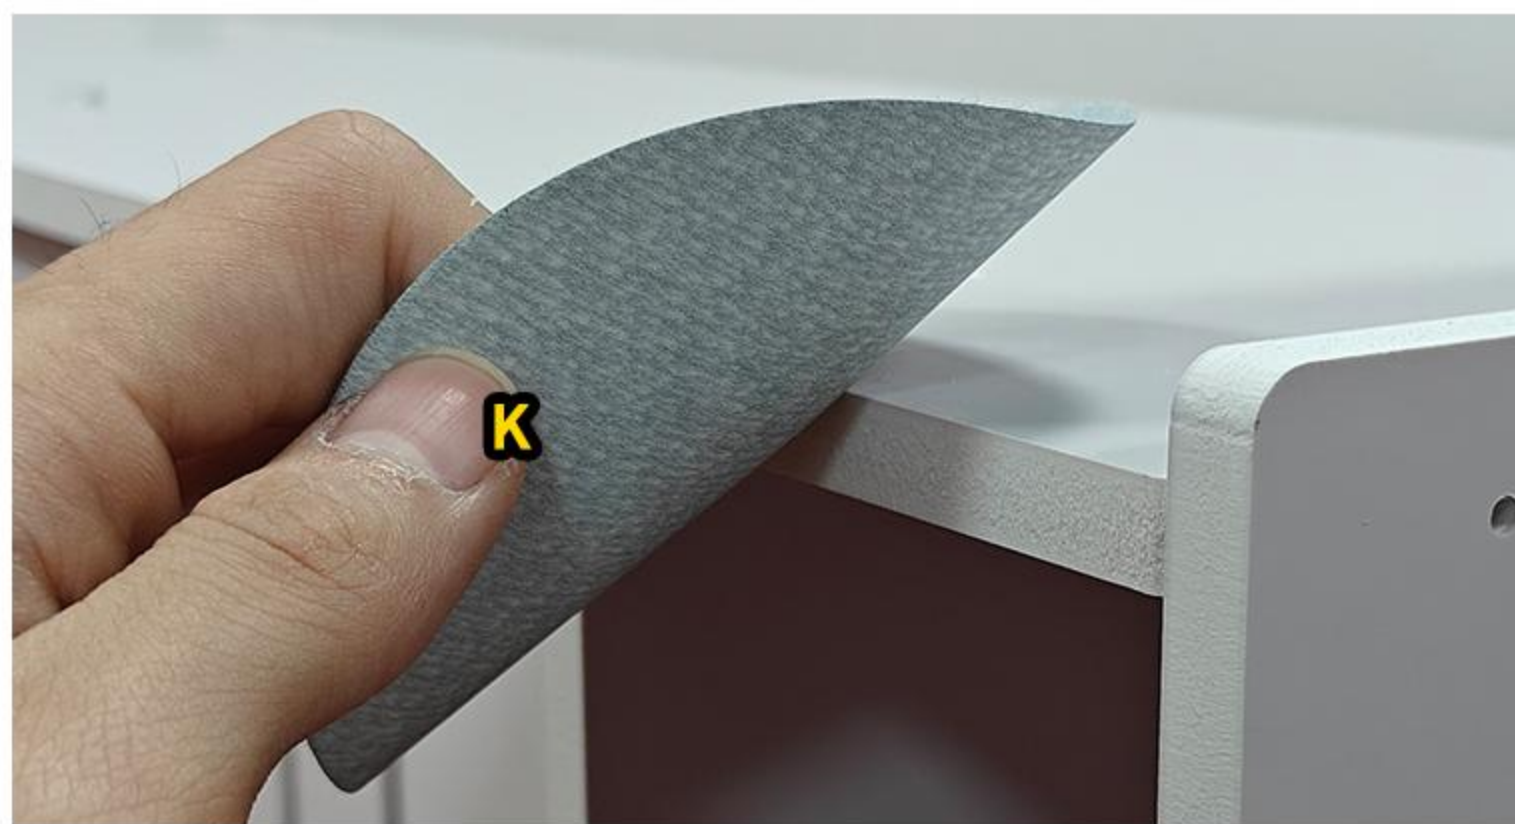

THE PLATE HAS BEEN POLISHED BEFORE LEAVING THE FACTORY; ACCORDING TO THE REQUIREMENTS, THE EDGES CAN BE SELECTIVELY POLISHED, WHICH CAN BE IGNORED



STICK ANTI-COLLISION FOAM ADHESIVE ON THE BACK

INSTALLATION SCHEMATIC

CONNECTION SCHEMATIC

