



Cimarron® Comfort Height® Toilet K-3828-RA

Features

- 29-5/16" x 18-15/16" x 28-13/16"
- Large 3-1/4" canister flush valve features a powerful jet action, providing rapid water delivery from tank to bowl.
- High-efficiency system offers bulk flushing performance and best-in-class cleanliness
- Significant water savings of as much as 16,500 gallons of water annually over a 3.5 gallon toilet
- Meets strict flushing performance guidelines established by the EPA's WaterSense program
- Qualifies as an HET (High-Efficiency Toilet). Consumer rebates are available in some municipalities
- This product can help a building earn Water Efficiency points in the LEED Green Building Rating System
- 12" rough-in supply line not included
- Right-hand lever

Recommended Accessories

K-7637 Angle Supply with Stop (single)

Optional Accessories

K-4650 Toilet Seat

K-4732 Toilet Seat

K-9466-R Right-hand Trip Lever

Components

Product includes:

K-4008 Toilet Seat

Additional included component/s: Tank cover, Trip lever, Toilet seat, Tank accessory pack, and Bolt cap accessory.



ADA

CSA B651

OBC

Codes/Standards

ASME A112.19.2/CSA B45.1

EPA WaterSense®

ADA

ICC/ANSI A117.1

CSA B651

OBC




KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	0	White
	96	Biscuit
	47	Almond

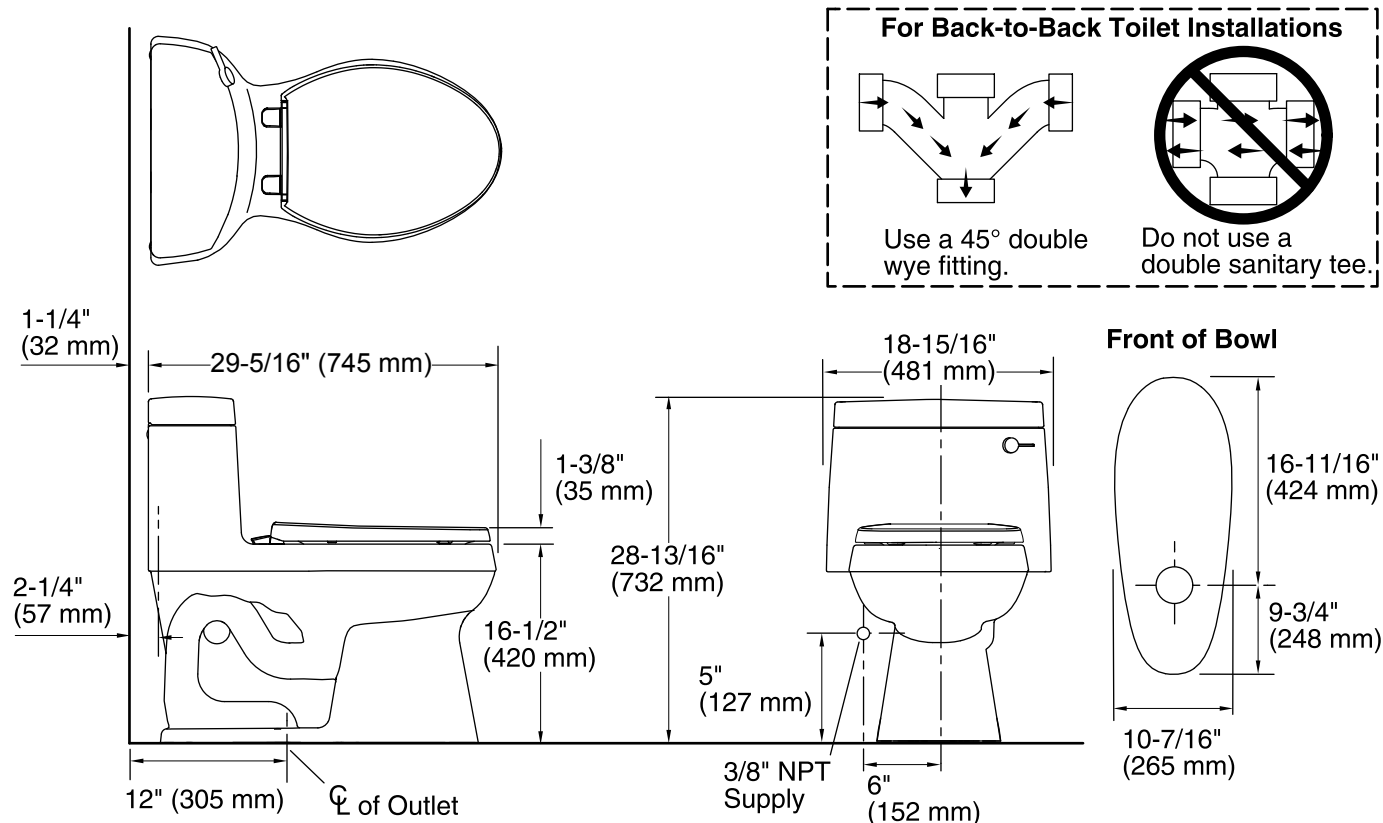

Technical Information

All product dimensions are nominal.

Toilet type:	One-piece
Bowl shape:	Elongated front
Flush type:	Other
Seat hinge type:	Quick-Attach®, Quiet-Close™, Quick-Release™
Trap passageway:	2-1/8" (54 mm)
Water surface size:	11-3/4" x 8" (298 mm x 203 mm)
Rim to water surface:	6-1/8" (156 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)

Notes

Install this product according to the installation guide.

For back-to-back toilet installations: Use only a 45° double wye fitting.

K-4650 is the recommended toilet seat for public use accessible installations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.