


1. Check all accessories



2. Find the 6 openings on the lamp body and install the logo in the picture for placement.

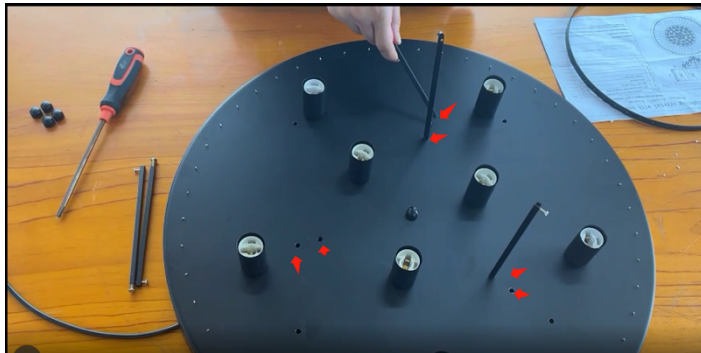

3. Align the port and install the screws

(The screws on the chassis can be tightened, but the screws on the frame do not need to be tightened all at once. They can be tightened later with appropriate adjustments.)



4. Initial framework formation



5. Tighten the screws



6. Install crystal strips.

