operating instruction

Electric towel rack

display screen

About the manual composition

catalogue

Installation Notes 2
Installation method 4
Control module 13
Precautions for use 14
Specifications 16

Thank you for choosing this bathroom electric heating towel rack.

Please read this instruction carefully before installing, using and maintaining the electric towel rack product.

Before installation, be sure to read Installation Notes (pages 2-3). Failure to follow this instruction may cause personnel injury or property damage.

After the installation, show the customer how to use and maintain the product, And give this instructions to the customer for safekeeping.

Before use, please read the Use and Maintenance Notes (pages 14-15). Please keep this specification properly for future reference.(Reserve)

2 Safety guidelines

Please note this note

If the following instructions are ignored, death, serious personal injury, or property damage may occur due to improper operation of the equipment

■ The following identification indicate to of hazards or injuries resulting from incorrect operations

warn	This is what can cause death or serious injury.
pay attention to	This is what may cause personal injury.

■ Please note to where is identified in the following graphics

Such an operation is prohibited.	The contents of the operation must be followed.

Installation considerations

For the installer to read it

! warn

■Must be grounded
(Otherwise, an electric shock may be caused when a fault or electricity leakage occurs)

■The power supply must be disconnected during installation and maintenance
(Otherwise, it may cause an electric shock.)

■Make sure that the power cord is installed in place
(Otherwise, it may cause a fire.)

■Must be installed by a professionalperson, and must be install the product firmly
(Otherwise the product may fall, causing injury)

■During installation, a "power full pole switch" of no less than 3mm² (12AWG) must be installed in the power supply line to turn on or off the host power supply, with its rated load capacity of no less than 115V ~ 15A, and installed in a convenient operation place outside the bathroom
(Otherwise, short circuit and fire)

■Select the 60227 IEC53 stranded flexible cord as specified in GB / T 5023.5. The cross-section area of the wire is 3×2.5mm² (13AWG)
(Otherwise, it may cause a fire.)

■The product must be installed at position where the people in the bathtub or in the shower area can not touch
(Otherwise, it may cause an electric shock.)

■Gas must be avoided from the open airway or other open flame equipment
(Otherwise, it may cause a fire.)

■To avoid the failure of the heat circuit breaker, the product cannot be powered by the external switching device. For example, a timer or a circuit that is periodically switched on and off by a common component
(Otherwise, it may cause a fire.)

3 Installation precautions

For the installer to read it

Product installation

■This product must be used in a power supply with a CCC-compliant electric leakage protection switch (the leakage current is below 30mA)Use under the power supply
(Otherwise, it may cause an electric shock or a fire)

■Appliances shall be installed in accordance with national wiring rules
(Otherwise, it may cause a fire.)

■Do not use a power supply other than the rated voltage (115V ~, 60Hz)
(Otherwise, it will damage the product and cause a fire)

■No proximity to curtains and other combustible
(Otherwise it may ignite combustible)

■Do not install the product at the same line (up/down) of the power sockets
(Otherwise, it may cause a fire.)

■To avoid thermal circuit breaker failure,the product must not be powered by an external switchgear.For example, a timer or circuit that is regularly turned on and closed by a common component
(Otherwise, it may cause a fire.)

■ Do not connect the power supply during installation
(Otherwise, it may cause an electric shock or a fire)

■Installation using methods other than those specified in this instruction manual is prohibited
(Otherwise the product may fall, causing injury)

! pay attention to

Product installation

■Please perform the product installation work
(Otherwise the product may fall, causing injury)

■Product installation must be firm
(Otherwise the product may fall, causing injury)

■When installing special parts such as hardware, special parts shall be used
(Otherwise the product may fall, causing injury)

■After installation, the distance from the product to the ground must be greater than 0.8meter
(Keep away from children touching)

■Transformation of the product isprohibited
(Otherwise, it may cause damage or injury to the product)

4 method of erection

For the installer to read it

! warn

power line

■ Power cord, please according to the embedded incoming wire and control line, whether intact and complete, whether connected to the distribution box

■ The insulation outer surface glue of the power cord and the control wire should not be damaged, otherwise it may cause electric leakage and electric shock danger

1. Prepare to install a towel rack.

towel rack

Accessories table

component		quantity
screw		4
wall anchor		4

5 method of erection

For the installer to read it

Open line installation



◀Position 1:1 position the wallpaper to the wall

Find the corresponding hole position,according to the marked model, the same color is a group. ▶

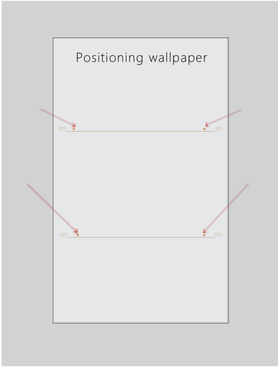

6 method of erection

For the installer to read it

Open line installation



◀ Use 6mm drill bit

Put the wall anchors into the drilled 6mm hole, and hammer into the hole completely, then tear off the positioning wallpaper. ▶



7 method of erection

For the installer to read it

Open line installation

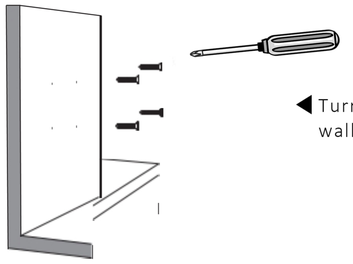

◀ Turn the screws into the wall anchors

Please reserve about 5mm and do not tighten the screws. ▶



8 method of erection

For the installer to read it

Open line installation

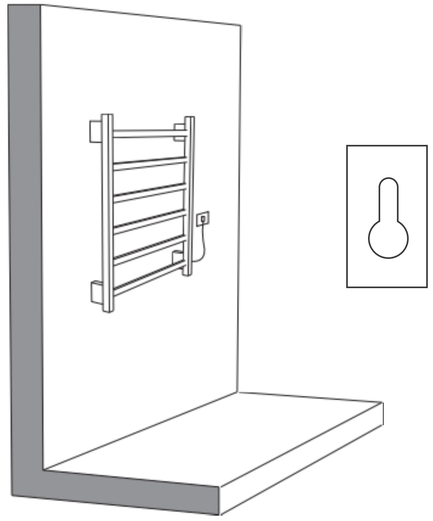

▲

Hang the towel rack into the four reserved screw positions, pull down to clamp and plug in to complete the installation

9 method of erection (For the installer to read it)

Dark line installation

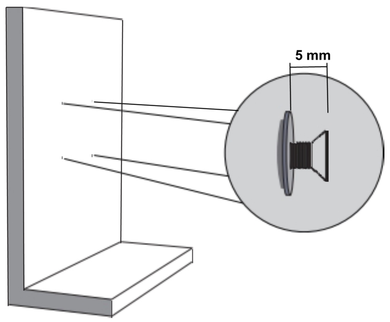

▲

Follow the open line installation page 5-7 to complete the upper drawing step

10 method of erection (For the installer to read it)

Dark line installation

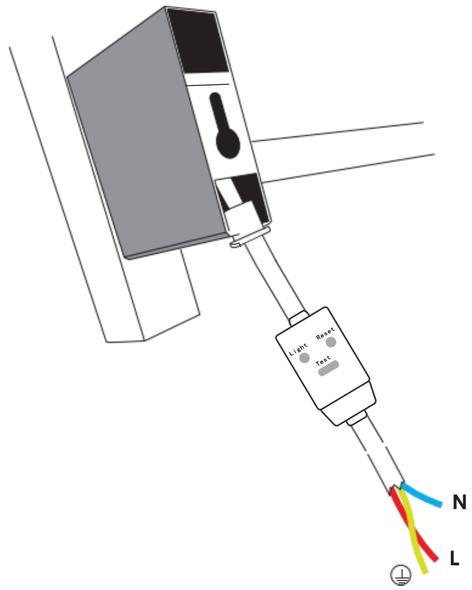

▲

Cut the towel rack power cord, separate zero wire (N) and fire wire (L) 、ground wire⏚

11 method of erection (For the installer to read it)

Dark line installation

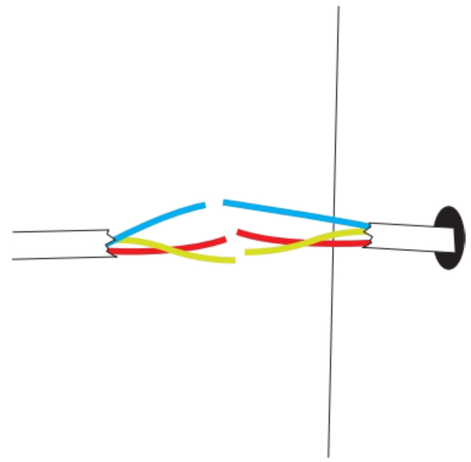

▲

towel rack zero line (N), fire wire (L), ground wire⏚Connect with the embedded wires in the walls

12 method of erection (For the installer to read it)

Dark line installation

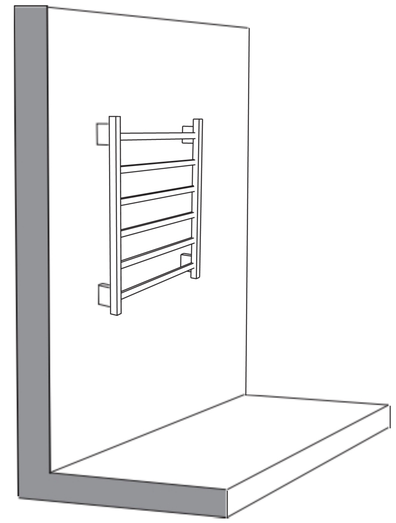

▲

Hang the towel rack into the four reserved screw positions, pull them down to the clamp, and complete the installation

13 First use (For the installer to read it)

■After installation, connect the power supply, press each function button on the switch, and check the following items.

1. Is the product heating normal
2. Whether there is abnormal noise or odor
3. Whether the buttons on the controller module are normal, and whether the LCD display is normal

control module

function Introduction

Temperature / time Alternate display

body heat regulation (45°C - 70°C)

Power on / off (long press)
Timed heating (pointpress) (1h - 8 h)

14 Precautions for use (For reading by the users)

⚠ warn

To avoid a fire or an electric shock

power line

■Do not use an unrelated power cord
(Fire due to heat not a specified voltage)

■Do not use the damaged power cord
(If the power cord is found, it must be replaced by the designated maintenance point, do not without permission)

■Do not pull off the power plug by pulling the power cord

■Do not pull the power cord

■Do not tie or tie the power cord

■Do not distort the power cord to cause excessive bending and deformation

■Do not press the power cord with heavy objects

When using

■If an abnormality or fault occurs, please stop using it immediately and unplug the power cord / power plug
(If the product hears abnormal noise, sees smoke, or When feeling overheating and smelling odor, please remove the power cord / power plug immediately and contact the service center)

■Do not place medicine or chemicals on the shelf
(Dumping of chemicals can cause short circuit and fire)

■Do not use combustible sprayers near electric towel racks

Attaching plug

■Do not plug in the power supply with your wet hands
(Wet hands can cause an electric shock)

■Verify that the power plug is completely plugged in
(Not inserted to the end, for example, inserted half may cause electric shock, overheat and cause fire)

■Do not connect multiple plugs to one power outlet and use multiple extension lines
(Will make the current exceed the rated power of the row, causing heat, poor contact, deformation, smoke, fire, resulting in fire)

■Please regularly check the power plug / power cord for abnormalities, such as overheating, rust, bending, cracking, etc
(The above abnormality may cause a fire to short circuit the power plug)

■Please clean the power plug using dry cloth
(Poor insulation due to moisture and other reasons)

■Before touching the body and before cleaning the product
(Otherwise, electric shock)

■When not ready to use the product for a long time, please unplug a power plug
(Otherwise, electric shock)

15 Precautions for use (For reading by the users)

When using

■In case of gas leakage, open no function of the product
(May produce a spark and cause an explosion)

■No water or other liquid directly into the product
(short circuit causing electric shock or fire)

■Do not disassemble the product for repair or modification
(Can cause an electric shock or a fire)

⚠ warn

Maintenance process

■Please wipe it with warm water and a soft cleaning towel (or sponge)
(A detergent containing corrosive or bleach is harmful to this product)

■If using chemical rags, please follow the use instructions to clean the product

■When maintaining or repairing the towel rack, first turn off the power or unplug the plug to ensure safety

■Indoor installation and use are only

■Do not use wire brushes or other hard tools to clean for any damage to the product appearance

■In order to avoid product discoloration and accelerated aging, do not use various diluents, alkaline cleaners, benzene, alcohol, fungicides, etc

■Never drop colored towels or underwear on the product surface

■Do not hit the shell

16 specifications

parameter declaration	
Product Model	KD001
Product Size	580*500*70mm
Power Supply	AC 110V
Rated Power	210W
Heating Temperature	45°C ~ 70°C
Drying Time	About ten minutes
Timing Method	Electronic digital type
Power Cable Length	1.5m

kindly reminder

Please be sure to check the electric heating towel rack that you use regularly!



Whether or not, these conditions

* Sometimes it does not start, even with the button
* The body heat is abnormal, or smelly during the product operation.
* Abnormal noise during operation
* Other abnormal faults

When the above situation occurs, please stop using it. In order to prevent faults or accidents, please pull off the power plug from the socket. Be sure to contact the after-sales service for maintenance.