

Features


- Powers up to eight Kohler Insight™ AC touchless faucets
- Designed for portable or permanent installation
- Supplied with 30' (762 mm) power cord for easy 120 V installation
- Rugged ABS construction suitable for conduit installation
- Universal Input for 100 VAC to 240 VAC, 60 Hz operation
- Ultra-low power consumption of 90 mA maximum
- Switching power supply technology
- Meets stringent DOE energy efficiency level V
- Regulated output of 3.5 VDC at 0.87 Amps
- Short circuit and over voltage output protection
- Class 2 electrical isolation

Codes/Standards Applicable

Specified model meets or exceeds the following:

- UL 1310
- CSA – C22.2 No. 223-M91
- FCC 47, Part 15
- EN 55022 EMC Emissions
- IEC 61000 EMC Immunity
- IPX3 Water Ingress
- RoHS
- WEEE

MULTI-OUTPUT POWER SUPPLY K-13481

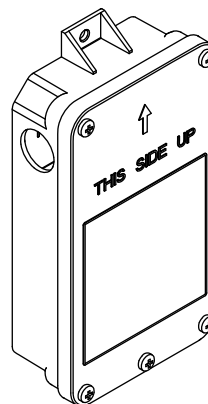

Colors/Finishes

- NA: None applicable

Accessories

- CP: Polished Chrome
- VS: Stainless Steel
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes
K-13481	Multi-output power supply	<input type="checkbox"/> NA
Required Accessories		
K-13487	4' (1.2 m) faucet wire or cable	<input type="checkbox"/> NA
K-13602	6' (1.8 m) faucet wire or cable	<input type="checkbox"/> NA
K-13603	8' (2.4 m) faucet wire or cable	<input type="checkbox"/> NA
K-13604	10' (3 m) faucet wire or cable	<input type="checkbox"/> NA

Product Specification

The power supply shall operate up to eight Kohler Insight™ AC touchless faucets. Product shall be designed for portable or permanent installation. Product shall be supplied with 30' (762 mm) power cord for easy 120 V installation. Product shall have rugged ABS construction suitable for conduit installation. Product shall have switching power supply technology. Product shall be ultra-low power consumption. Power supply shall meet stringent DOE energy efficiency level V. Power supply shall have short circuit and over voltage protection. Product shall provide Class 2 electrical isolation. Product shall have universal input for 100 VAC to 240 VAC, 60 Hz operation. Power supply shall have a regulated output of 3.5 VDC at 0.87 Amps. Power supply shall be Kohler Model K-13481-_____-_____.




Optional Accessories				
K-11842	Square AC control kit	<input type="checkbox"/> NA		
K-11843	Round AC control kit	<input type="checkbox"/> NA		
K-13462	Sculpted touchless AC-powered deck-mount faucet with mixer		<input type="checkbox"/> CP	<input type="checkbox"/> VS
K-13463	Sculpted touchless AC-powered deck-mount faucet		<input type="checkbox"/> CP	<input type="checkbox"/> VS
K-13468	Geometric touchless AC-powered deck-mount faucet with mixer		<input type="checkbox"/> CP	<input type="checkbox"/> VS
K-13469	Geometric touchless AC-powered deck-mount faucet		<input type="checkbox"/> CP	<input type="checkbox"/> VS
K-13474	Gooseneck touchless AC-powered deck-mount faucet with mixer		<input type="checkbox"/> CP	<input type="checkbox"/> VS
K-13475	Gooseneck touchless AC-powered deck-mount faucet		<input type="checkbox"/> CP	<input type="checkbox"/> VS

Technical Information

Input:	100-240 V, 60 Hz, 90 mA
Output:	3.5 VDC, 0.87 A

Installation Notes

Install this product according to the installation guide.
Faucet wires or cables must be ordered to fit installation as needed.
Follow local electrical codes before installation.
Correct orientation required to meet IPX3 water ingress protection.
For use with Kohler Insight™ touchless faucets only.

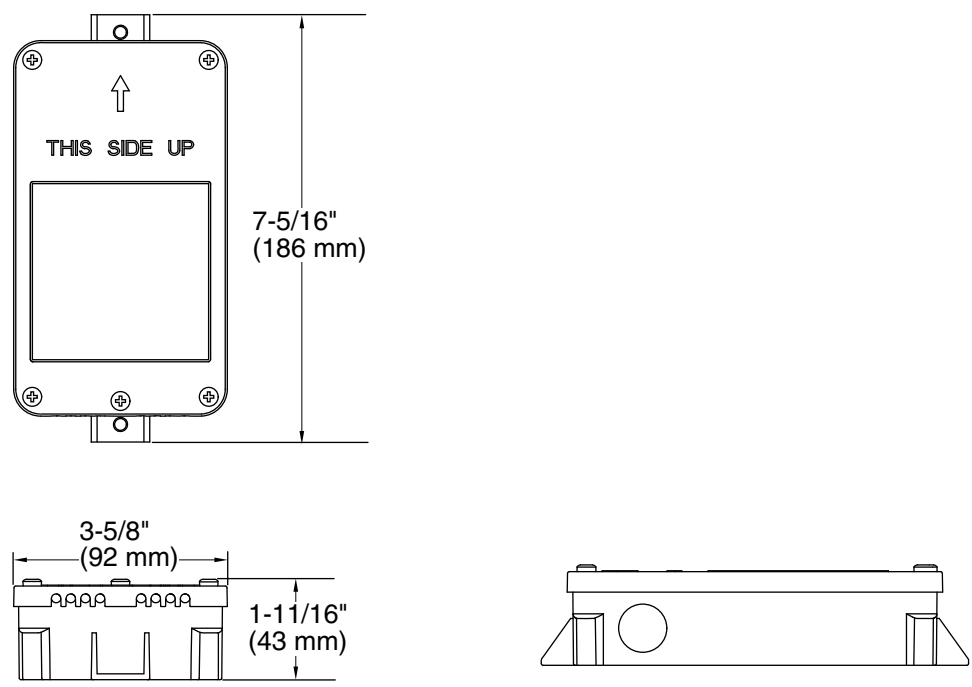

Product Diagram