

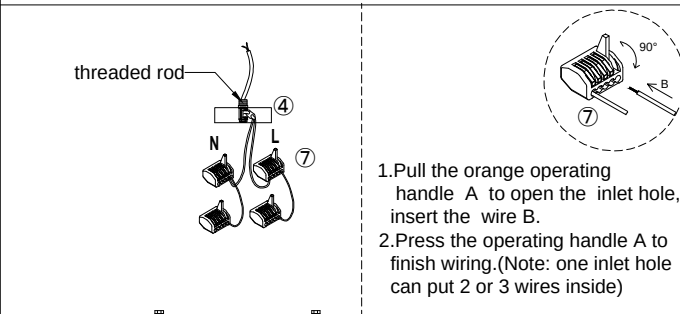
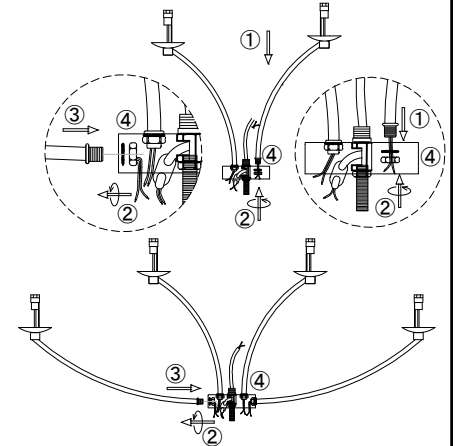

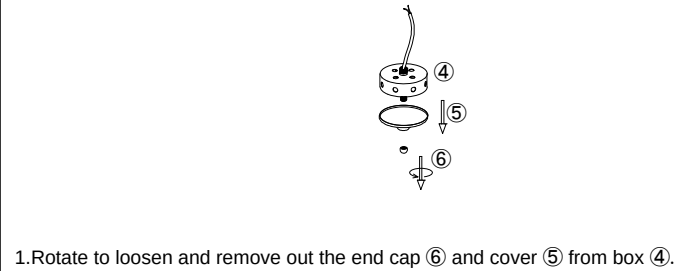


Installation & Assembly

① ②	① light arm 4pcs ② lock nut & teeth lock washer 4pcs	④ ⑤ ⑥	④ connected metal box 1pcs ⑤ cover 1pcs ⑥ end cap 1pcs	⑧	hanging tube 1pcs	⑪ ⑫	⑪ canopy 1pcs ⑫ cap nut 2pcs	⑬	cylinder tube 12pcs	⑭ X 1PCS ⑮ X 1PCS
③	③ light arm 8PCS ② lock nut & teeth lock washer 8pcs	⑦	splicing connector 4pcs	⑨ ⑩	⑨ threaded rod 1pcs ⑩ hanging tube 1pcs	⑬	chain 1pcs	⑭ X 3PCS ⑮ X 3PCS	⑯ X 3PCS ⑰ X 3PCS	


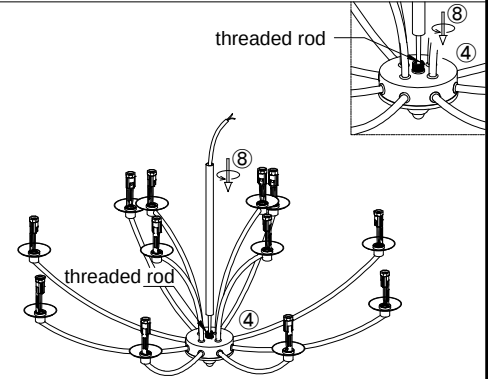


2. Install the light arm ① to the top of box ④ with lock nut & teeth lock washer ②. (don't tighten the nut ② until all light arms are installed to the box, rotate to tighten the nut ② at last)
3. Install the light arm ③ to the side of box ④ with lock nut & teeth lock washer ②, adjust the position of light arm ① and light arm ③ to make it proper.



4. Connect all the wires by parallel with connectors ⑦ (all live line-L use one connector, and neutral Line-N use another connector).
5. Close the bottom cover ⑤ to the metal box ④ with end cap ⑥.

6. Let the wire of the fixture go through the tube ⑧, rotate to install the tube ⑧ to the fixture. (can connect more tubes to get the height you need)

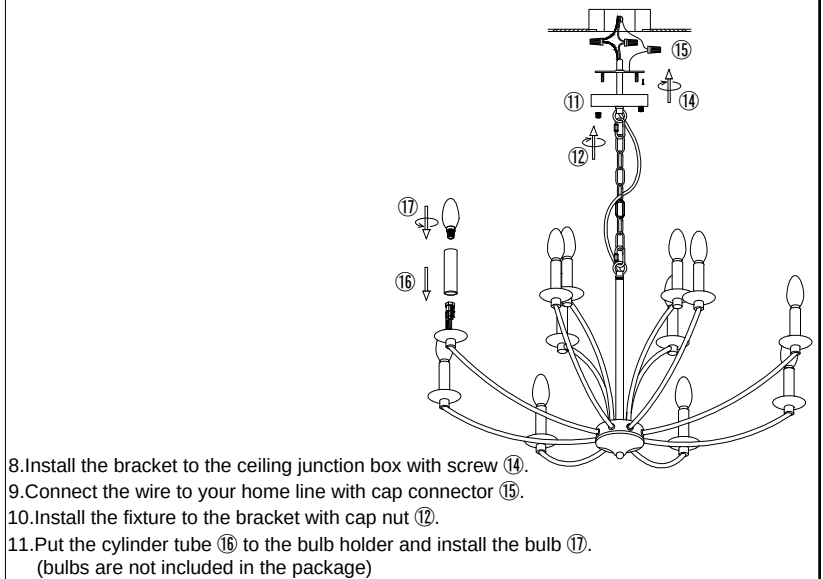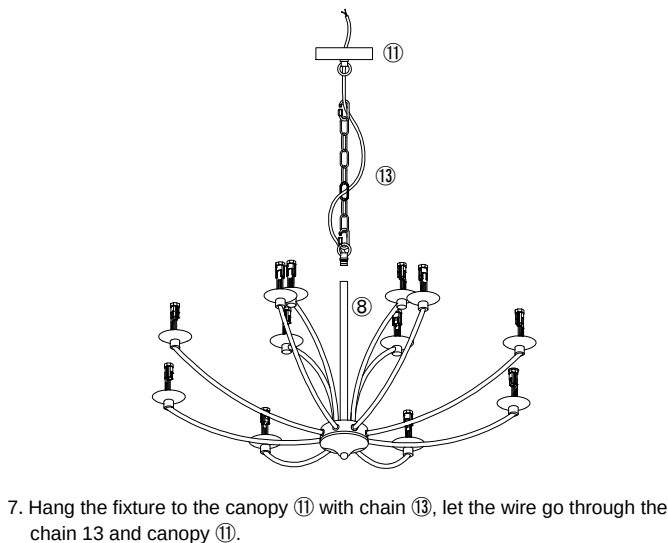

Please read carefully before installation!!!
The purchase link includes an installation video.
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !