

Exos 50


Exos 60

Exos 80

HiB recommend you receive the product before commencing with installation as all sizes and measurements are approximate.
 HiB try and ensure all measurements are as accurate as possible.
 In the interest of continuous product development, HiB reserves the right to alter specification as necessary. E & OE.


Exos 50

Art No. 53500

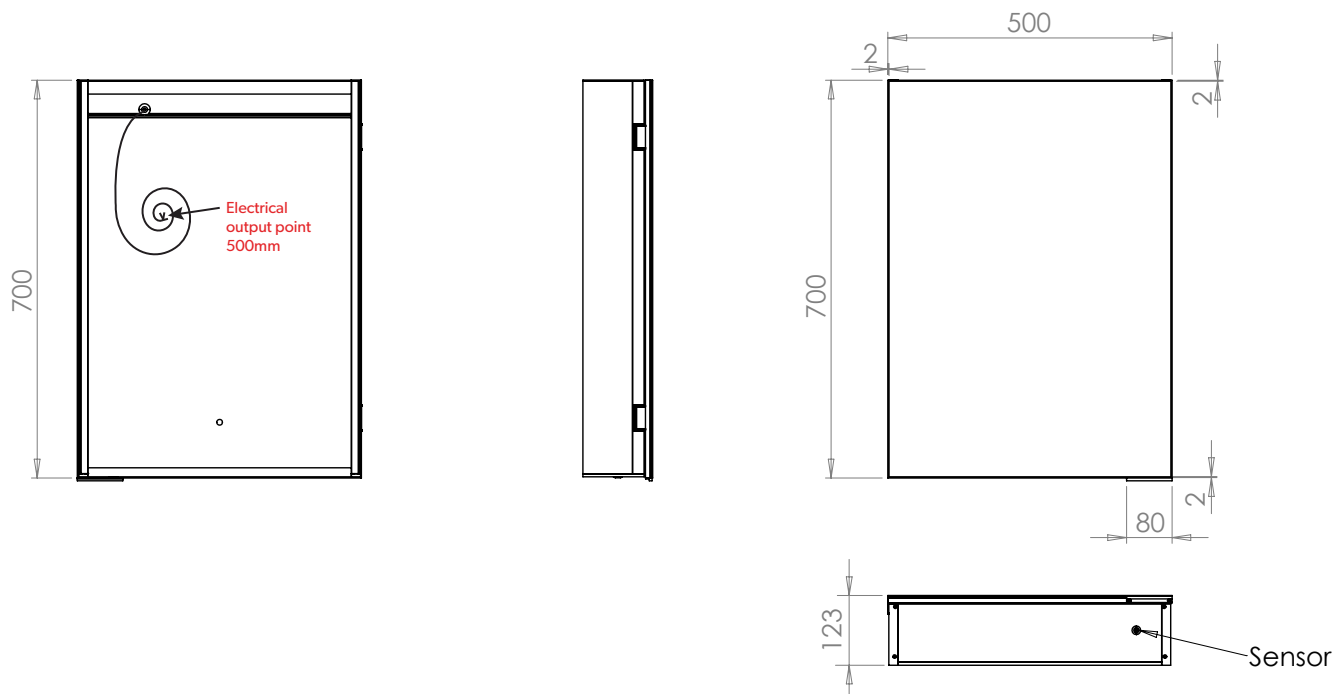

Exos 60

Art No. 53600

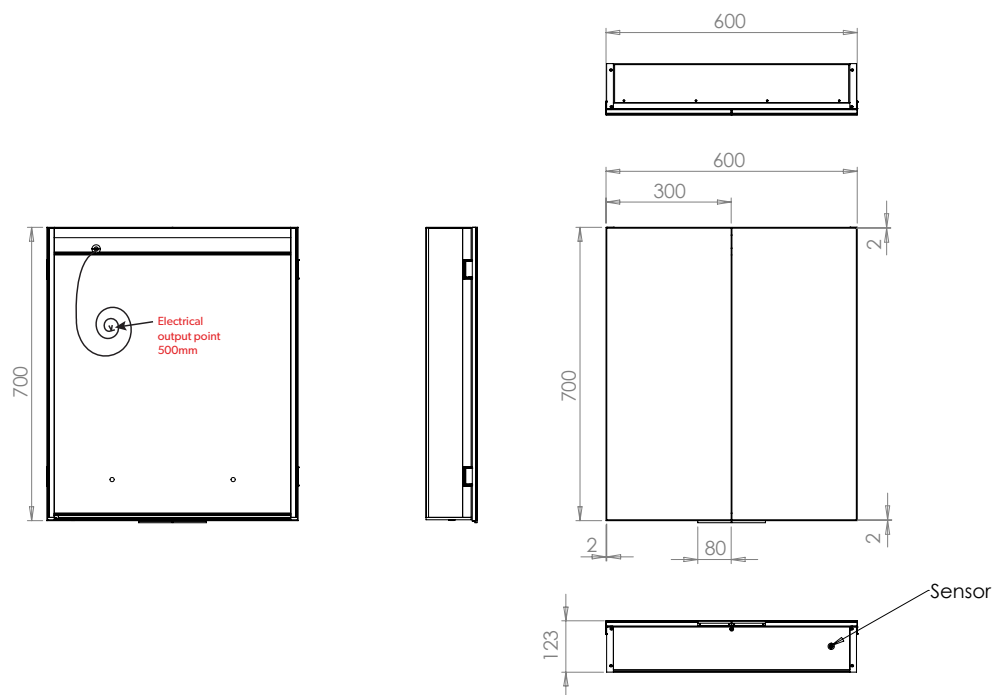

Electrical Safety Information

HiB recommends that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician in accordance with current IEE regulations.


Ensure mains power supply is switched off before starting installation.

Before drilling, ensure there are no hidden cables or pipes in the wall.

HiB recommend you receive the product before commencing with installation as all sizes and measurements are approximate.
 HiB try and ensure all measurements are as accurate as possible.
 In the interest of continuous product development, HiB reserves the right to alter specification as necessary. E & OE.

Exos 80

Art No. 53800

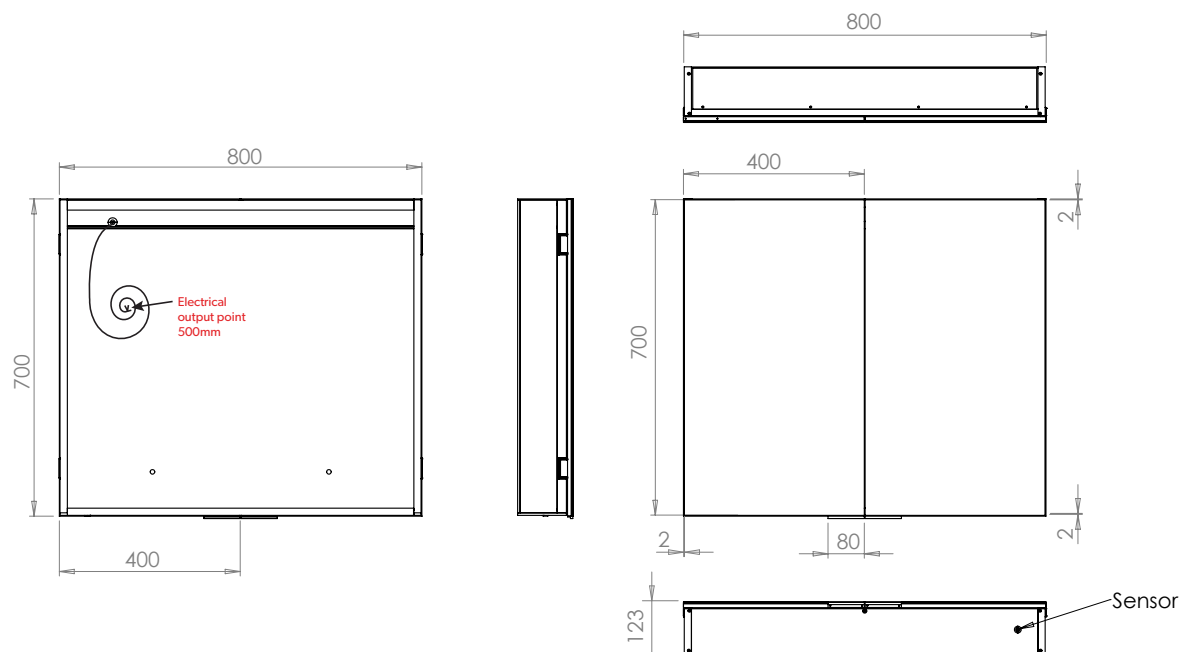

Electrical Safety Information

HiB recommends that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician in accordance with current IEE regulations.


Ensure mains power supply is switched off before starting installation.

Before drilling, ensure there are no hidden cables or pipes in the wall.

Exos

50, 60 & 80

Product FAQ Data Sheet

			Version No. 28.03.19
	Product	Exos 50, Exos 60 & Exos 80	
	Art. No.	Exos 50: 53500, Exos 60: 53600, Exos 80: 53800	
	Product Description	LED illumination single/double door cabinet with sensor switch, USB and integrated charging sockets, Heated pad in mirror door(s) & mirror sides.	

Question	Answer
Gross weight (kg)	Exos 50: 18kg / Exos 60: 22g / Exos 80: 26kg
Light Source	LED
Light Source Average Lifespan	Average: 26,000 hr
Total Rated Wattage (W)	Exos 50: 85w / Exos 60: 98w / Exos 80: 110w
Lumens (Lm)	Exos 50: 2100lm / Exos 60: 2500lm / Exos 80: 3100lm
Kelvins (k)	Exos 50, 60 & 80: 6000k
Is the cabinet dimmable?	No
Energy Rating	Class A
Does the cabinet require an earth connection?	Yes
Can I bypass the sensor so the cabinet comes on with the main room light?	No
Is it cool white or warm white illumination?	Cool white illumination ONLY
What IP rating is the cabinet?	All Exos cabinets are IP44 rated
How long is the warranty?	5 years from date of purchase on silvering coating on mirror 2 years from date of purchase on electrical components in the mirror

Electrical Safety Information

HiB recommends that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician in accordance with current IEE regulations.

Ensure mains power supply is switched off before starting installation.

Before drilling, ensure there are no hidden cables or pipes in the wall.

HiB recommend you receive the product before commencing with installation as all sizes and measurements are approximate.

HiB try and ensure all measurements are as accurate as possible.

In the interest of continuous product development, HiB reserves the right to alter specification as necessary. E & OE.