










ASSEMBLY INSTRUCTION


parts list

Label	Picture	Description	QTY (PCS)
A		Left Armrest	1
B		Right Armrest	1
C		Right Front rail	1
D		Front rail	1
E		Left Front rail	1
F		Left Iron Back Frame	1
G		Iron Back Frame	1
H		Right Iron Back Frame	1
I		Left Iron Seat Frame	1
J		Iron Seat Frame	1
K		Right Iron Seat Frame	1
L		Connecting Wooden Batten	2
M		Link Pipe for Iron Back Frame	4
N		Left Back Cushion	1
O		Back Cushion	1
P		Right Back Cushion	1


parts list

Label	Picture	Description	QTY (PCS)
Q		Seat Cushion	3
R		Pillow	3
S		Metal Middle Leg	4
T		Plastic Leg	4
U		Plastic Washer	4
V		Iron Connecting Plate	2
W	 M6*50MM	Bolt (M6*50)	8
X	 M6*30MM	Bolt (M6*30)	16
Y	 M6*14MM	Bolt (M6*14)	8
Z		Allen Wrench	1
①		Flat Washer	16
②		Nut	8
③		Front Rail Cover	1
④		Backrest Cover	1
⑤		Spanner	1
⑥		Iron Connecting Plate	2


Step 1

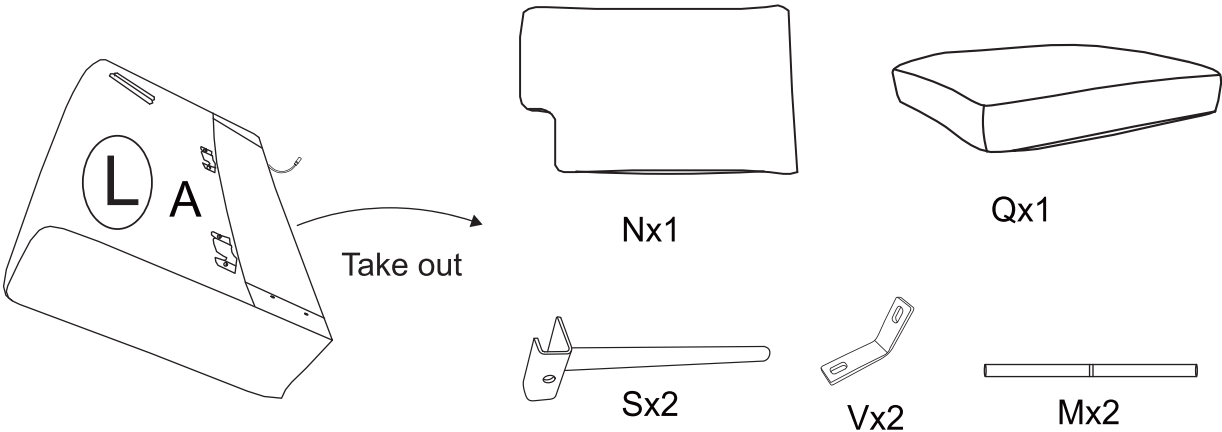


Step 2

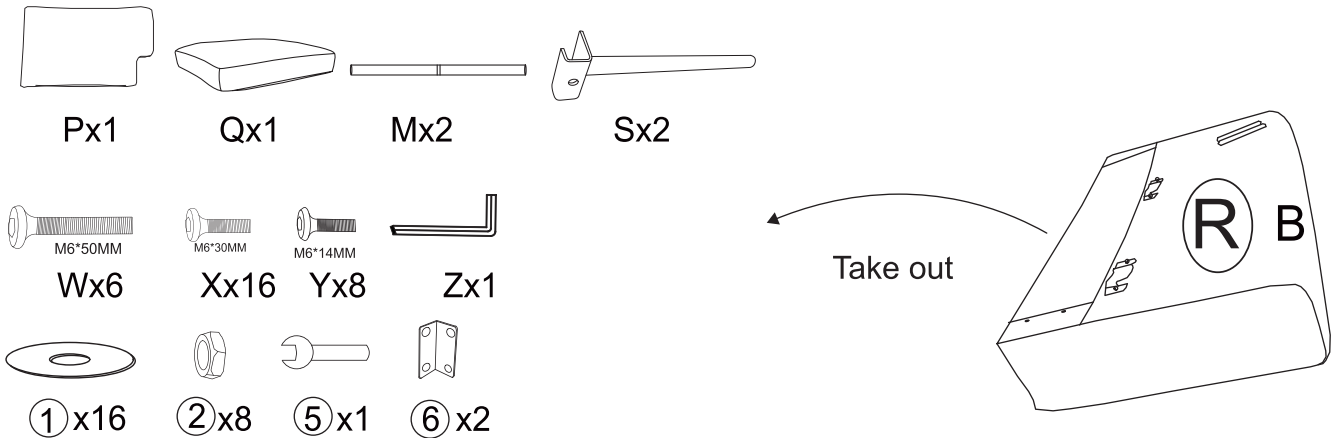


Step 3

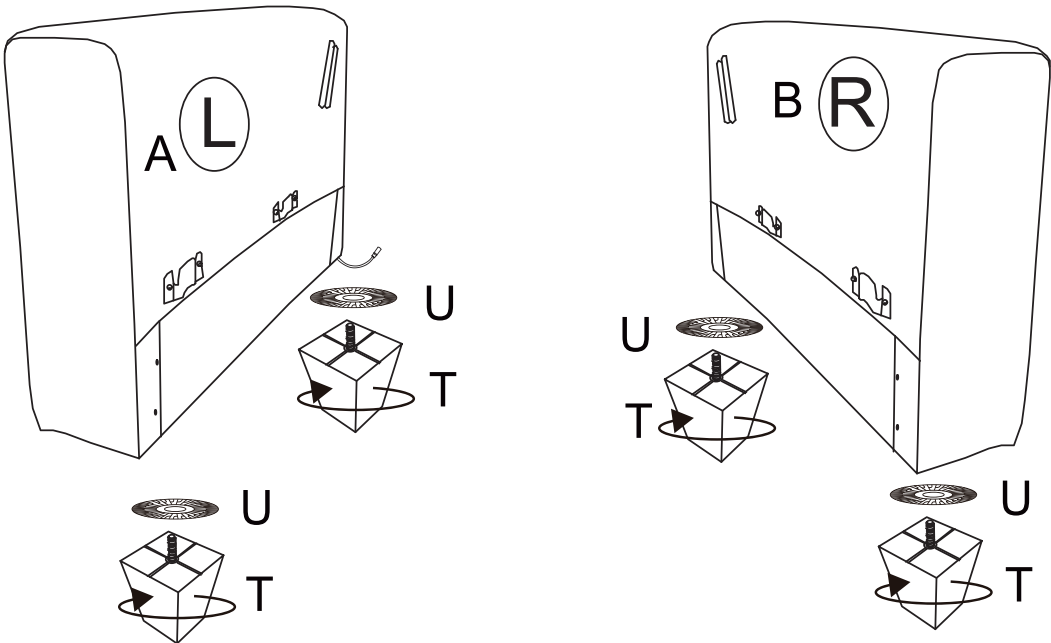


Step 4

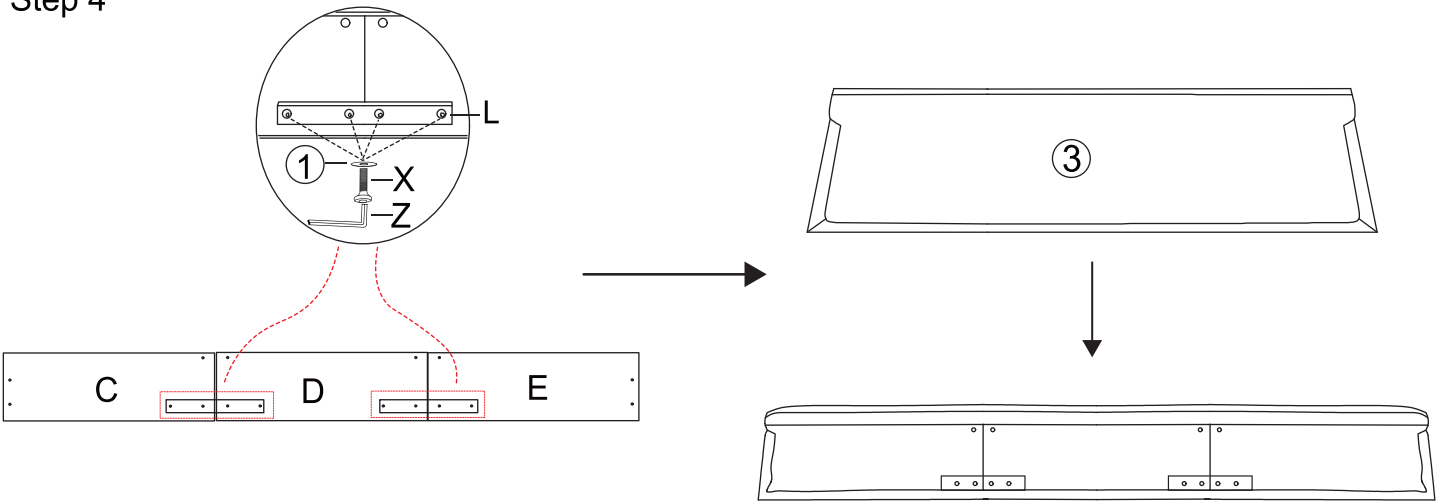


Step 5

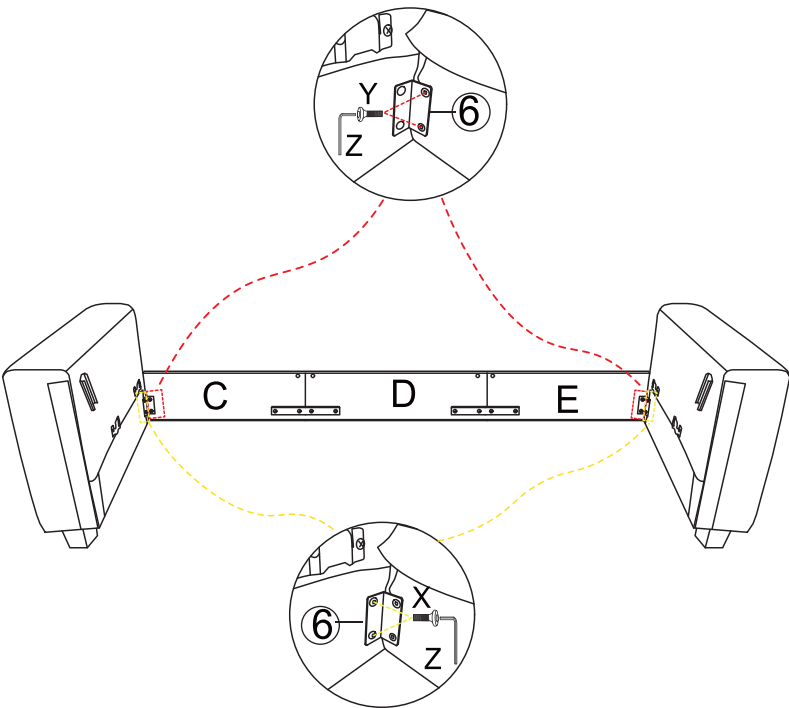


Step 6

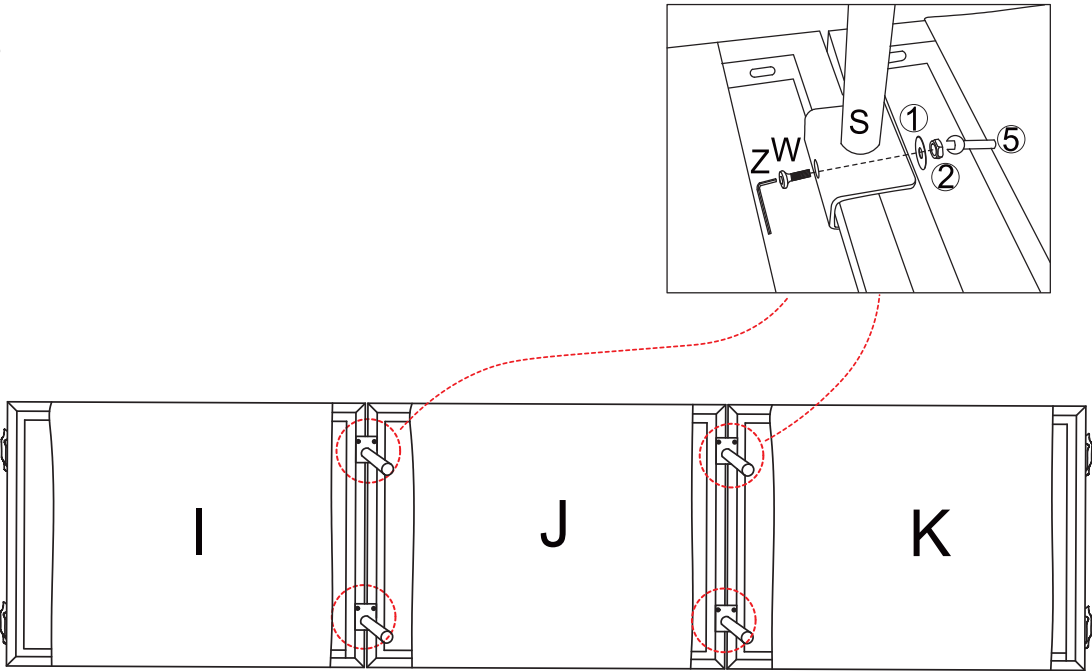


Step 7

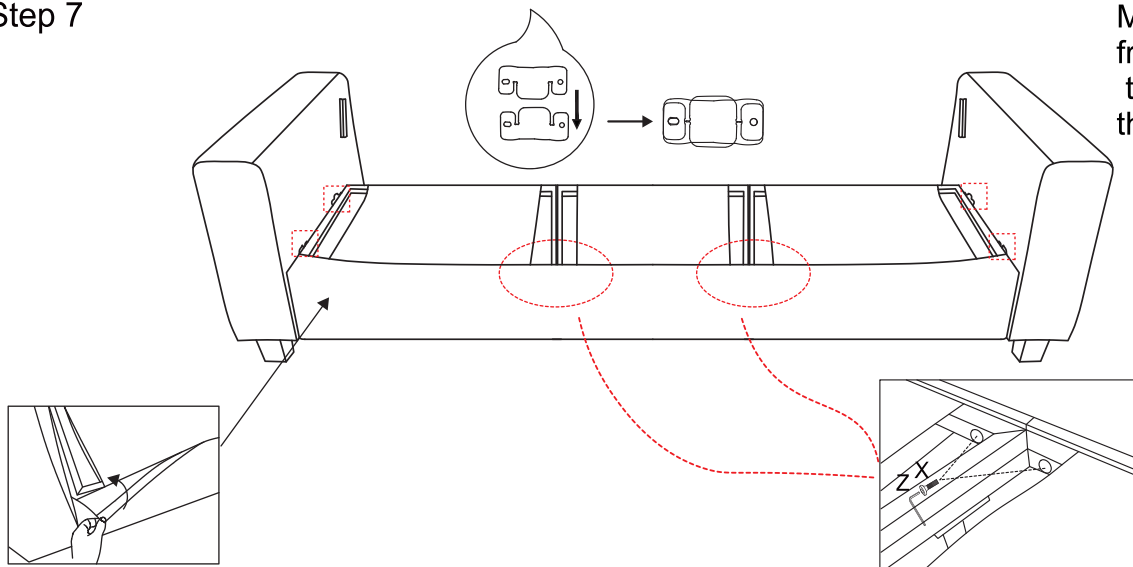


Step 8

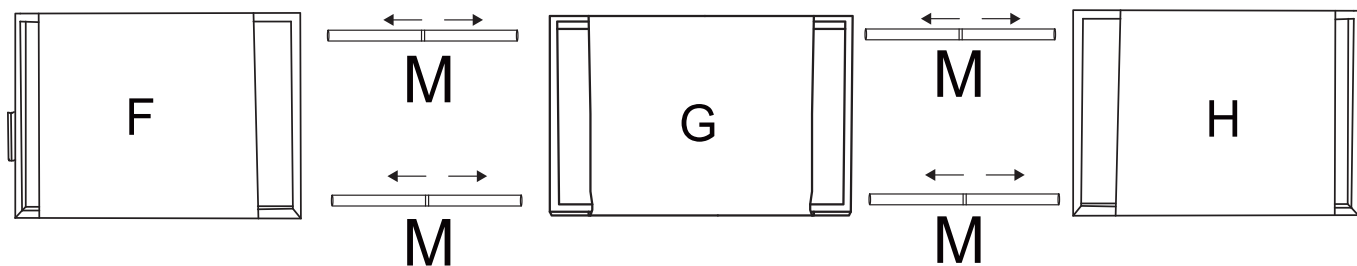


Step 9

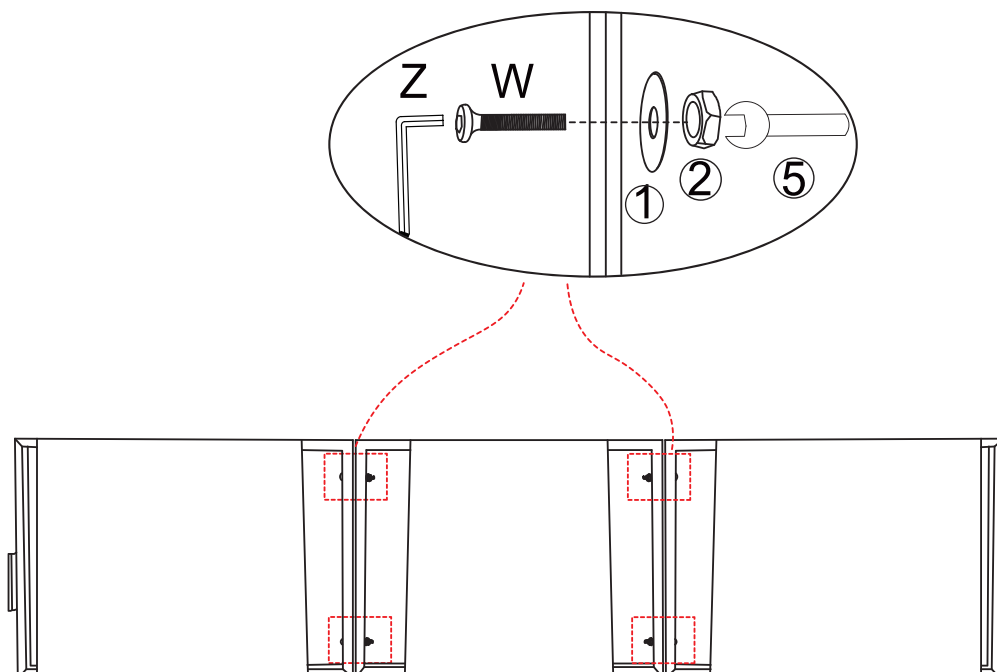

Step 10

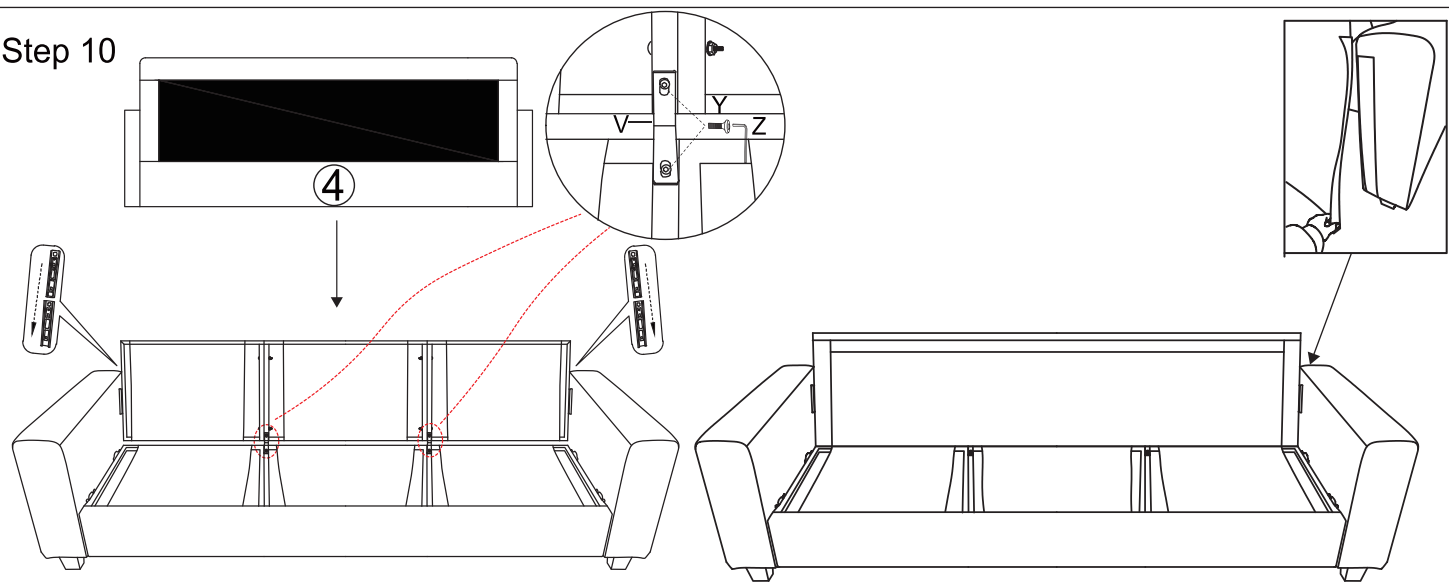

Step 11

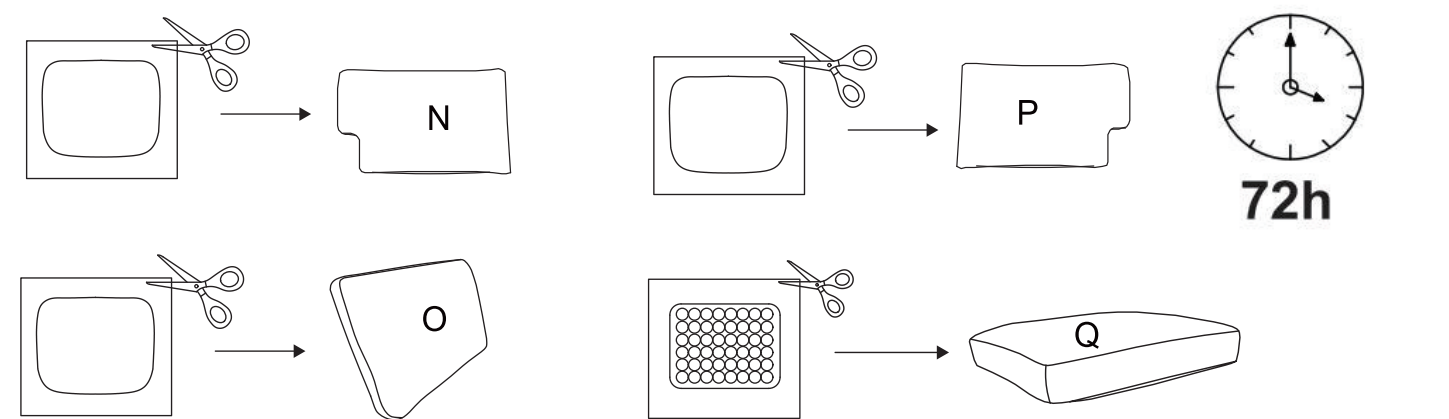

Pat to make it fluffy and assist with regaining its original shape.

Step 12

