




Installation

Hardware List		Hardware List	
 Seat	1	 support leg	1
 Screws and washers 6*70	4	 Hexagonal screw tap	1
 Screws and washers 8*60	6	 Screws and washers 8*40	4


1

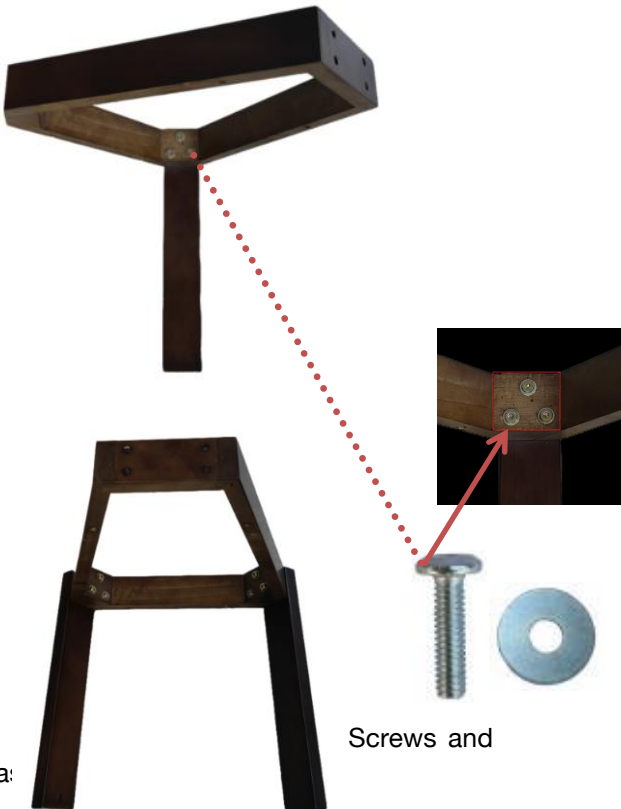


wa: Screws and washers 8*60

First, use 8 * 60 screws to fix the front two wooden legs on the top of the trapezoidal frame, do not tighten the screws, lock the trapezoidal frame on the back wooden frame, then stand the chair up on a flat surface, so that the wooden legs are flat, you can tighten the screws

2

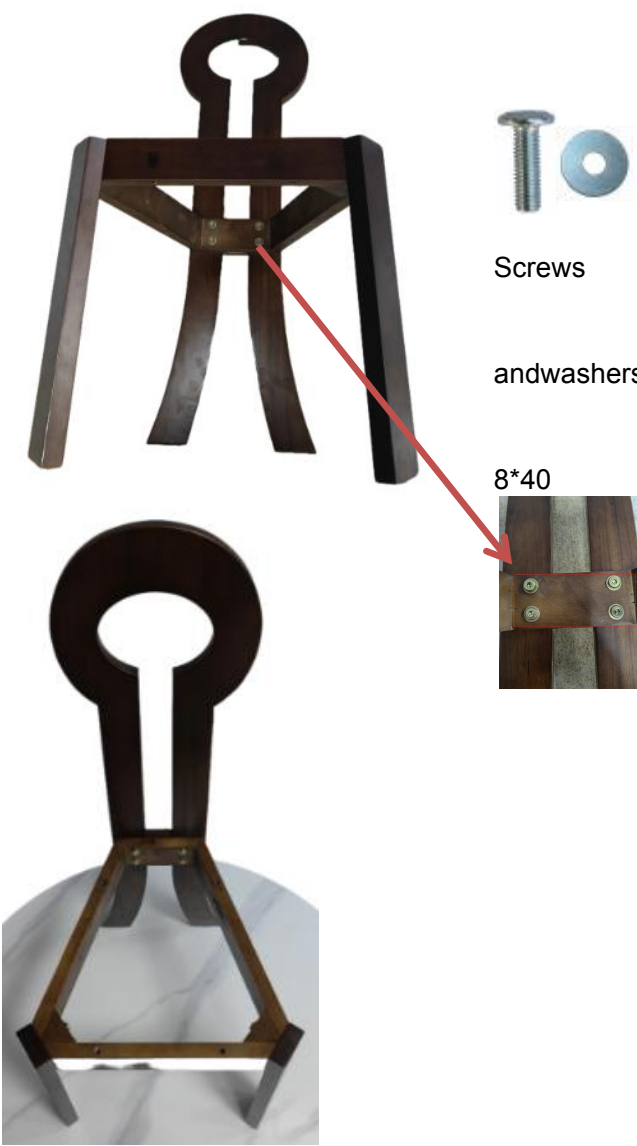

Screws and washers 8*40

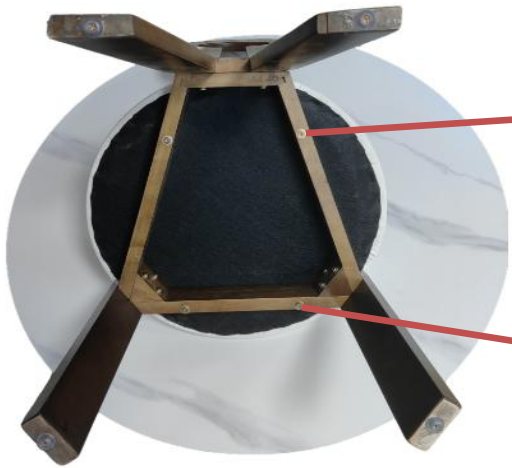

The front and rear hole positions of the seat cover are different. The distance between the front hole is 18 cm and the distance between the rear hole is 20 cm. The front and rear hole positions are determined, and the 6 * 70 screws are fixed to complete the installation.

3

