



BENCH - 26"


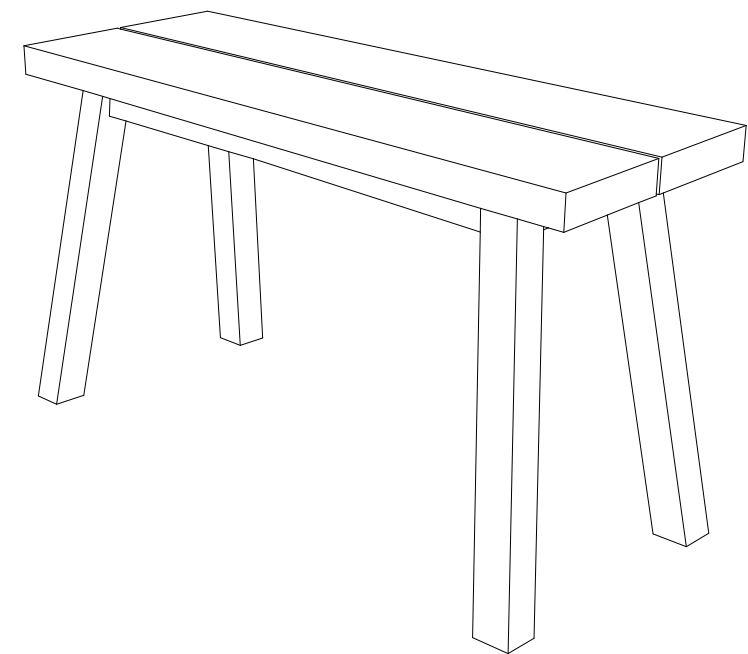


Dear valued customer,

Thank you for letting be a part of your home!Your
choice means a lot, and we're always here for you. If you
have any questions or just want to share your
excitement, reach out through your order – we love
hearing from our wonderful customers.

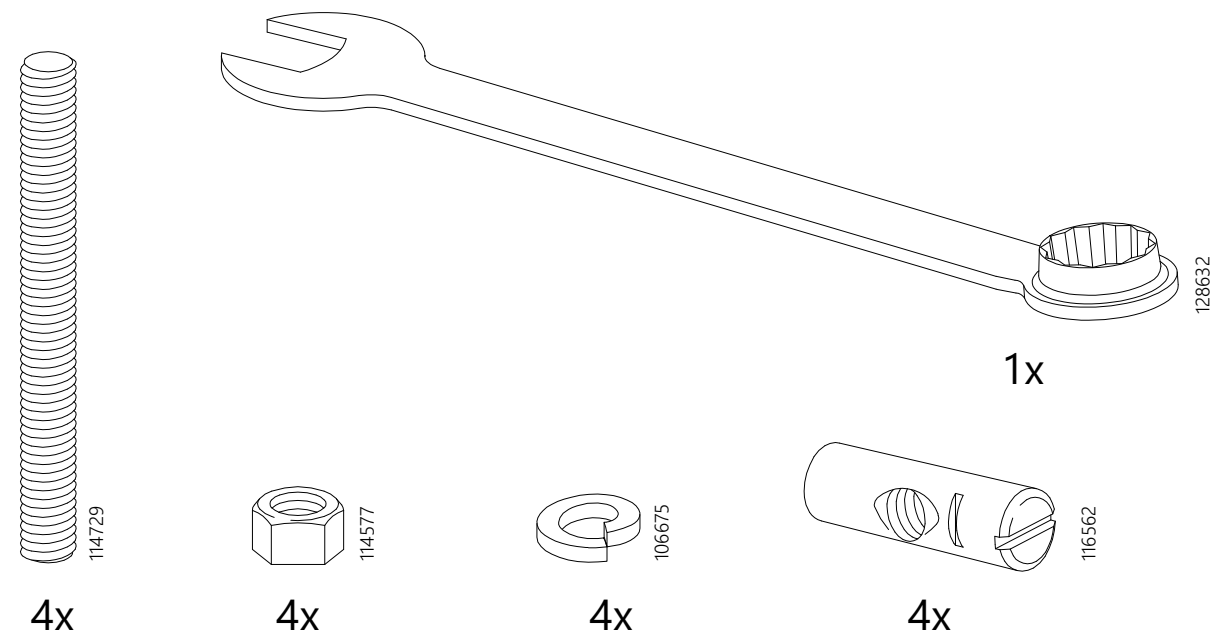

3

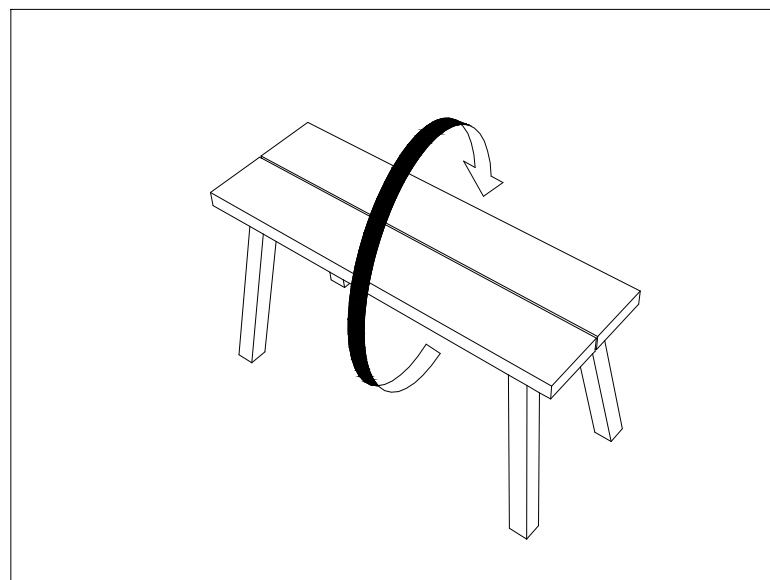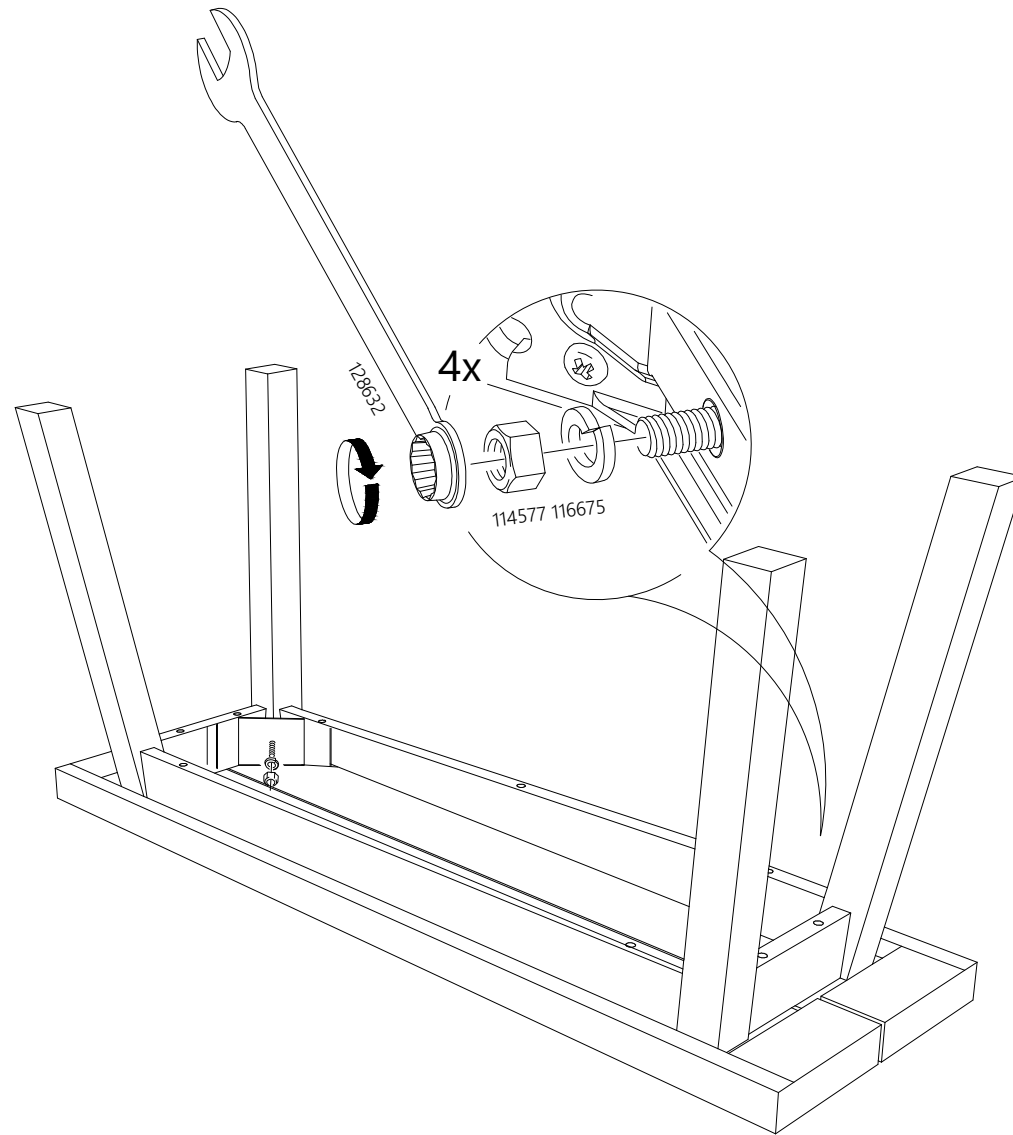

GOOD TO KNOW

Pre-treated with hardwax oil; not necessary to apply any other treatment until the surface begins to wear. May be completed with floor protectors; protect the underlying surface against wear.

MATERIALS & CARE

Material

Main parts

Solid acacia, Wax

Fitting:

Steel, Galvanized

Care

Wipe clean with a damp cloth.

Wipe dry with a clean cloth.

Light stains can be removed with a sponge damped in water or a mild soapy solution.

MAINTENANCE

When the surface starts to wear or becomes dry, it's time to treat with wood treatment oil. Start by cleaning the surface and sand lightly in the direction of the grain using fine sandpaper. Wipe away any sanding dust with a dry cloth. Use a cloth or brush to apply wood treatment oil in a thin, even coat.

Leave to penetrate the surface for approximately 15 minutes. Wipe off any unabsorbed oil with a dry soft cloth. After the first treatment, sand the surface lightly with fine sandpaper. Let the surface dry and repeat the treatment after a few days. To ensure that the product will retain its durable surface for many years to come, treat it with wood treatment oil once a year.

