



Stillness® | K-T97344-4

Floor-mount bath filler trim with handshower

Features

- Single lever handle allows for both on/off activation and temperature setting
- Includes Shift® handshower and 60" shower hose
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- 8 gal/min (30.3 l/min) maximum flow rate [max at 45 psi (3.1 bar)]
- 8-1/2" (216 mm) spout reach
- 33-3/4" max. spout height
- Coordinates with Stillness faucets, accessories, and showering components to complete your bathroom



Sustainability



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-29-2026 23:39 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards



ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Lever

Spout

Spout Reach: 8-1/2" (216 mm)

Flow Rate

Faucet Flow Rate: 6 gpm (22.7 l/min)

Handshower Rated Maximum Flow: 1.75 gpm (6.6 l/min)

Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing


Recommended Products/Accessories

K-23723 Faucet cleaner

Required Products/Accessories

- K-97339 Mounting block for select floor-mount bath fillers



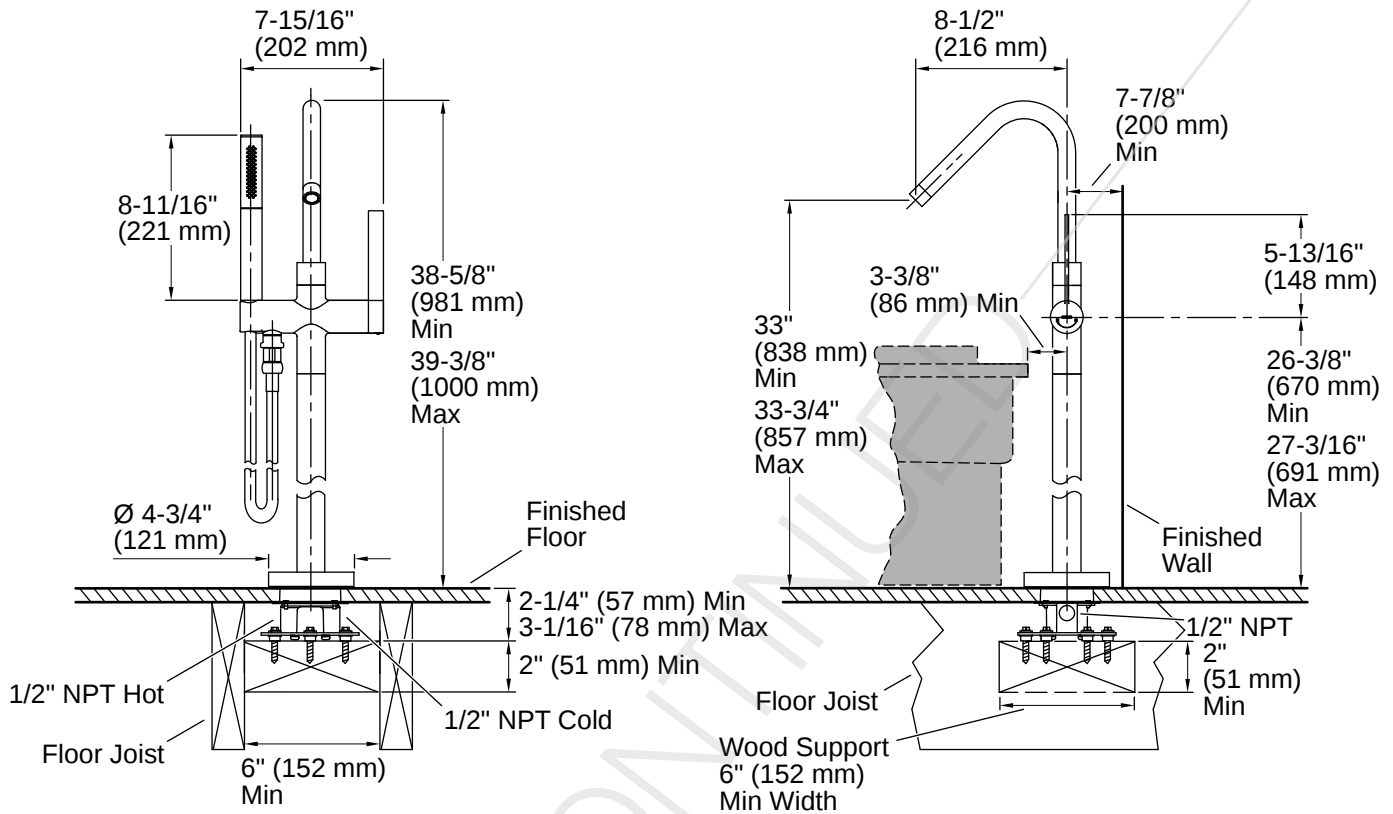

Installation

- Floor-mount
- Compatability with bath varies by application

Installation Notes

Install this product according to the installation instructions.

For use with automatic compensating valves rated at 1.3 gal/min (4.9 l/min) or less.

Adequate floor support is required. The wood support must be a minimum of 2" (51 mm) thick by 6" (152 mm) wide. 2x6 lumber is NOT adequate for this application.

Concrete can be used as the floor support. Requires 3/16" masonry drill bit and six 1/4" x 1-3/4" concrete screws, not included.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-29-2026 23:39 - US-CA