

TOTO®


CST784EF Eco Clayton® Traditional Two Piece Toilet, 1.28 GPF




CST784EF - Eco Clayton® Toilet
SS154 - Traditional SoftClose Seat



E-Max Technology:
Quiet, powerful,
commercial
grade flushing
performance.



Choose a SoftClose
toilet seat, or
upgrade to
a Washlet.

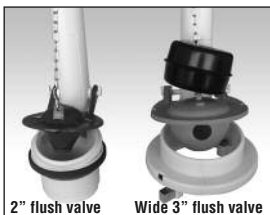

Fast Flush: New, wide 3" flush
valve is 125% larger than
conventional 2" flush valves.



- Traditional design,
two-piece toilet.
- Universal Height 16-1/8"
rim height.
- Wide 2-1/8" computer
designed trapway
- E-Max Flushing Technology
- Powerful, quiet flush
every time
- Large water surface

High profile ADA compliant
two-piece toilet with 12" rough-in.
High efficiency (1.28Gpf/4.8Lpf)
siphon jet flushing action.

Tank cover, fittings, color
matched trip lever, less seat.

■ CST784EF

Elongated toilet, less seat. 12"
rough-in.

□ C784EF

Elongated front Eco bowl only,
12" rough-in.

□ ST784E

Eco Clayton tank and cover only.
Complete with tank trim and
coupling components.

□ SS154

Traditional SoftClose Seat:
Traditional styled seat and lid
gently close with a touch of the
hand. Elongated, closed front seat
with lid.

□ SS114

Elongated closed front toilet seat
and cover with SoftClose hinge
system. Mounting hardware
included.

Colors:

Standard #01 Cotton

Optional See price book for
additional colors

Trip Lever:

Standard Color Matched

Optional See price book for
additional finishes



ADA Compliant

For installation condition with
approach from the left hand
side.

CST784EF

Eco Clayton® Traditional Two Piece Toilet, 1.28 GPF

■ PERFORMANCE

The TOTO E-Max low consumption toilets received high ratings during ANSI/ASME at independent laboratories.

Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

■ SPECIFICATIONS

Water Use: 1.28 Gpf/4.8 Lpf
 Flush System: Gravity Feed
 (E-Max Technology)
 Min. Water Pressure: 8 psi
 Water Surface: 10-5/8" x 8-1/4"
 Trap Diameter: 2-1/8"
 Rough In: 12" rough in
 Trap Seal: 2-3/8"
 Warranty: Five Year Limited Warranty
 Material: Vitreous china

Shipping Weight: **C784EF-Bowl**
 62 lbs.
ST784E-Tank
 36.5 lbs.

Shipping Dimensions: **C784EF-Bowl**
 30"L x 12-1/4"W¹
 x 14-5/8"W² x 18-1/8"H

ST784E-Tank
 22-1/8"L x 10"W
 x 17-3/4"H


Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 requirements.

*Listing / Approvals: shall be IAPMO/c-UPC certified.
 Shall be Watersense compliant.*



Meets the Americans with Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17" from the finished floor. Recommended seat for ADA requirements: TOTO model #SS154.

These dimensions and specifications are subject to change without notice.

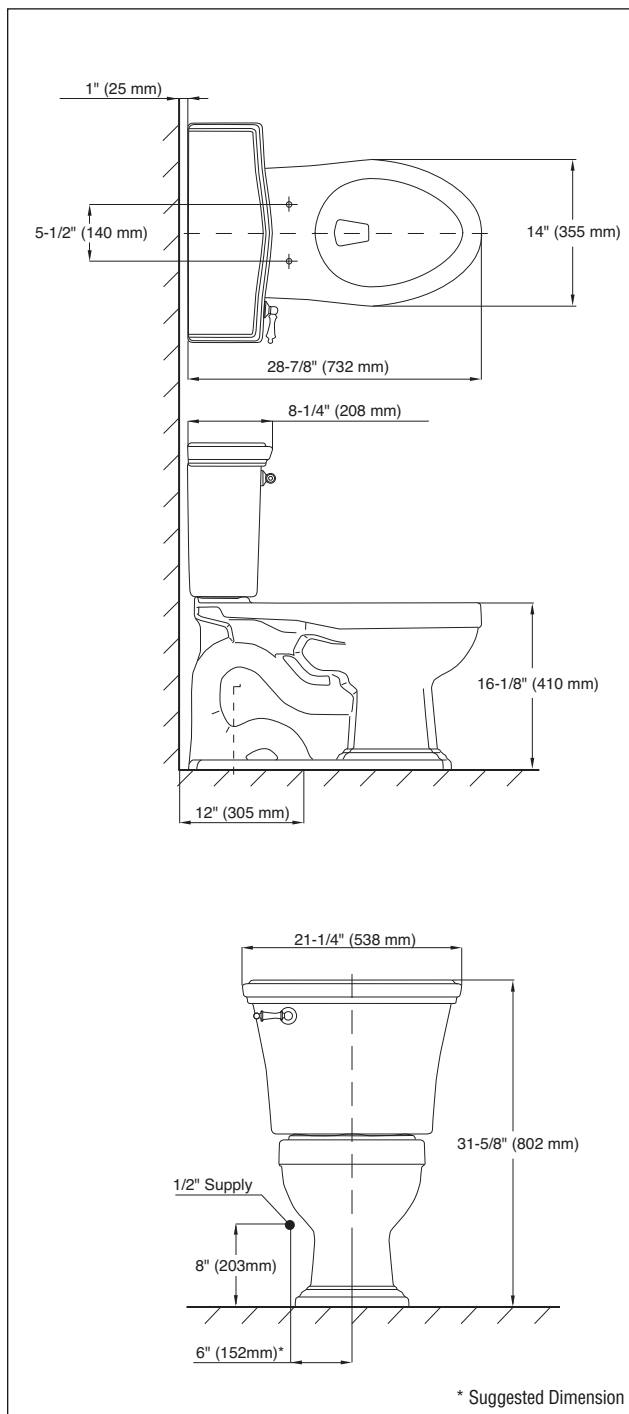

CST784EF - Eco Clayton® Toilet
SS154 - Traditional SoftClose Seat

TOTO®

TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (770) 282-8686 • Fax. (770) 282-8701 • www.totousa.com
 Printed in U.S.A. © TOTO LTD. 08/07 #A10420

Printed on recycled paper

REV 11/08