





## CYMBAL LARGE & EXTRA-LARGE PENDANTS

PBPD35027; PBPD35127

### General Product Information



### Suggested/Required Tools



### Safety Information

#### CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

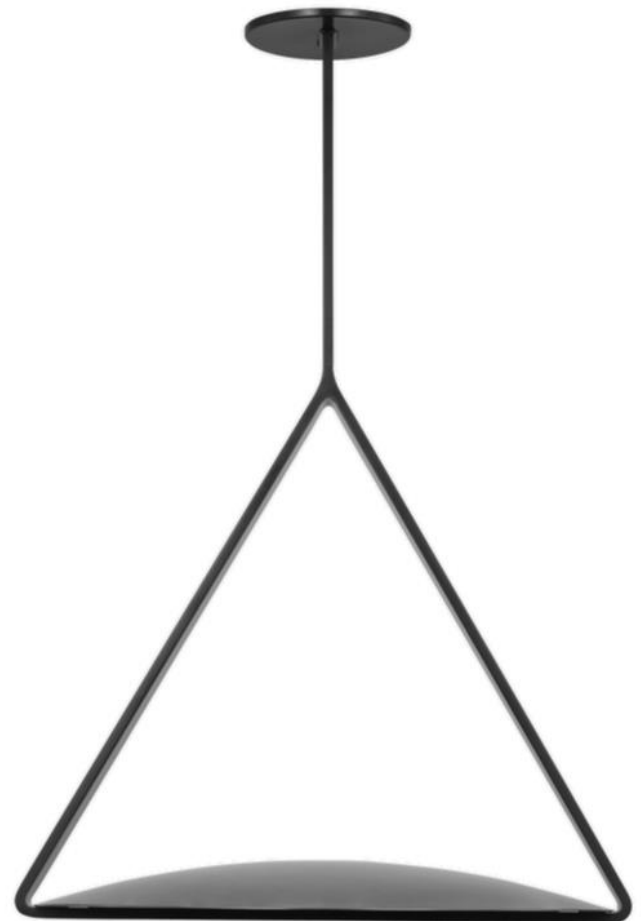

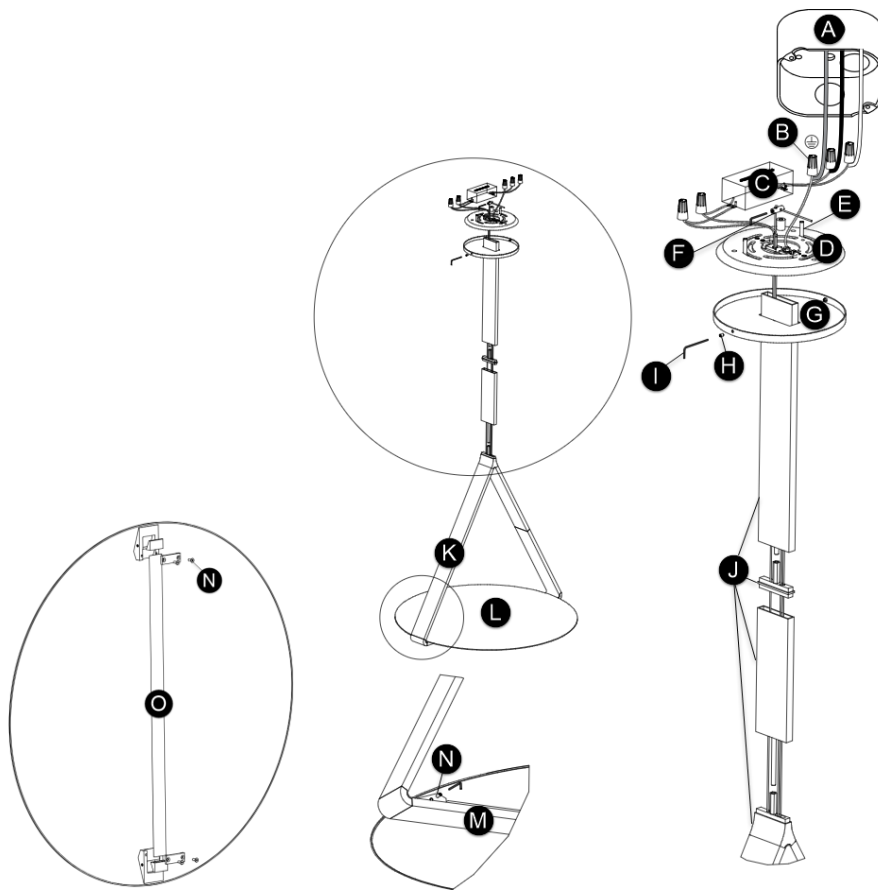

## FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate
- E. Mounting Screws
- F. Safety Cable with Set Screw
- G. Canopy
- H. Canopy Screws
- I. Allen Wrench
- J. Stem Assembly
- K. Fixture Body
- L. Shade
- M. Front Bracket and LED Crystal
- N. Shade Screws
- O. Back Bracket

## INSTRUCTIONS

### I. Preparing the Fixture

1. Remove the mounting plate and driver from the canopy.
2. Secure the mounting plate to the junction box using the mounting screws.
3. Determine the desired height of the fixture:
  - a) Feed the fixture wires and safety cable through the stem assembly, canopy and mounting plate.
  - b) Loop the safety cable over a stable structure that agrees with the local building code and secure it with the set screw.
  - c) Attach the shade and front bracket to the LED crystal with the shade screws.
  - d) Using the Allen wrench to fasten the set screws, attach the front and back brackets together to secure the fixture.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Adjust the length the wires using a wire stripper/cutter, if necessary.
4. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Black driver wire (output) to black fixture wire
  - b) Red driver wire (output) to red fixture wire
  - c) Black driver wire (input) to hot power line wire
  - d) White driver wire (input) to neutral power line wire
5. Place the driver into the mounting bracket and tuck all the wire into the junction box.

### III. Installing the Fixture

1. Lift and push the canopy into place against the mounting plate on the ceiling and secure it in place with the canopy screws.
2. Attach the stem assembly to the fixture body with the attached shade.
3. Install the shade bracket with the LED to the fixture and secure it with the set screws to finish.