


# Product Manual


1. Turn off the power, and install the mounting plate onto the junction box with screws. Connect the wires on the lamp body to the corresponding wires in the junction box. (L), (E), and (N).

2. Mount the main body onto the mounting plate and secure it with screws.

3. Install the glass shade and secure it with the plastic ring on the socket; then, install the light source (E26).

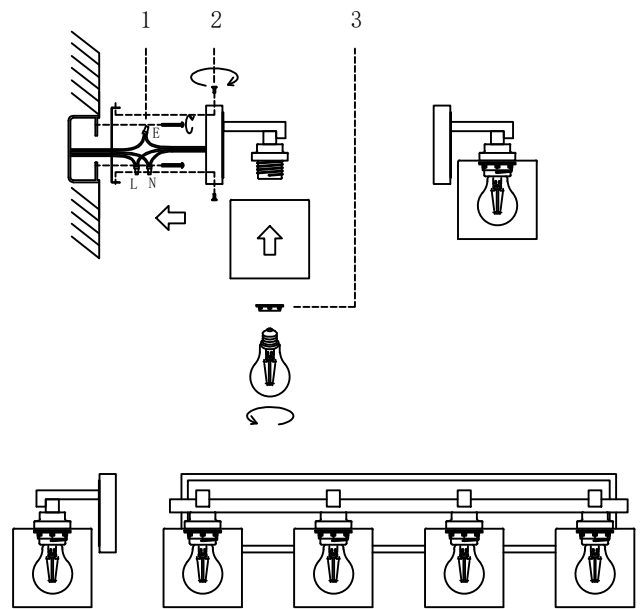

THN 00315-2  
THN 00315-3  
THN 00315-4  
THN 00315-5  
THN 00315-6

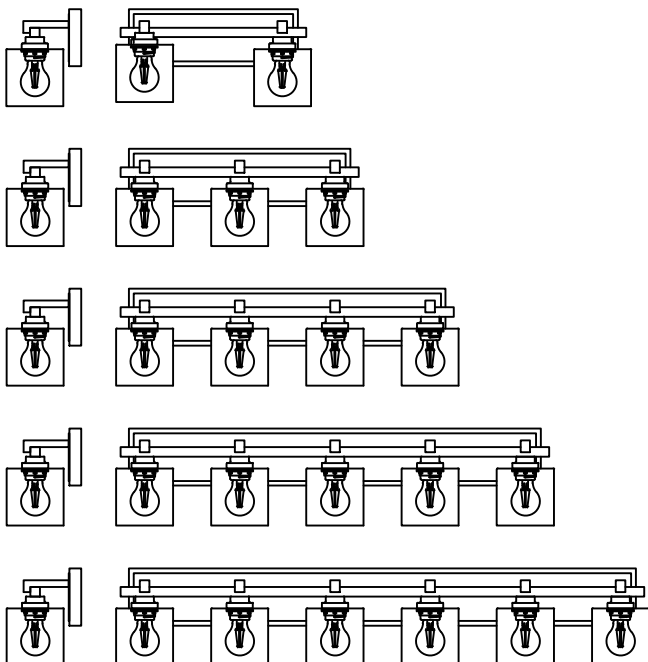

## WARNING

(To reduce the risk of fire, electric shock, or injury to persons):

1. We suggest installation by a licensed electrician.
  2. Please read the instructions carefully and save them, as you may need them later.
  3. Before you start, NEVER attempt any work without shutting off the electricity until the work is completed.
    - A) Go to the main fuse or circuit breaker box in your home. Place the main power switch in the "OFF" position.
    - B) Place the wall switch in the "OFF" position.
  4. The mounting surface should be clean, dry, flat, and strong enough, and it should be 1/4" larger than the canopy on all sides. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
  5. Make sure that the ceiling or wall can bear the weight of the lamp before installation.
  6. Make sure the voltage you are using is 120V. The maximum wattage is 60W per bulb.
  7. Keep the lamp away from acidic objects to avoid damaging the surface of the lamp.
  8. When replacing a bulb, you should turn off or unplug the lamp and wait until it is cool, as bulbs get hot quickly.
  9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution, and care must be used with any electrical products.
  10. Do not touch the bulb or lampshade while the lighting fixture is in operation.
- Image for finished product: