

Project: _____

Fixture Type: _____

Location: _____

Contact: _____

LED Ceiling Mount • Damp Location



Specifications:

Description:

This fixture features a 120V alternating current (AC) source which eliminates the need for a traditional LED driver.

Construction:

- White Glass diffuser
- Plated Brushed Nickel
- Steel construction
- LED Module is replaceable
- Flicker-free dimming to 10% brightness with most ELV type dimmers (See Dimming Notes)
- CA Title 24 Compliant
- Covers a standard 4" recessed outlet box
- Mounting strap for outlet box included


Performance:

Number of Modules	1
Input Power	17W
Input Voltage	120V
Input Frequency	60Hz
Lumens	1211 (LM-79)
CCT	3000K
CRI	90
LPW	71
Life	60,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Min. Start Temp	-30° C
Max. Operating Temp	30° C
Warranty	5 yrs.
Labels	cCSAus certified for damp locations ENERGY STAR® qualified

Images:



Dimensions:

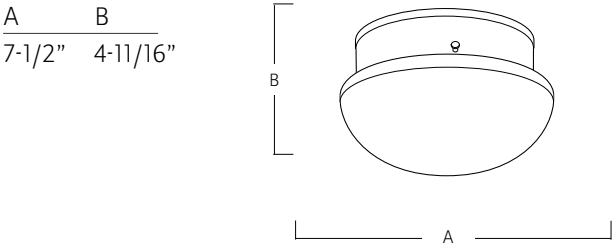

Catalog number:

Finish	Color Temp	CRI
Brushed Nickel	3000K	90 CRI



Dimming Notes:

This fixture is designed to be compatible with many Electronic Low Voltage (ELV-Reverse Phase) controls. The following is a partial list of known compatible dimmer controls:

Electronic Low Voltage ELV Reverse Phase Controls

Lutron	Diva Series	(Part Number DVELV-300)
Lutron	Nova T Series	(Part Number NTELV-300)
Lutron	Vierti Series	(Part Number VTELV-600)
Lutron		(Part Number MAELV-600)
Lutron		(Part Number SPELV-600)
Leviton		(Part Number AWRMG-EAW)
Leviton		(Part Number 6615-P)

Digital type dimmers are not recommended.

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.