

ASSEMBLY & INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Take the parts out of the mounting package. Place mounting strap (2) up against your junction box (1). Position the mounting strap (2) so that the holes on the side are level and parallel with the ceiling. Secure mounting strap (2) to the Ceiling junction box (1) using mounting screws (3) and a screwdriver. Tighten the screws securely. Pull the power supply (8 & 10) and the supply ground wire (6) out from the junction box (1) through the center of mounting strap (2).
2. Attach the BLACK SUPPLY WIRE (10) to the SMOOTH (or BLACK) FIXTURE LEAD WIRE (9) by using the WIRE CONNECTOR (13). At the same manner, attach the WHITE SUPPLY WIRE (8) to the RIBBED (or WHITE) FIXTURE LEAD WIRE (7). Loop the FIXTURE GROUND WIRE (5) around the GROUND SCREW (4) of the MOUNTING PLATE (2). (Note: Be sure to provide an extra 3" length of the FIXTURE GROUND WIRE (5) for connection to the SUPPLY GROUND WIRE (4).) Tighten the GROUND SCREW (4). Connect the remaining FIXTURE GROUND WIRE (5) to the SUPPLY GROUND WIRE (4) using a WIRE CONNECTOR (13). Place wiring and connections inside the JUNCTION BOX (1).
3. Place canopy (12) over mounting strap (2). Ensure the holes in the canopy and on the side of the mounting bracket align. Insert small screws (11) into the holes on the side of the canopy (12) to secure it to mounting strap (2).
4. Thread the SHADE (17) and ROUND PLATE (15) onto the SOCKET (14) and till tighten with SOCKET RING (16).

5. Screw light bulbs into the lamp sockets (14) and make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label, **MAXIMUM 60W.**

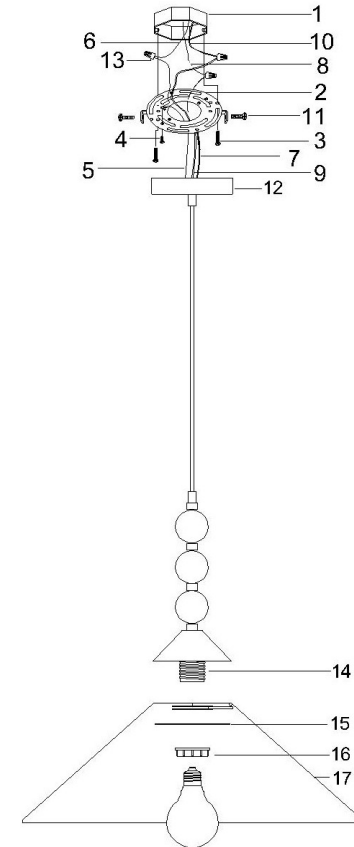

- | | |
|----------------------------|----------------------------|
| 1. JUNCTION BOX | 9. BLACK FIXTURE LEAD WIRE |
| 2. MOUNTING STRAP | 10. BLACK SUPPLY WIRE |
| 3. MOUNTING SCREW | 11. SCREW |
| 4. GROUND SCREW | 12. CANOPY |
| 5. FIXTURE GROUND WIRE | 13. WIRE CONNECTOR |
| 6. SUPPLY GROUND WIRE | 14. SOCKET |
| 7. WHITE FIXTURE LEAD WIRE | 15. ROUND PLATE |
| 8. WHITE SUPPLY WIRE | 16. SOCKET RING |
| | 17. SHADE |