CARE AND MAINTENANCE

Store outdoor furniture indoors or cover well when not in use. Remove wooden furniture from standing water. Dust regularly with small brush or vacuum Spills should be taken care of immediately before they harden or stain with a slightly dampened sponge.

NOTICE

- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * This item may require periodic tightening

Weight Capacity: 275 lbs (single seat)

550 lbs (two person seat)


Warning : Do not stand on bench


Warning: Do not over torque bolts/screws







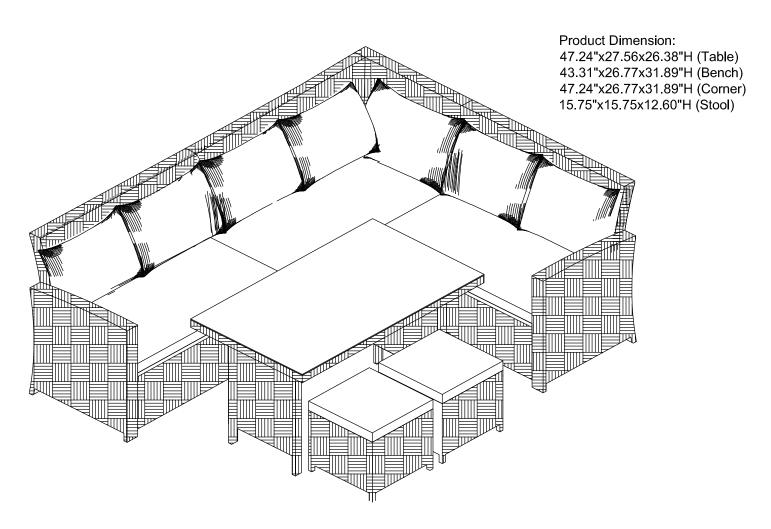

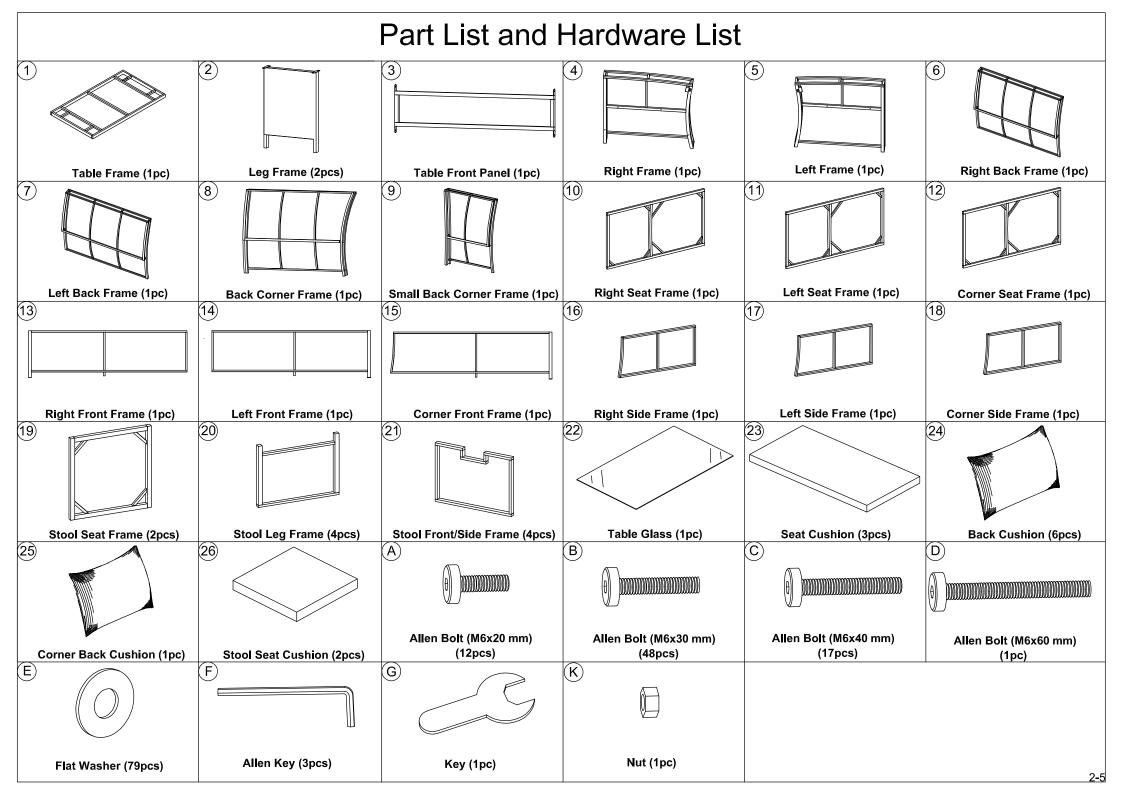

CARE AND MAINTENANCE

Store outdoor furniture indoors or cover well when not in use. Remove wooden furniture from standing water. Dust regularly with small brush or vacuum Spills should be taken care of immediately before they harden or stain with a slightly dampened sponge.

NOTICE

- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * This item may require periodic tightening

Weight Capacity: 275 lbs (single seat)

550 lbs (two person seat)

Warning : Do not stand on bench

Warning: Do not over torque bolts/screws









Part List and Hardware List


| PIECE | DESCRIPTION | PICTURE | QUANTITY |
|-------|-------------------------|----------------|----------|
| 8 | Back Corner Frame | Ш | 1X |
| 9 | Small Back Corner Frame | \blacksquare | 1X |
| 12 | Corner Seat Frame | | 1X |
| 15 | Corner Front Frame | | 1X |
| 18 | Corner Side Frame | Ш | 1X |
| 23 | Seat Cushion | | 1X |
| 24 | Back Cushion | | 2X |
| 25 | Corner Back Cushion | | 1X |
| В | Allen bolt(M6x30 mm) | 0 | 8X |
| С | Allen bolt(M6x40 mm) | 0 | 5X |
| D | Allen bolt(M6x60 mm) | 0 | 1X |
| Е | Flat Washer | 0 | 15X |
| F | Allen Key | | 1X |
| G | Key | 3 | 1X |
| K | Nut | © | 1X |

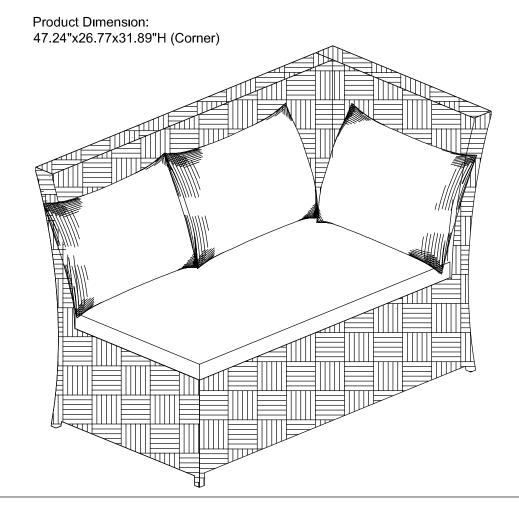

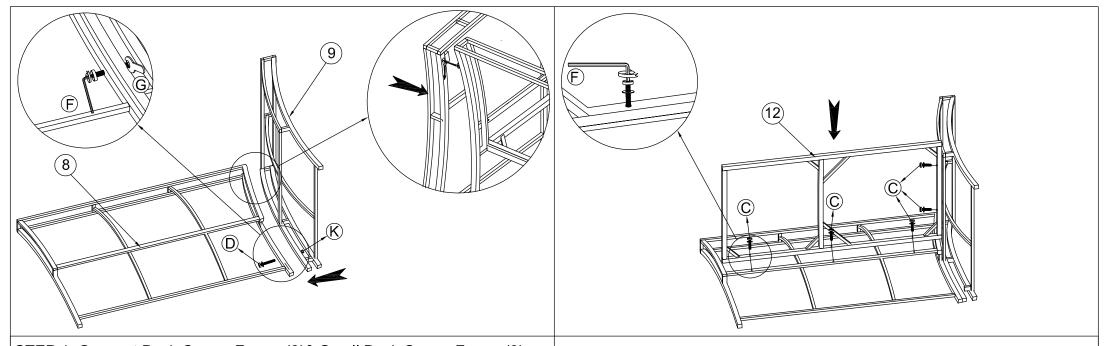


STEP 1: Connect Back Corner Frame (8)& Small Back Corner Frame (9), tighten Allen Bolt (D), Flat Washer (E)& Eru (K) with Allen Key (F) & Key (G).

STEP 2: Connect The Part from Step 1 and Corner Seat Frame (12), tighten Allen Bolt (C),Flat Washer (E) with Allen Key (F).

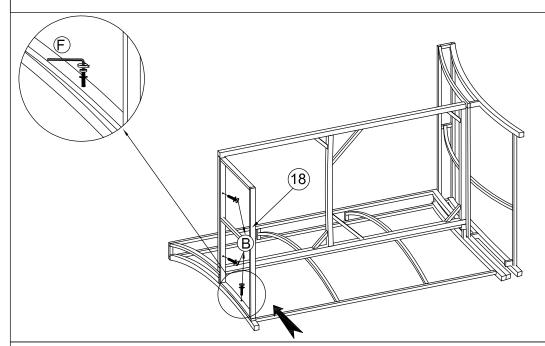

STEP 3: Connect The Part from Step 2 and Corner Side Frame (18), tighten Allen Bolt (B), Flat Washer (E) with Allen Key (F).

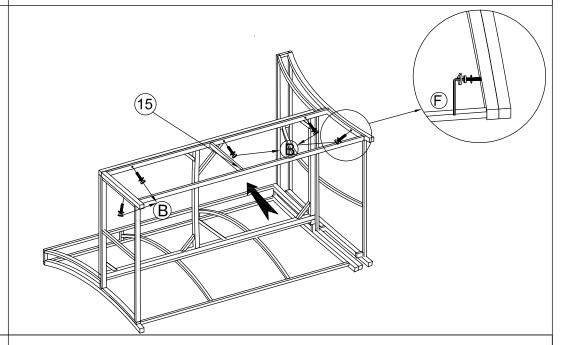

STEP 4: Connect The Part from Step 3 and Corner Front Frame (15), tighten Allen Bolt (B), Flat Washer (E) with Allen Key (F).

