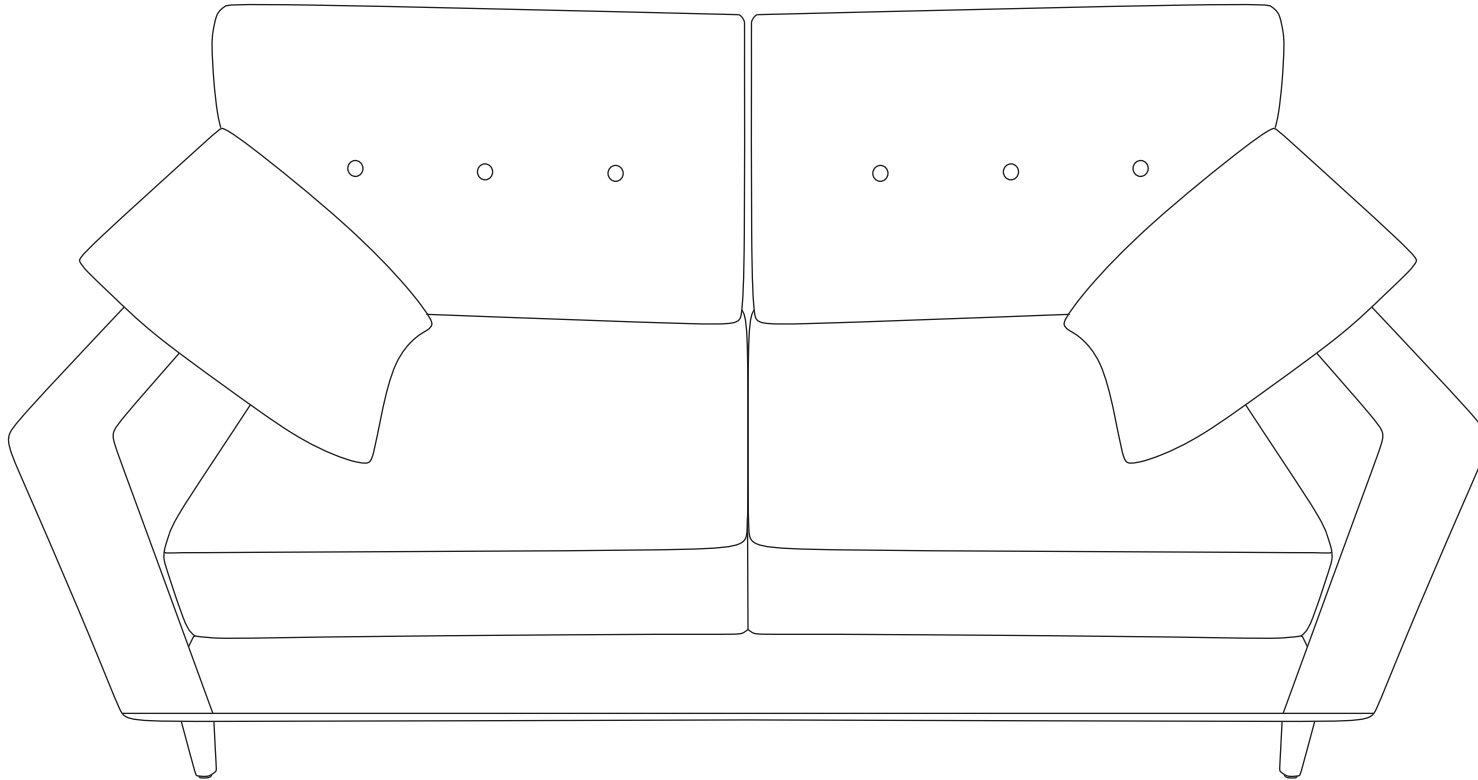


Instruction Manual

User Guide >>>



Make Life Better


Warm tips: We are proud of high-quality products and satisfactory service, but the goods may encounter special circumstances during transportation, if you receive the goods with missing or damaged parts, please take photos and contact our customer service before returning the goods , we will customize a solution that satisfies you, thank you.



TIME












2 OF PEOPLE



DIFFICULTY

Instruction


NO	DESCRIPTION		QTY
A	Backrest		1
B	Seat Frame		1
C	Left Armrest		1
D	Right Armrest		1
E	Left Seat Cushion		1
F	Right Seat Cushion		1
G	Throw Pillow		2
H	Seat Cushion		2
I	Legs		4

NO	DESCRIPTION			QTY
J	Screw	Φ5/16 "2"L		10
K	Flat Washer	Φ5/16"*22mm		10
L	Lock Washer	Φ5/16"		10
M	Allen Wrench	Φ5mm		1
N	Screw	Φ1/4"*1L		16
O	Flat Washer	Φ1/4"*18mm		16
P	Lock Washer	Φ1/4"*1.3mm		16
Q	Allen Wrench	Φ4mm		1


Installation Steps

*Before installation, please remove the compressed seat cushion, backrest, and lumbar support from boxes A and B.

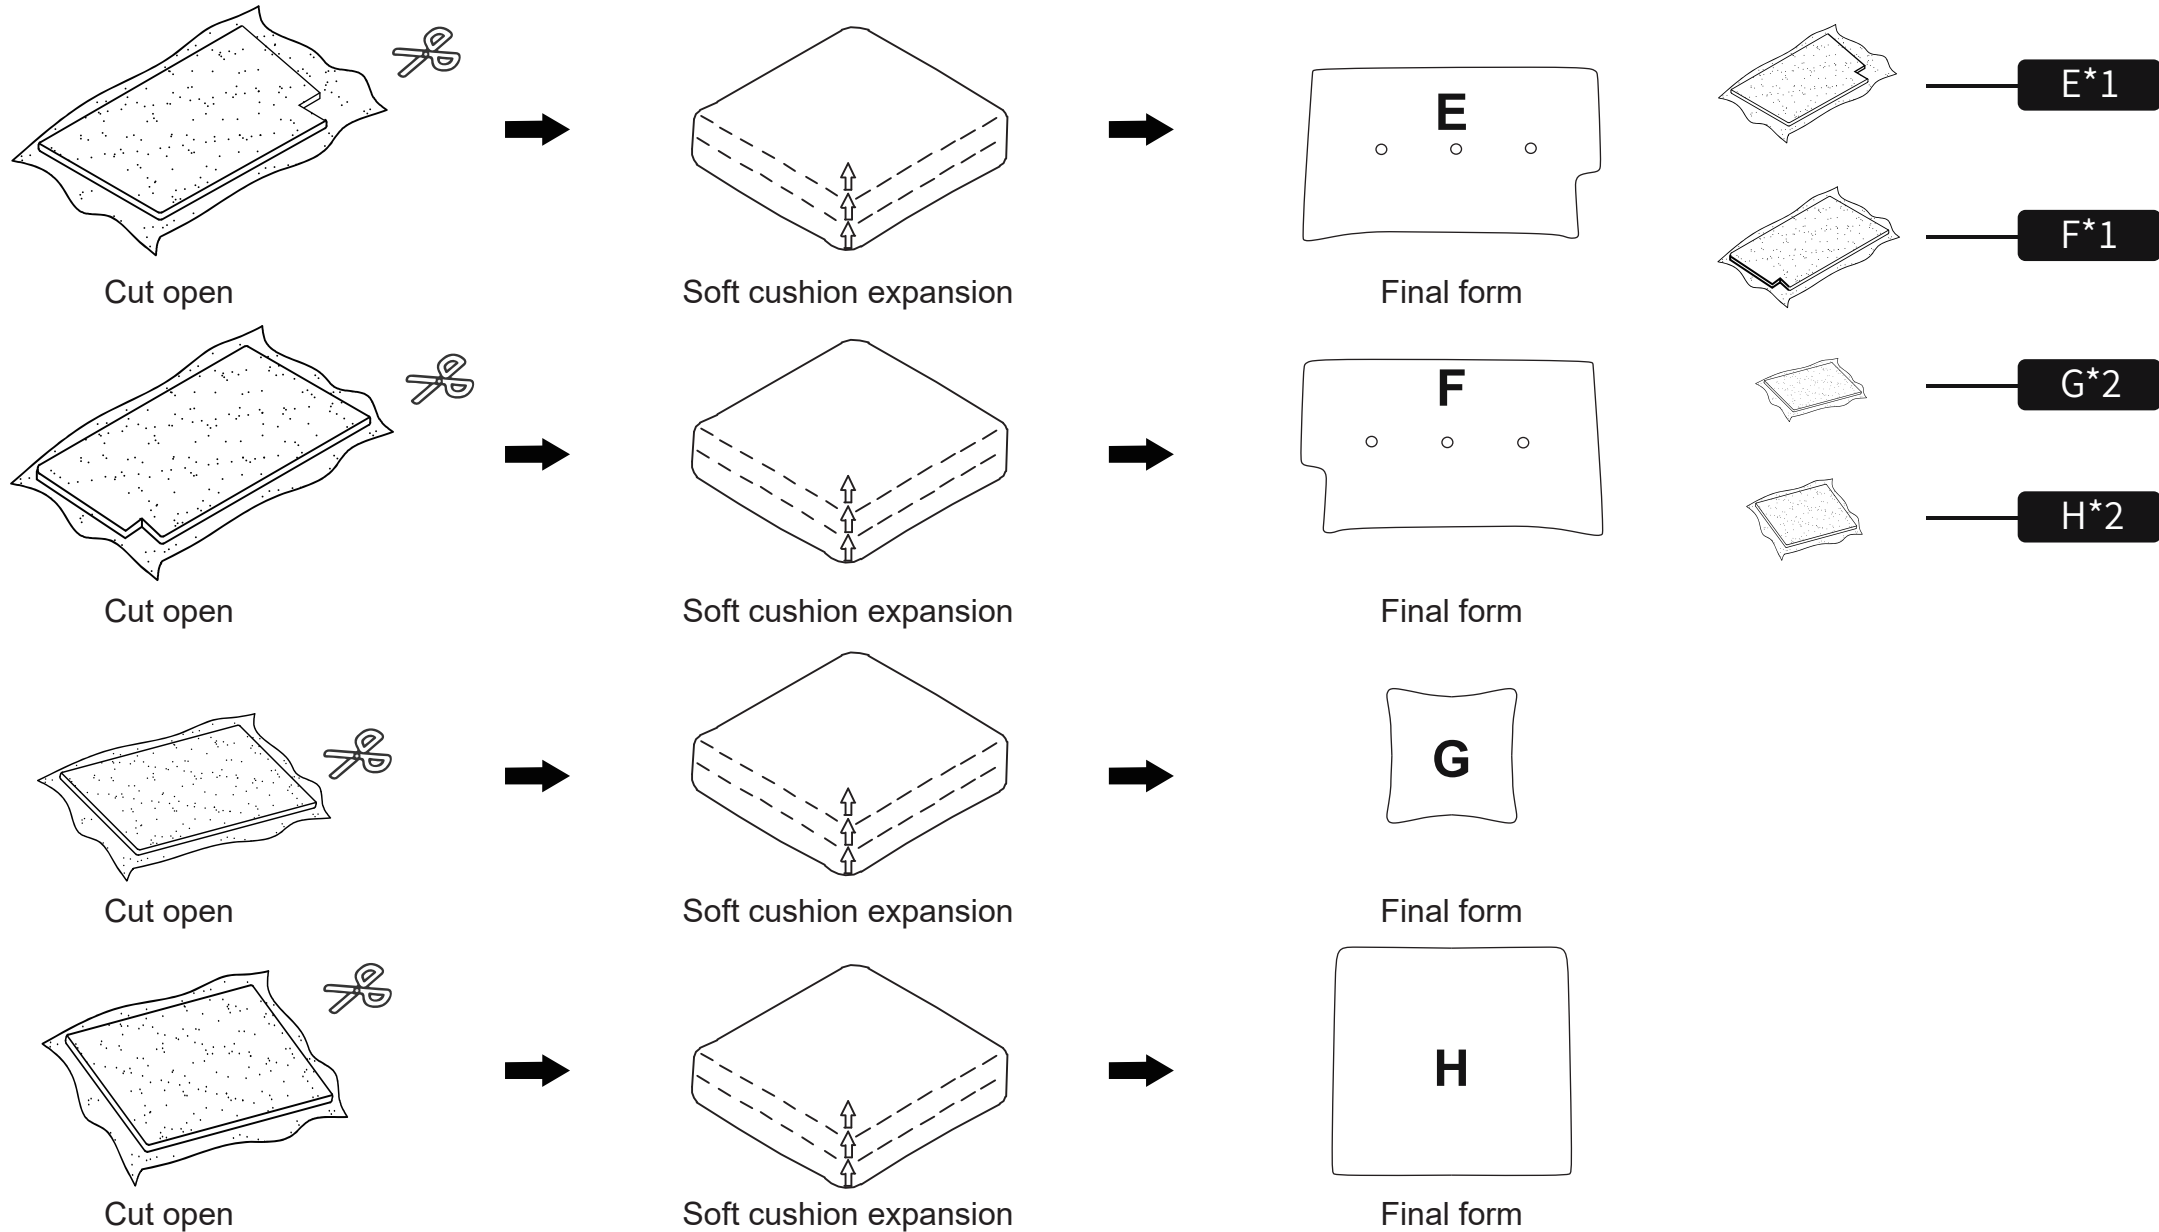Open the compression bags beforehand, and let them sit for a while until the foam has fully recovered. Then, put on the fabric covers before use (only the seat cushion needs a cover; the backrest and lumbar support do not require this step).




Installation Steps

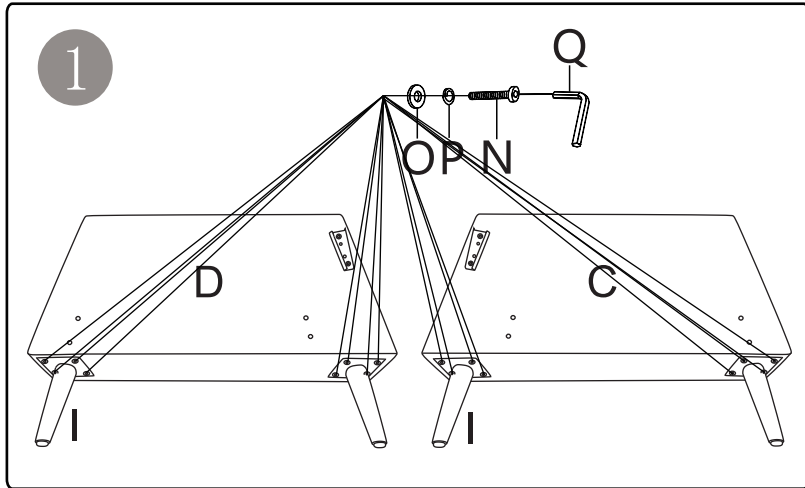


Install I the legs supports onto C and D

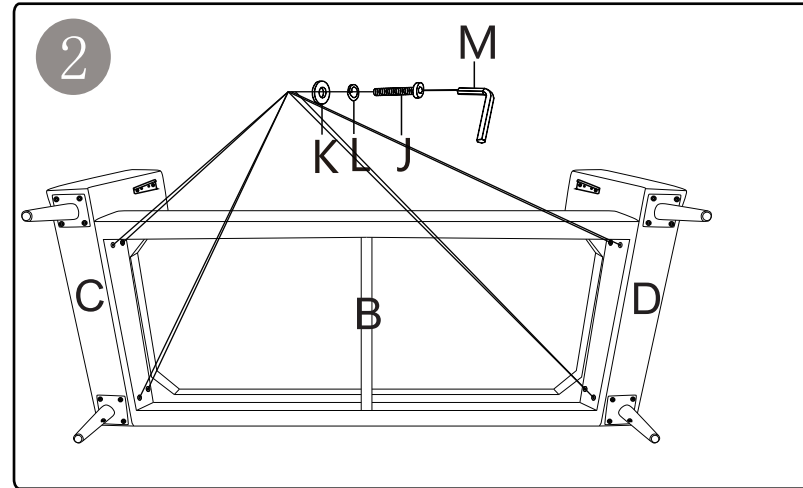
Note: The leg supports should be fixed in an outward and downward inclined position.



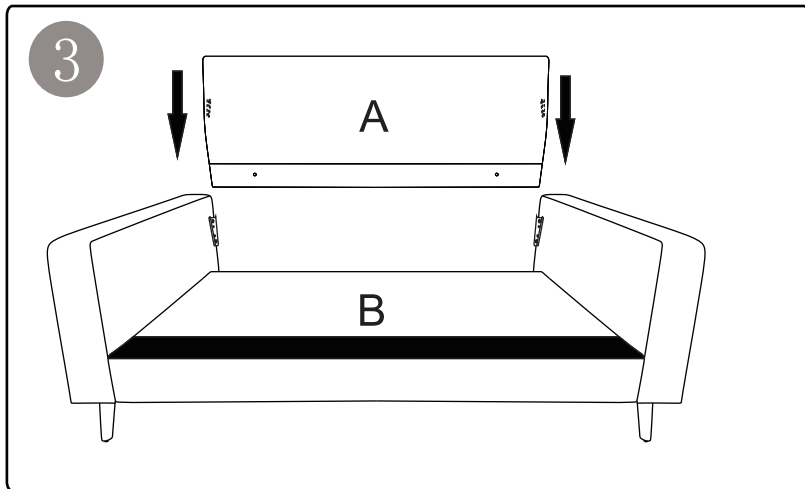Place the seat frame B flat, then sequentially attach the already assembled legs C and D components to the seat frame B.



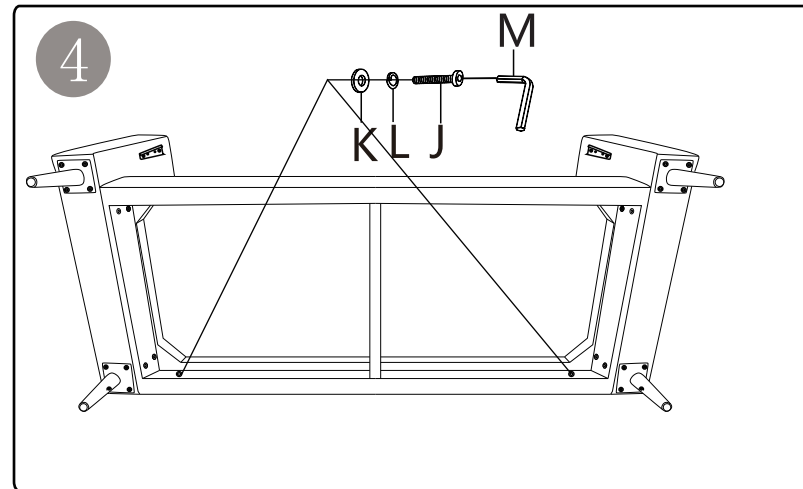Place seat frame B (with installed armrests) in position.
Align armrest A with the left and right track slots as shown, then snap it in from top to bottom until secure and stable.



Lay the sofa flat with backrest A installed, then tighten the screws securing backrest A to seat frame B.