


ARTISTICA®

— HOME —

ASSEMBLY INSTRUCTIONS

2003-877 Ringo Rectangular Dining Table

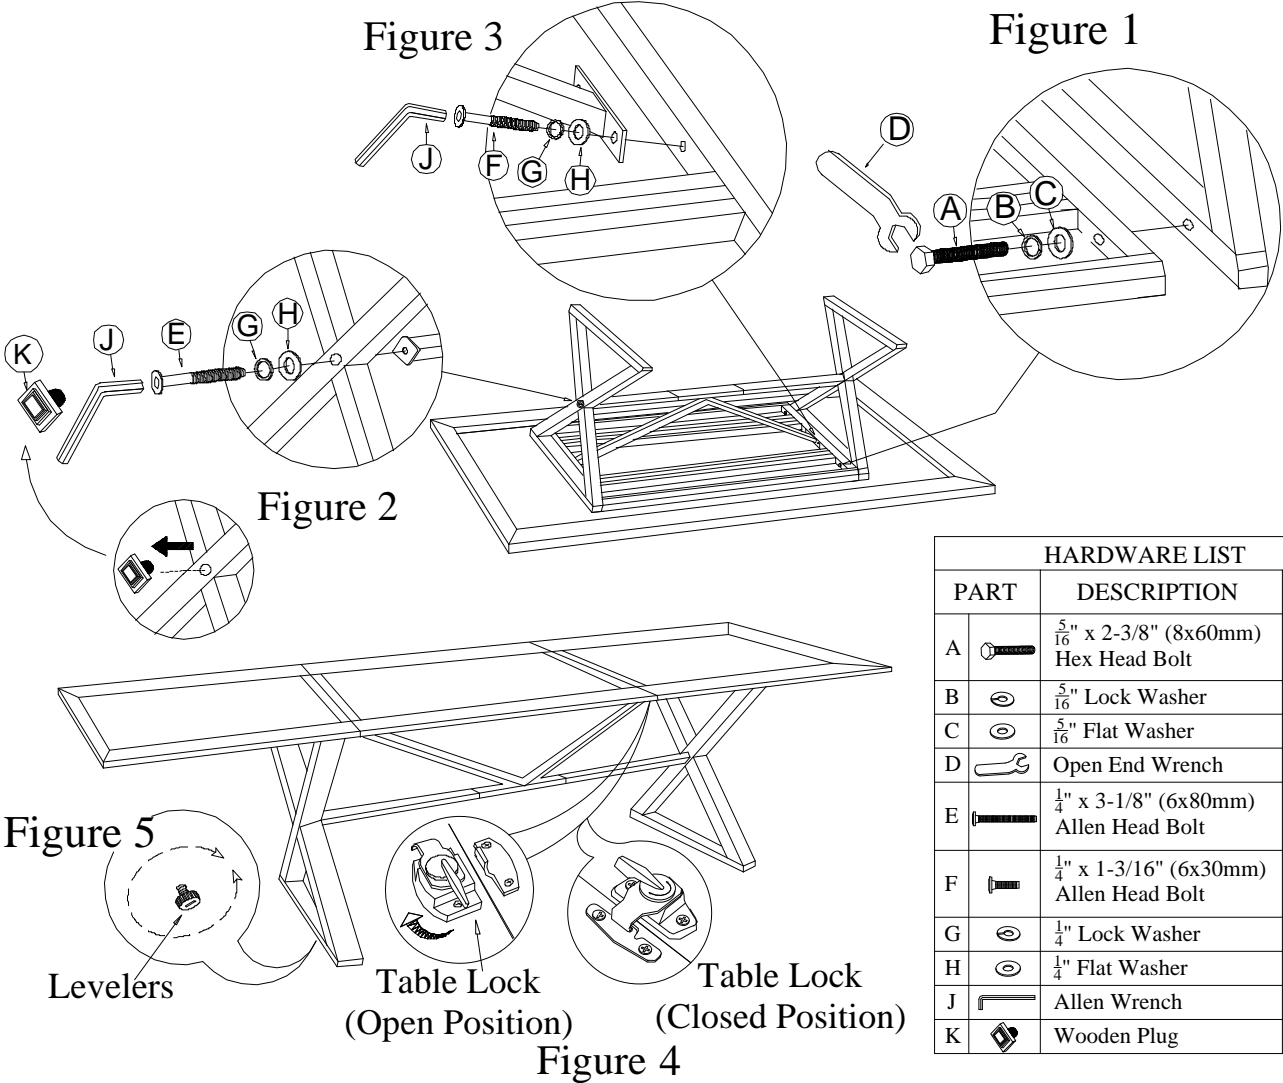

HARDWARE LIST			
PART		DESCRIPTION	QTY
A		$\frac{5}{16}$ " x 2-3/8" (8x60mm) Hex Head Bolt	4
B		$\frac{5}{16}$ " Lock Washer	4
C		$\frac{5}{16}$ " Flat Washer	4
D		Open End Wrench	1
E		$\frac{1}{4}$ " x 3-1/8" (6x80mm) Allen Head Bolt	2
F		$\frac{1}{4}$ " x 1-3/16" (6x30mm) Allen Head Bolt	4
G		$\frac{1}{4}$ " Lock Washer	6
H		$\frac{1}{4}$ " Flat Washer	6
J		Allen Wrench	1
K		Wooden Plug	2

ARTISTICA®

HOME

To Assemble Table:

1. Place table top upside-down on flat, clean, non-marring surface.
2. Insert one leg pedestal so that holes in pedestal align with holes on top.
3. Use Open End Wrench (D) to attach pedestal to top with (2) of each: 5/16" Flat Washers (C), 5/16" Lock Washers (B), and 5/16" x 2-3/8" Hex Head Bolts (A). Hand-tighten bolts. (*Figure 1*)
4. Repeat steps 2-3 for other pedestal.
5. Gently remove Wooden Plugs (K) from outside hole on X-cross on each pedestal. (Keep plugs for step 11.)
6. Position stretcher so that holes on flanges align with holes on inside of both pedestals.
7. Use Allen Wrench (J) to attach stretcher to one pedestal at X-cross on pedestal with (1) of each: 1/4" Flat Washer (H), 1/4" Lock Washers (G), and 1/4" x 3-1/8" Allen Head Bolts (E). Hand-tighten bolt. (*Figure 2*)
8. Repeat step 7 for other end of stretcher and X-cross on other pedestal.
9. Use Allen Wrench (J) to attach stretcher to pedestals at table top with (4) of each: 1/4" Flat Washers (H), 1/4" Lock Washers (G), and 1/4" x 1-3/16" Allen Head Bolts (F). Hand-tighten bolts. (*Figure 3*)
10. Fully tighten all bolts from all steps.
11. Gently press (1) Wooden Plug (K) into hole on outside of X-cross on each pedestal to cover bolt head. Design on plug should be oriented so that design is in shape of a diamond as shown in *Figure 2*.
12. Return assembled bench to its upright position and place in desired location.
13. There are Adjustable Levelers on the bottom of each pedestal. Rotate leveler clockwise to raise and counter-clockwise to lower. (*Figure 5*)

To Attach Leaf:

1. Open table locks on underside of table, located between half-tops on each side. (*Figure 4*)
2. Pull on one end of table to separate half-tops. Open table enough to insert leaf.
3. Place table leaf between half-tops so that pins on leaves align with holes on half-tops.
4. Push table on each end until fully closed.
5. Close table locks on underside of table between each leaf and half-top.