


# BATHROOM MIRROR CABINET WITH LIGHTS AND DEFOGGER

## User Manual

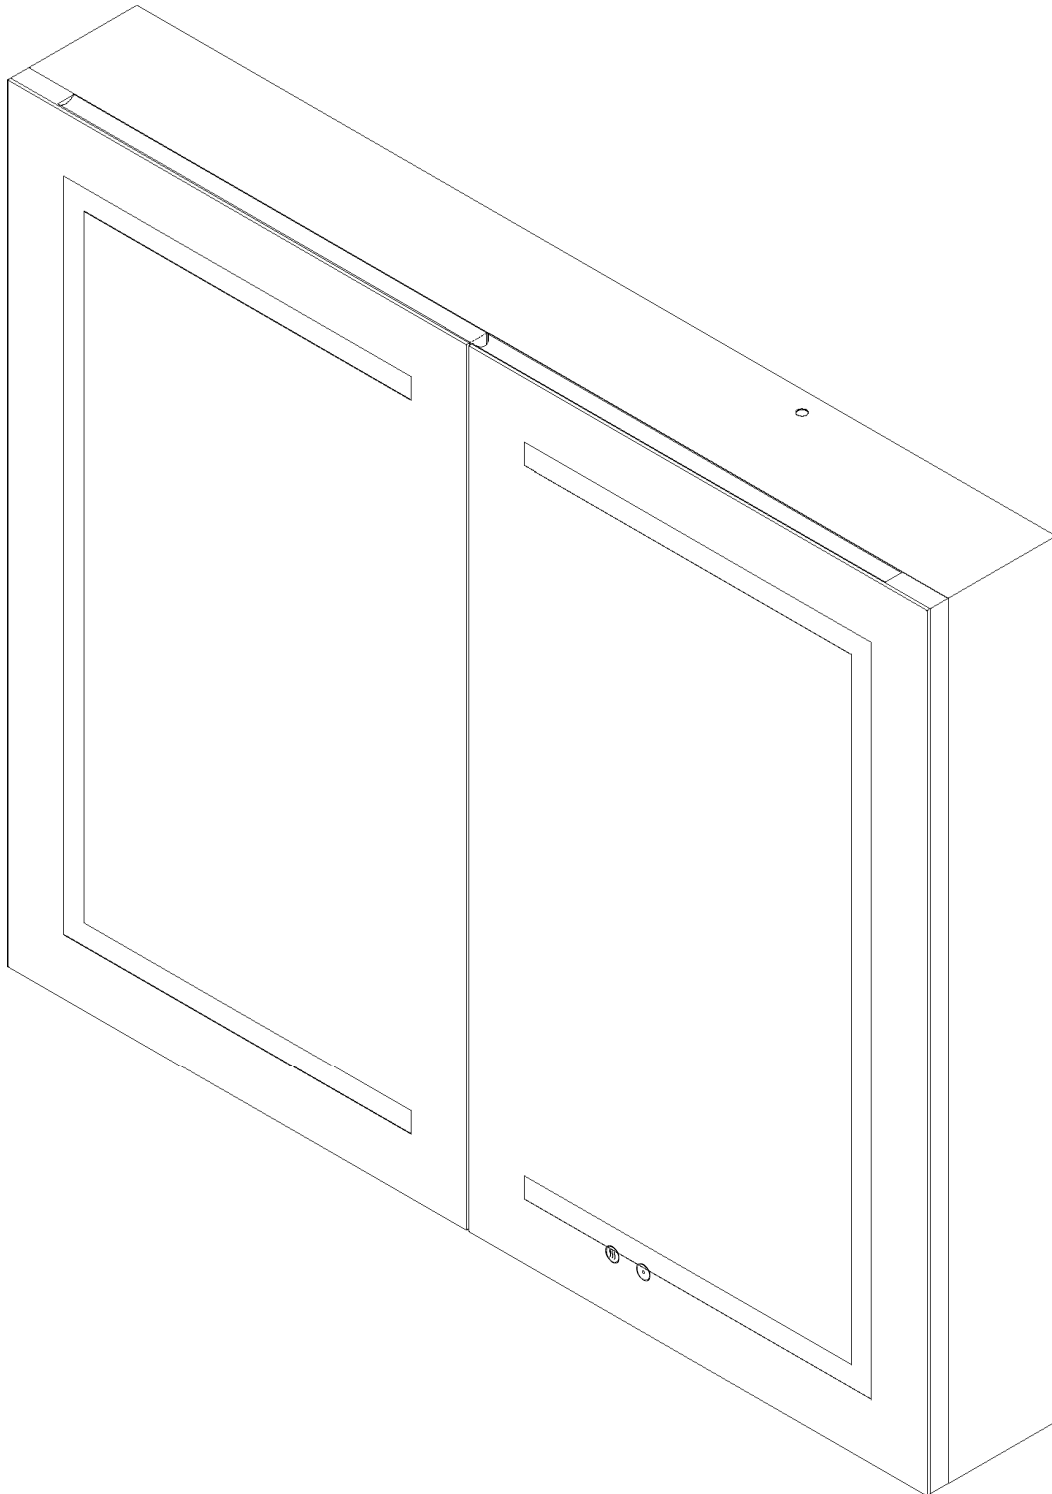

## USE AND CLEANING INSTRUCTION

In order to keep the LED mirror look perfectly, we suggest using and cleaning the mirror regularly.

1. Please use in safe voltage range. (110V-120V)
2. Use electrical tape to wrap around the wires to prevent leakage.
3. Do not strike mirror glass with hard or pointed items.

**Please obey the following procedure when you clean the mirror.**

1. It is recommended that the product is cleaned with a soft, nonabrasive cloth.
2. Do not use Irritating cleaning agents or abrasive materials on any type of finished surface. Please use the any following cleanser to remove the dirt.

Gentle liquid detergent.

Colorless cleanser.

## BEFORE INSTALLATION

**Thank you very much for using our products, in order to facilitate the use, please read this instruction carefully before you begin installation.**

1. Important Safety Instructions:

- Please read all instructions carefully before assembling the item.
- Assembly by two or more adults is highly recommended.
- To connect the wires to electrical junction box, a qualified technician or electrician is highly recommended.
- Disconnect power before installing, adding or changing any components.
- Ensure that the fixing location is able to take the weight of the complete fitting. (solid stone / brick walls).
- To prevent injury, the mirror must be installed according to these instructions.

2. Pre-assembly:

After opening the package, inspect the product immediately upon receipt for transit damage or missing parts.

Keep the voltages between 110V and 120V. If the voltage exceeds 120V, please use transformer.

You can connect the wires directly to your junction box or the plug.

Do not remove the transparent silicone protector before completing the installation.

# OPERATION INSTRUCTION

## 1. ON/OFF/Switch-color Function

- 1) When the power is on, the button lights up and turns white. Long press to light off button when not use. The button turns and stays blue when the mirror is off .
- 2) Short press the button to turn on/off the light. When the light is on, press consecutively to adjust the color temperature; After staying at one color temperature for more than 3 seconds, the next click will directly turn off the light.

## 2. Dimmer Function




- 1) Press the ON/OFF button and hold on for a few seconds to activate the dimmer function. Finish setting by withdrawing your finger when brightness reaches the level you need.

## 3. Anti-fog Function

- 1) Mirror begins to get warm and defog after pressing the defogger button. Press again to exit the anti-fog function. It takes 15 minutes for the mirror to heat up to reach a temperature that can effectively prevent water vapor from condensing on the surface of the mirror. It is recommended that you turn it on in advance.
- 2) When you are not using it, remember to turn off the switch to prevent wasting energy.
- 3) Anti-fog function will automatically turn off after working for an hour to avoid long time heating. During the defogging process, turning the lights on/off will reset the defogging timer auto-off function, and automatically turn off after the next hour.


## 4. Connect the power

- 1) There are three power wires behind the mirror, including the live wire (black), the neutral wire (white) and the ground wire (green). You can connect the wires to standard switched lighting circuit or plug. If you want to connect power wires to plug, you can refer to the steps:
- 2) Remove the plug cover.
- 3) Unscrew the screws on each of the plug's pins.
- 4) Insert the twisted copper wires into the holes in the pins.
- 5) Tighten the little screw on each of the plug's pins.
- 6) Make sure the wire is tightly clamped by the brake or clip.
- 6) Replace the cover of the plug


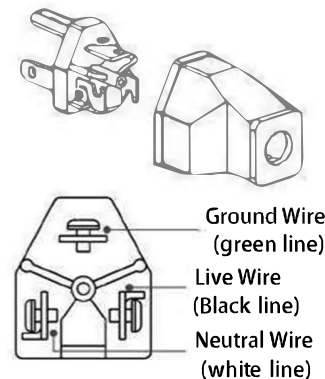


Other power connection methods are on the same principle

## PACKING LIST

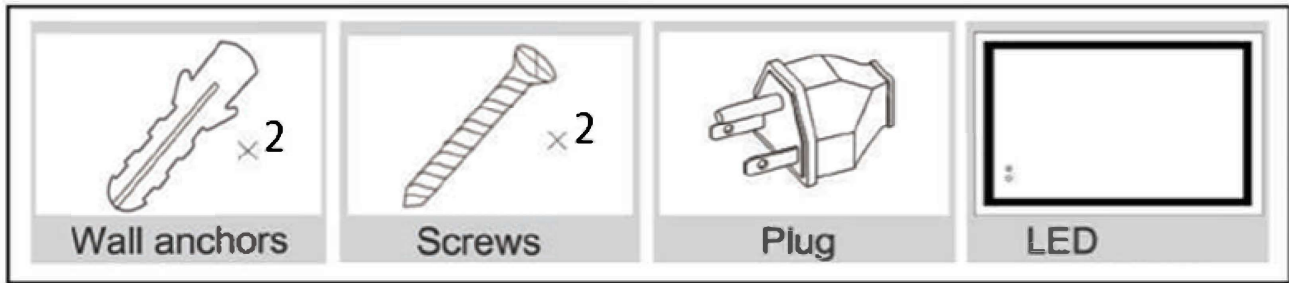

## PRODUCT DESCRIPTION

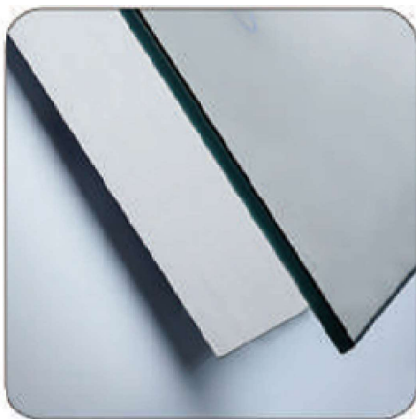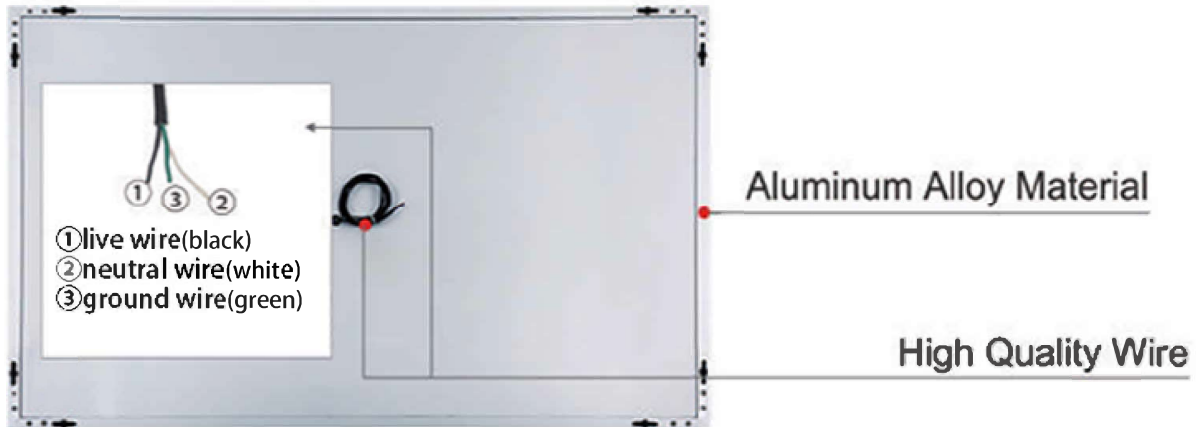


5mm Quality Mirror



Water-proof design

## Tools Needed



Tape measure



Electric drill



Hammer



Screwdriver

## Assembly Instructions

● are punch points



1. Please make sure the wall can bear the weight of the cabinet.




2. Measure and mark the distance of the hook behind the cabinet.



3. Drill holes at the marks with an electric drill.



4. Drive the plastic dowels into the holes with a hammer.




5. Align the plastic dowels with holes behind the cabinet, and fix the cabinet on the wall with screws.



6. Plug it in then done.

## 5.Adjustable glass shelves

1) The shelves can be adjusted easily according to the height of the bottles of cosmetics, skin care products and cleaning products you use.you can adjust the distance of the glass shelf by loose the 4 screws Easily organize the items as you need.



Unscrew the plastic screws at the bottom of the glass shelf, disassemble or adjust the shelf.