









small animal hutch with outdoor run		155 × 70 × 53 cm		
Pos. No.	Description	Measurement	Quantity	
Pos. 1	Upper front panel 	700 × 378 × 25 mm	1	
Pos. 2	Bottom front and back panel 	700 × 245 × 25 mm	2	
Pos. 3	Left side panel 	25 × 610 × 480 mm	1	
Pos. 4	Right side panel 	25 × 610 × 480 mm	1	
Pos. 5	Upper back panel 	700 × 421 × 25 mm	1	
Pos. 6	Partition 	15 × 305 × 428 mm	1	
Pos. 7	Drawer with plastic inlay 	697 × 38 × 453 mm	1	
Pos. 8	Roof plate, left Roof plate, right 	421 × 18 × 530 mm	1/1	
Pos. 9	Ramp 	604 × 20 × 180 mm	1	
Pos. 10	Front and back panel, enclosure 	750 × 535 × 25 mm	2	
Pos. 11	Side panel, enclosure, right 	25 × 535 × 430 mm	1	
Pos. 12	Upper panel, enclosure 	750 × 25 × 480 mm	1	
Pos. 13	Roof ridge 	69 × 45 × 556 mm	1	


Small parts				
A	Countersunk screw 	M4 × 50	26/1	
B		M4 × 25	3/1	
C		M3 × 18	12/1	
D		M3 × 16	34/1	
	Connection hooks 		4	
	Check strap for roof left/right 		1/1	

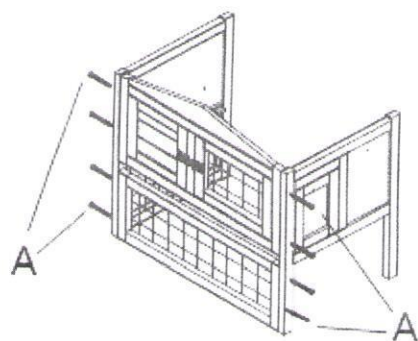


1. Connect the both front parts with the side panels.

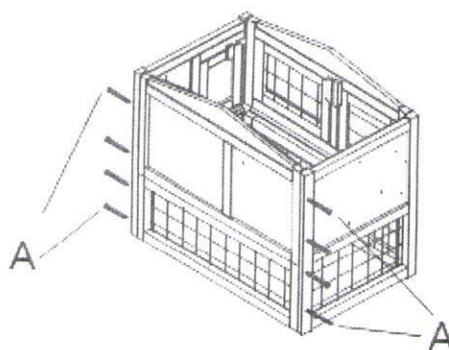


2. Now screw together back walls and side panels.

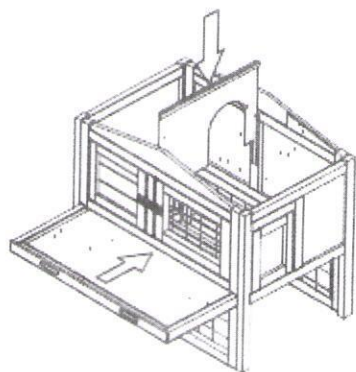


3. Insert the drawer with plastic inlay and the partition.

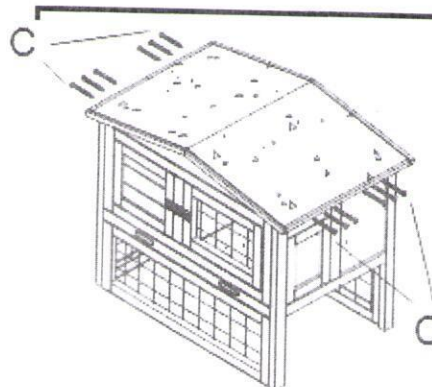


4. Fasten the roof plates with the hinges.

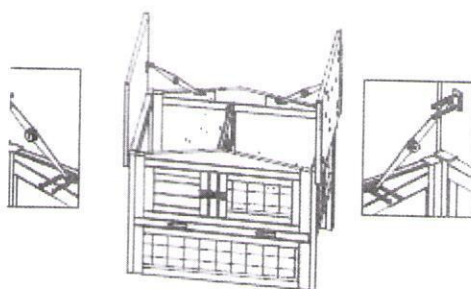


5. Screw the check straps (screws D)

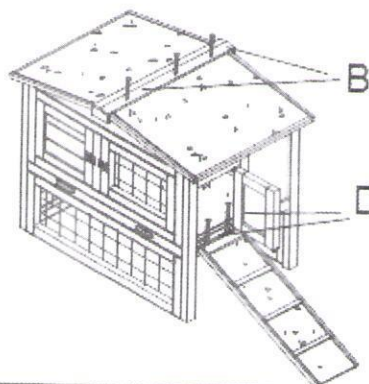

6. Fasten the roof ridge as well as the ramp.

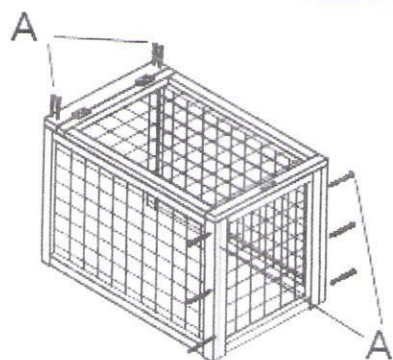

7. Assemble the enclosure.

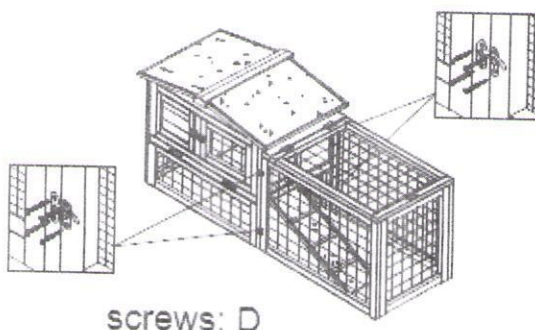

8. Screw the connection hooks for connecting the enclosure with the hutch.

screws: D