



Maxstow® | K-81147-SLE

17" x 40" lighted medicine cabinet

Features

- Side-integrated LED lighting provides optimally bright bathroom vanity lighting for grooming tasks.
- Brightness at 1900 lumens ensures consistent lighting with no hot spots or dark spots. Produces 88 lumens per watt
- Approx. 3000 Kelvin light appearance delivers a neutral light ideal for overall bathroom aesthetics as well as tasks
- Minimum 90 CRI (color rendering index) lets you see yourself in the truest light for makeup application, grooming, and skin care
- Integrated LED bulbs have an estimated life expectancy of 50,000 hours
- Compatible with wall-mount LED dimmers (not included), which allow you to control lighting from multiple locations in the space
- Innovative staggered shelf layout fits tall and short items
- Five fixed shelves—three full width, two partial
- Internal shelf features electrical outlet for powering small devices such as toothbrushes or razors
- Holds optional Moxie® speaker charging dock (K-81106); speaker and charging dock sold separately
- Low-profile design hugs the wall for a clean look
- Front mirror, inside door mirror, and back panel mirror provide superior visibility to make grooming easier
- Two-way adjustable hinges with 108° opening capability for easy cabinet access



Available Colors/Finishes

Color tiles intended for reference only.

■ DA1 Dark Anodized Aluminum



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-31-2026 19:03 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

UL 962
CSA C22.2 No. 0
CA Title 24 JA8
cUL Listed
UL Listed

Technical Information

All product dimensions are nominal.

Lighting Included:	Yes
Mirror Type:	Polished Edge
Cutout	
Width:	17" (432 mm)
Depth:	3-7/8" (98 mm)

Material

- Rustproof aluminum

Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Lights:	120 V, 5 A, 60 Hz
---------	-------------------

Electrical Component Ratings


LED:	120 V, 5 A, 60 Hz, 1200 Lumens
------	--------------------------------

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



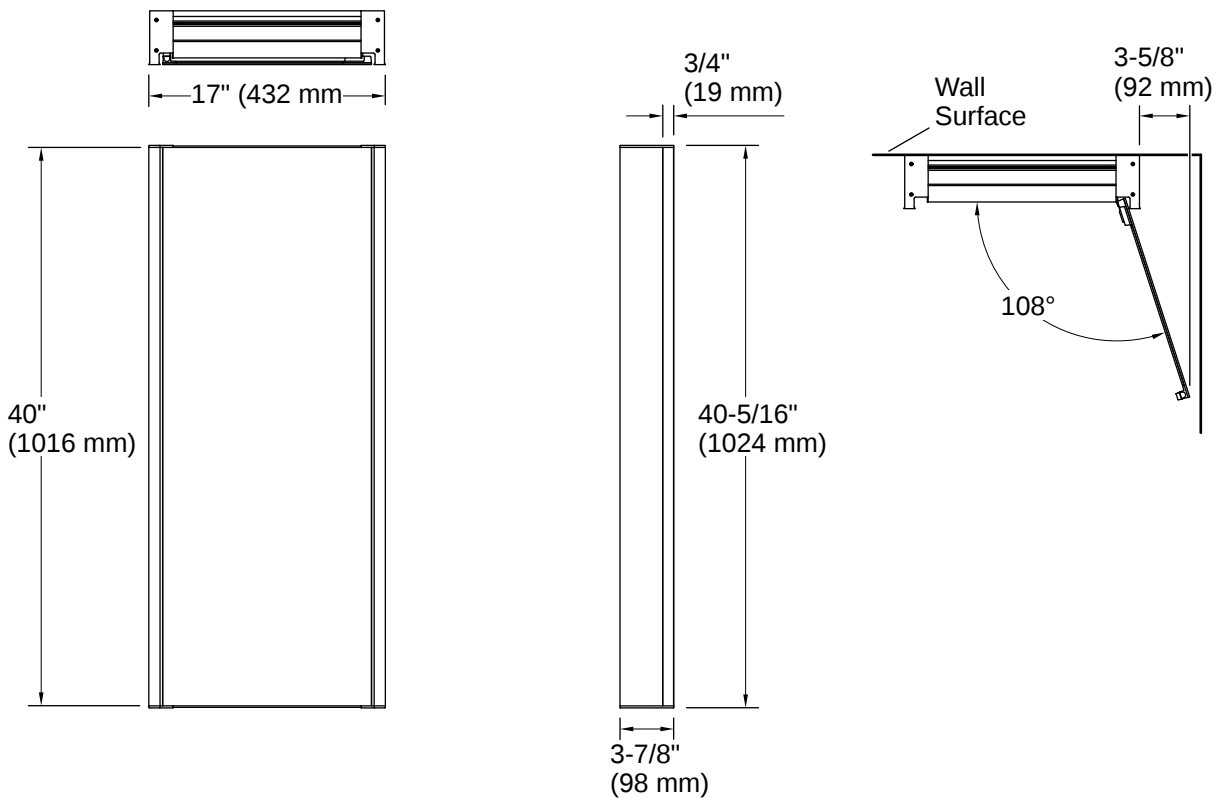

Installation

- Easy surface-mount installation—no wall cutting
- Reversible: install as left- or right-hinge swing
- Includes mounting hardware

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-31-2026 19:03 - US-CA