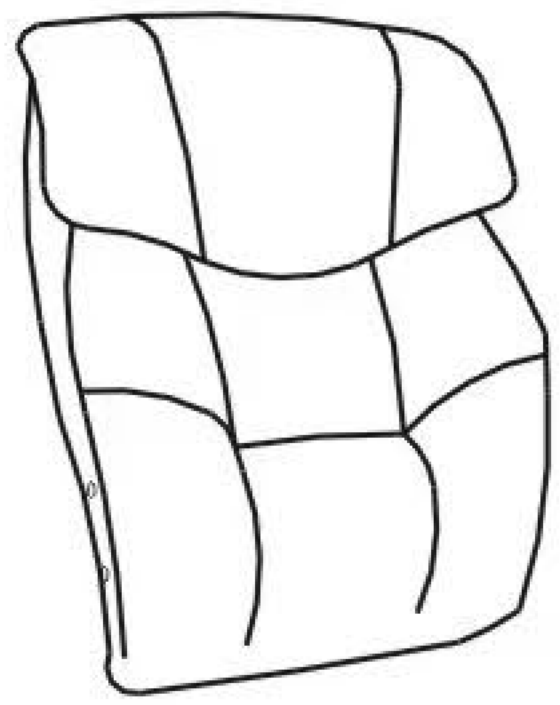
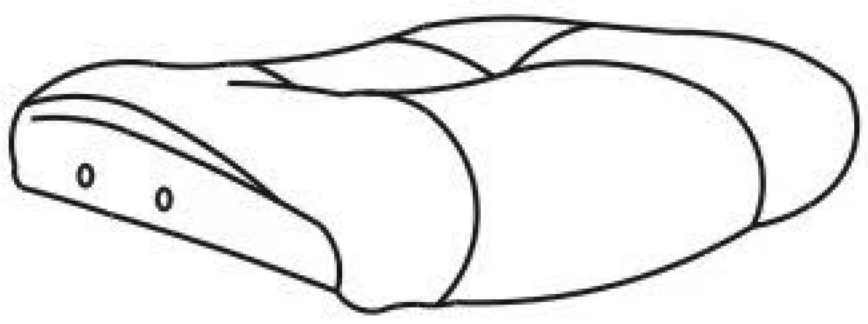
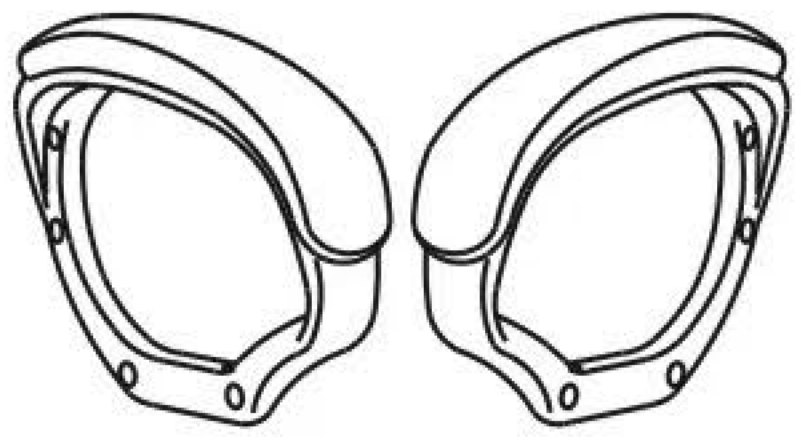
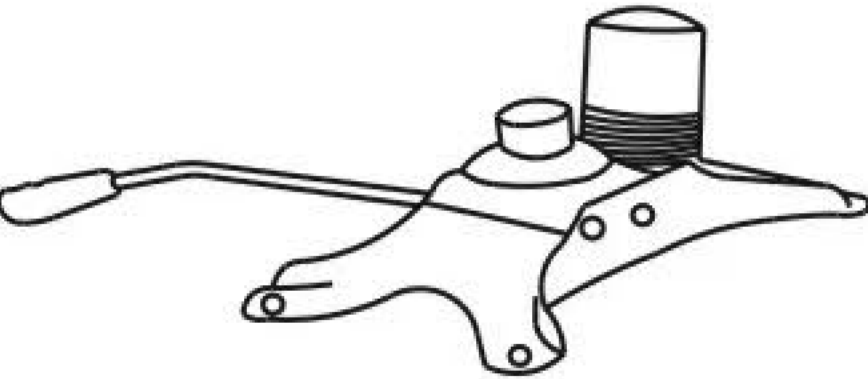
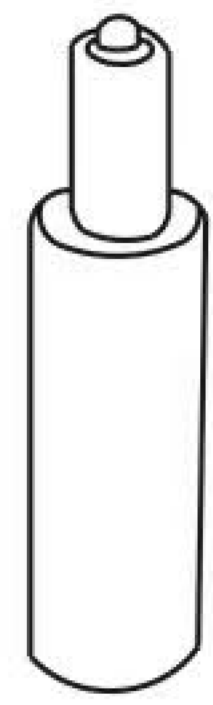
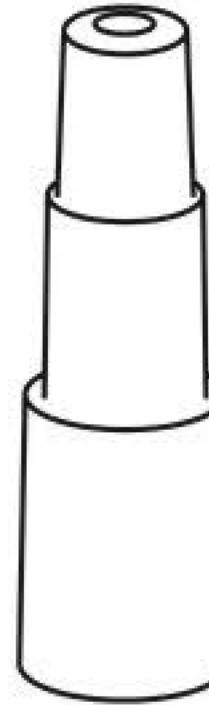
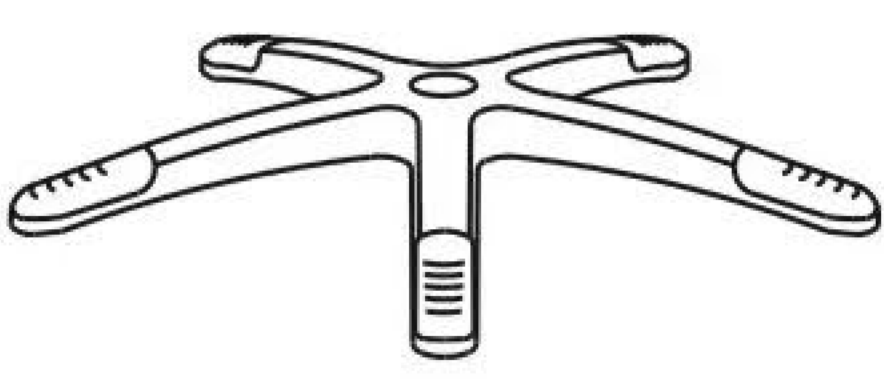
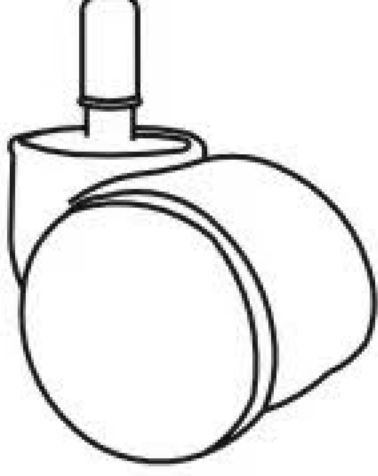
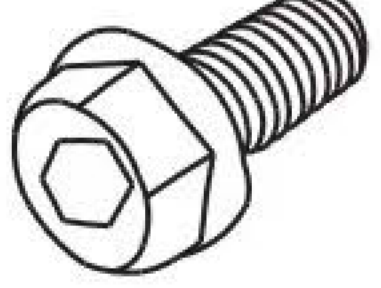
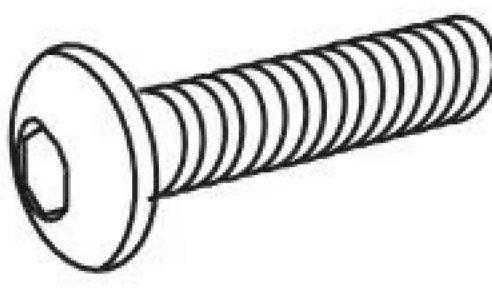


ASSEMBLY INSTRUCTION

 1	 2	 3	 4	 5	 6
 7	 5PCS 8	 M6*20 4PCS A	 M6*20 8PCS B	 8PCS C	

1

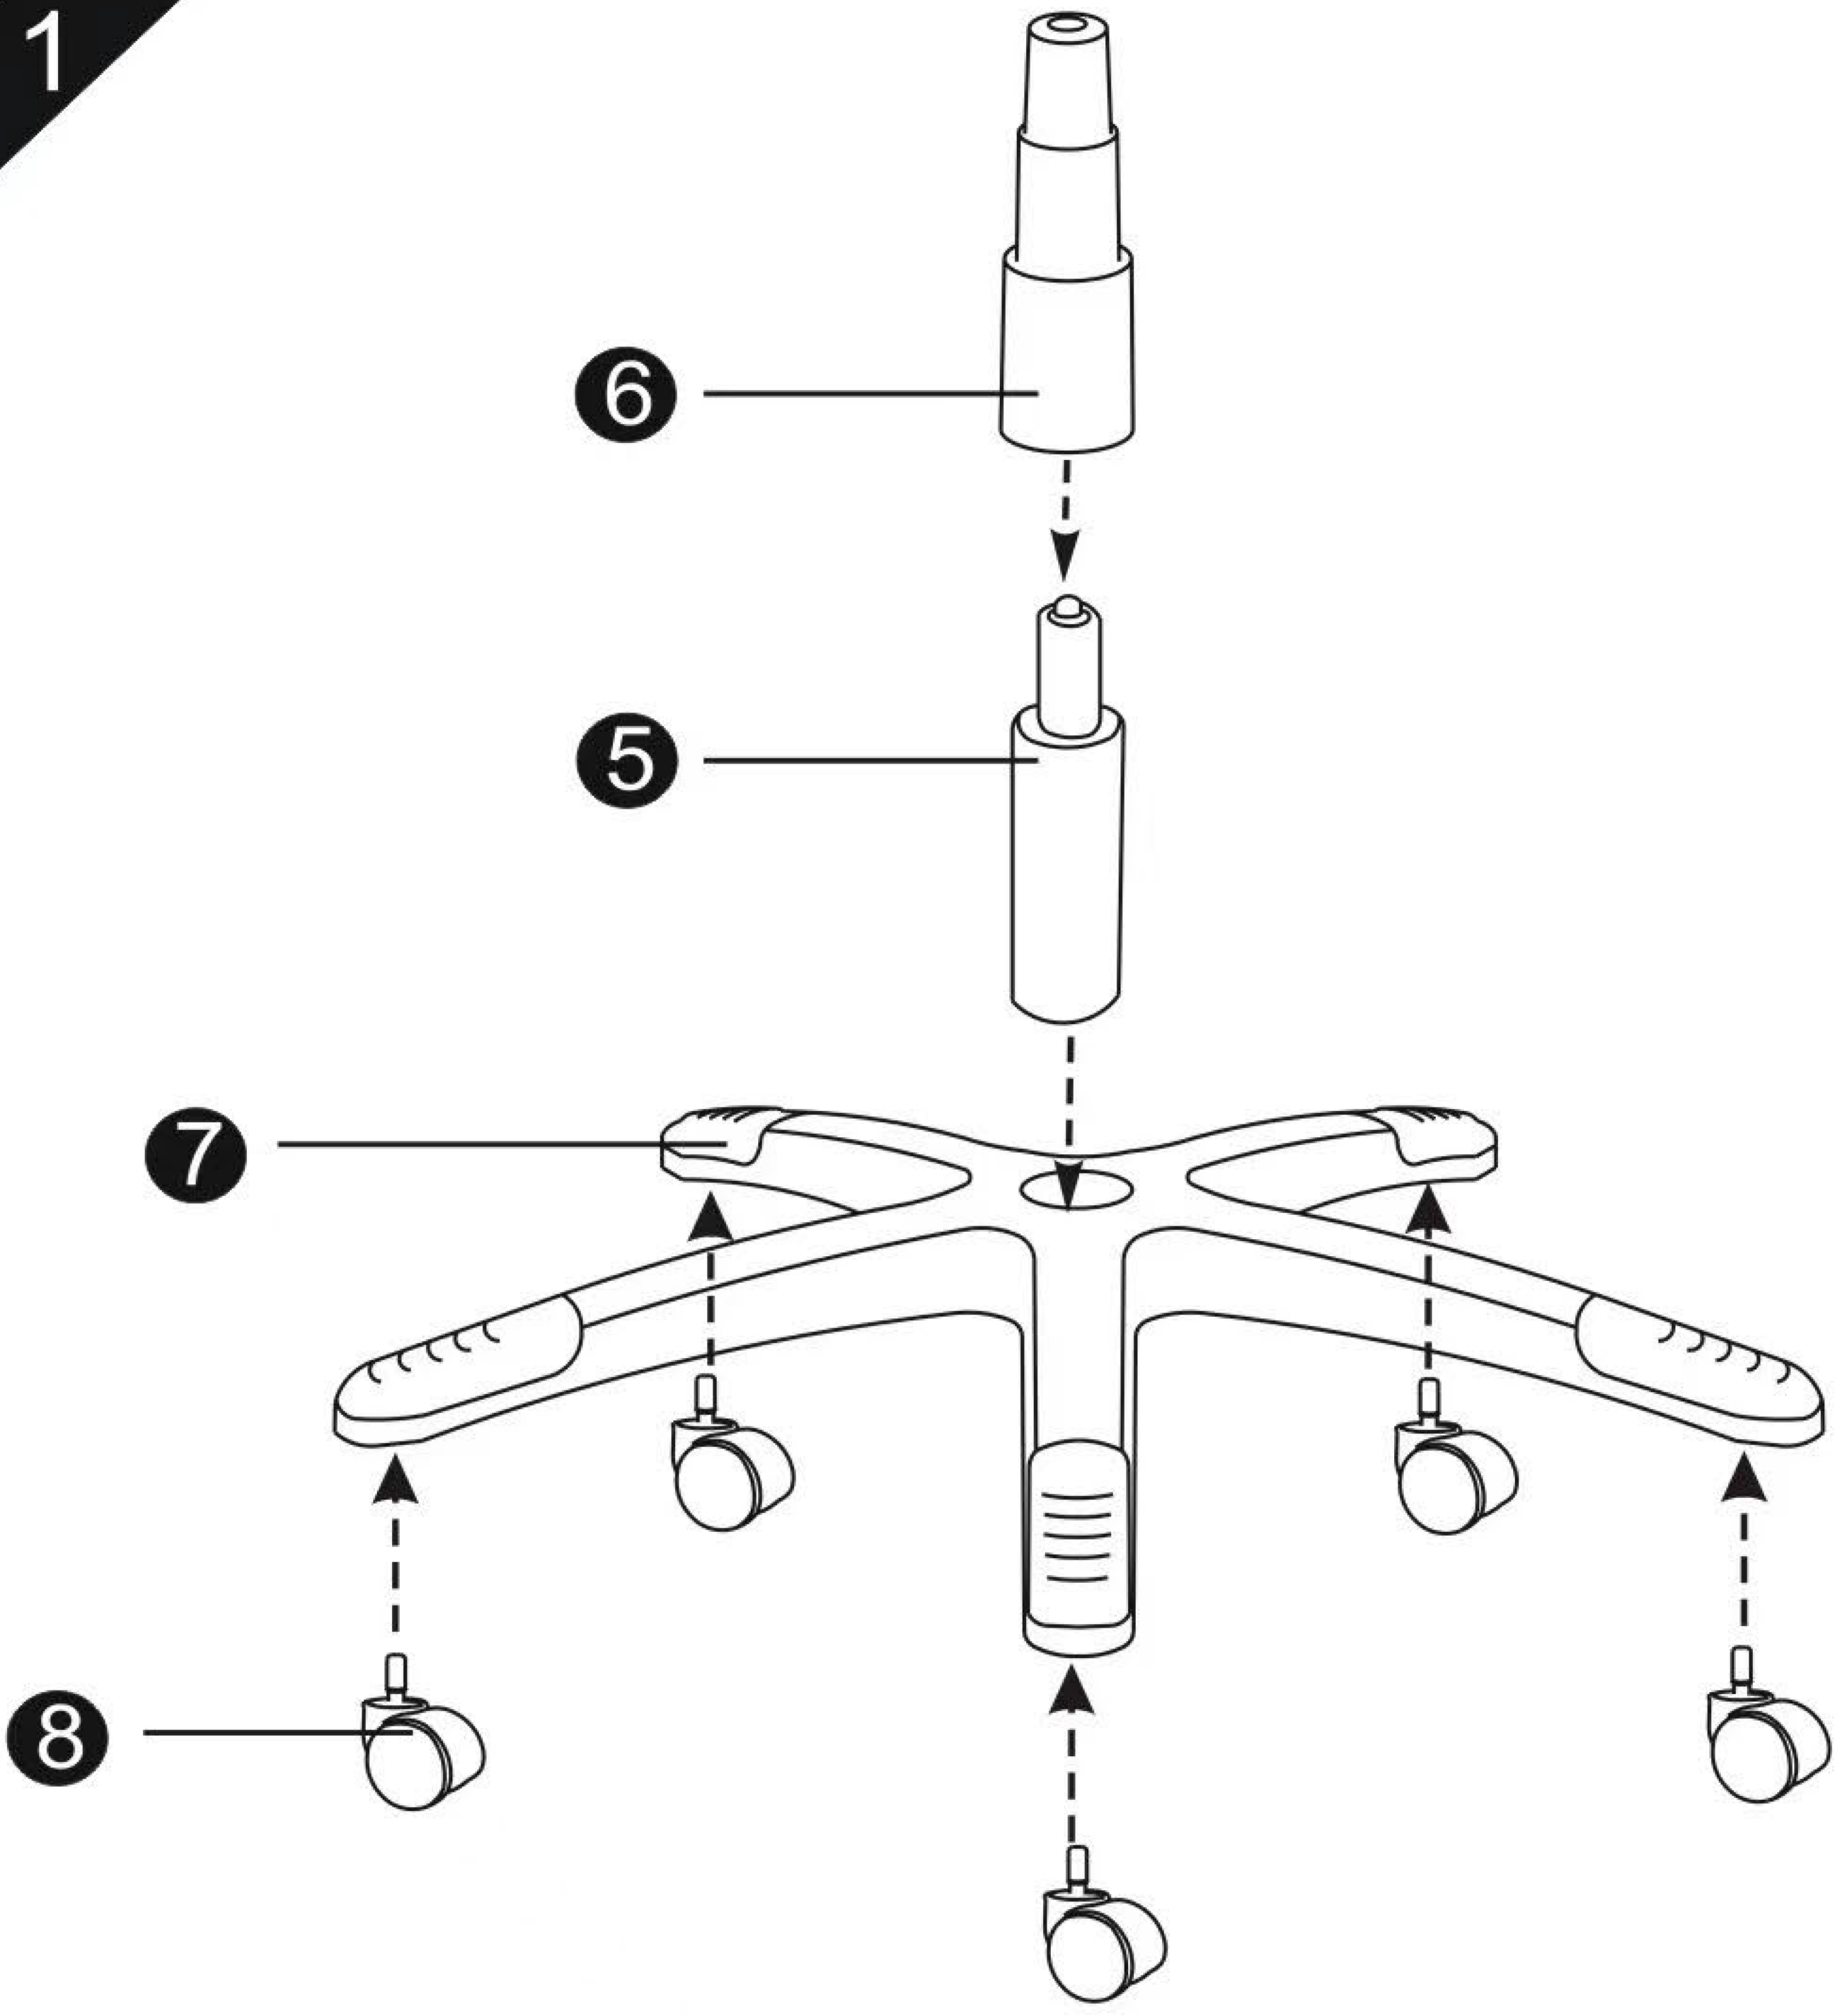


Diagram 1 shows the assembly of the seat and backrest tubes (6 and 5) into the five-point base (7). The casters (8) are shown being attached to the base.

2

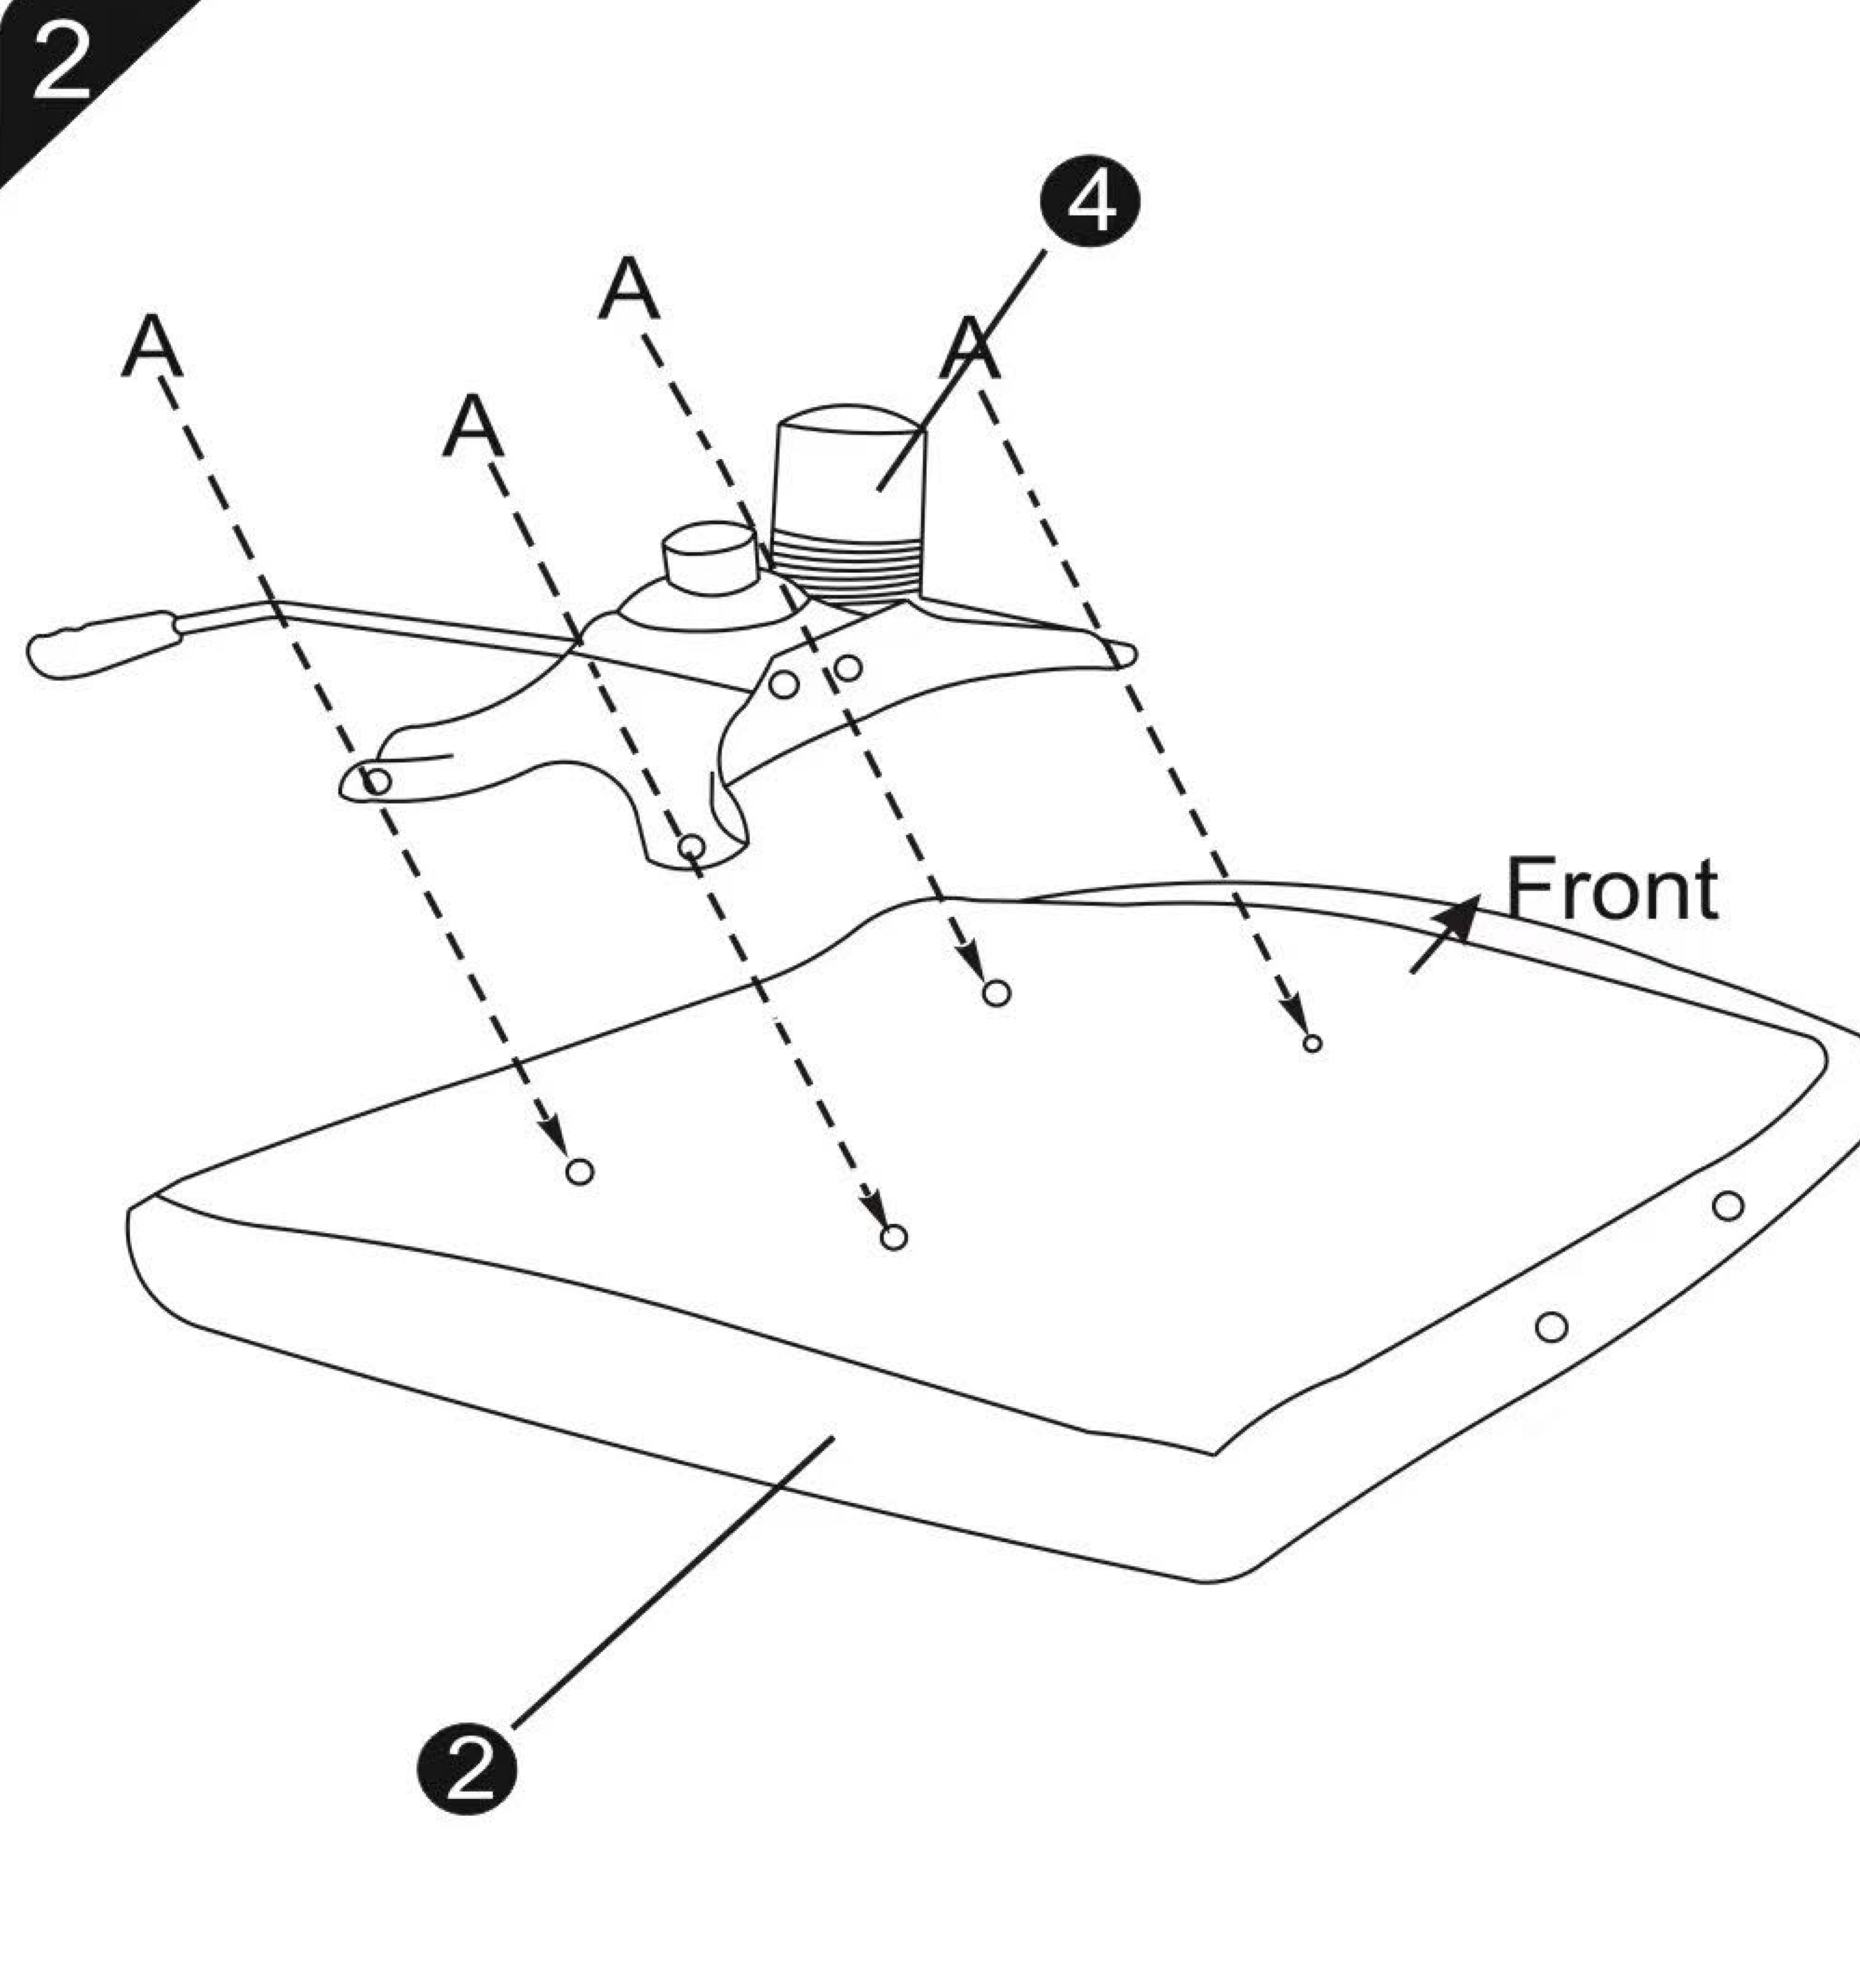


Diagram 2 shows the base plate (4) being attached to the seat cushion (2) using the hex bolts (A) and washers (C). The front of the seat is indicated.

3

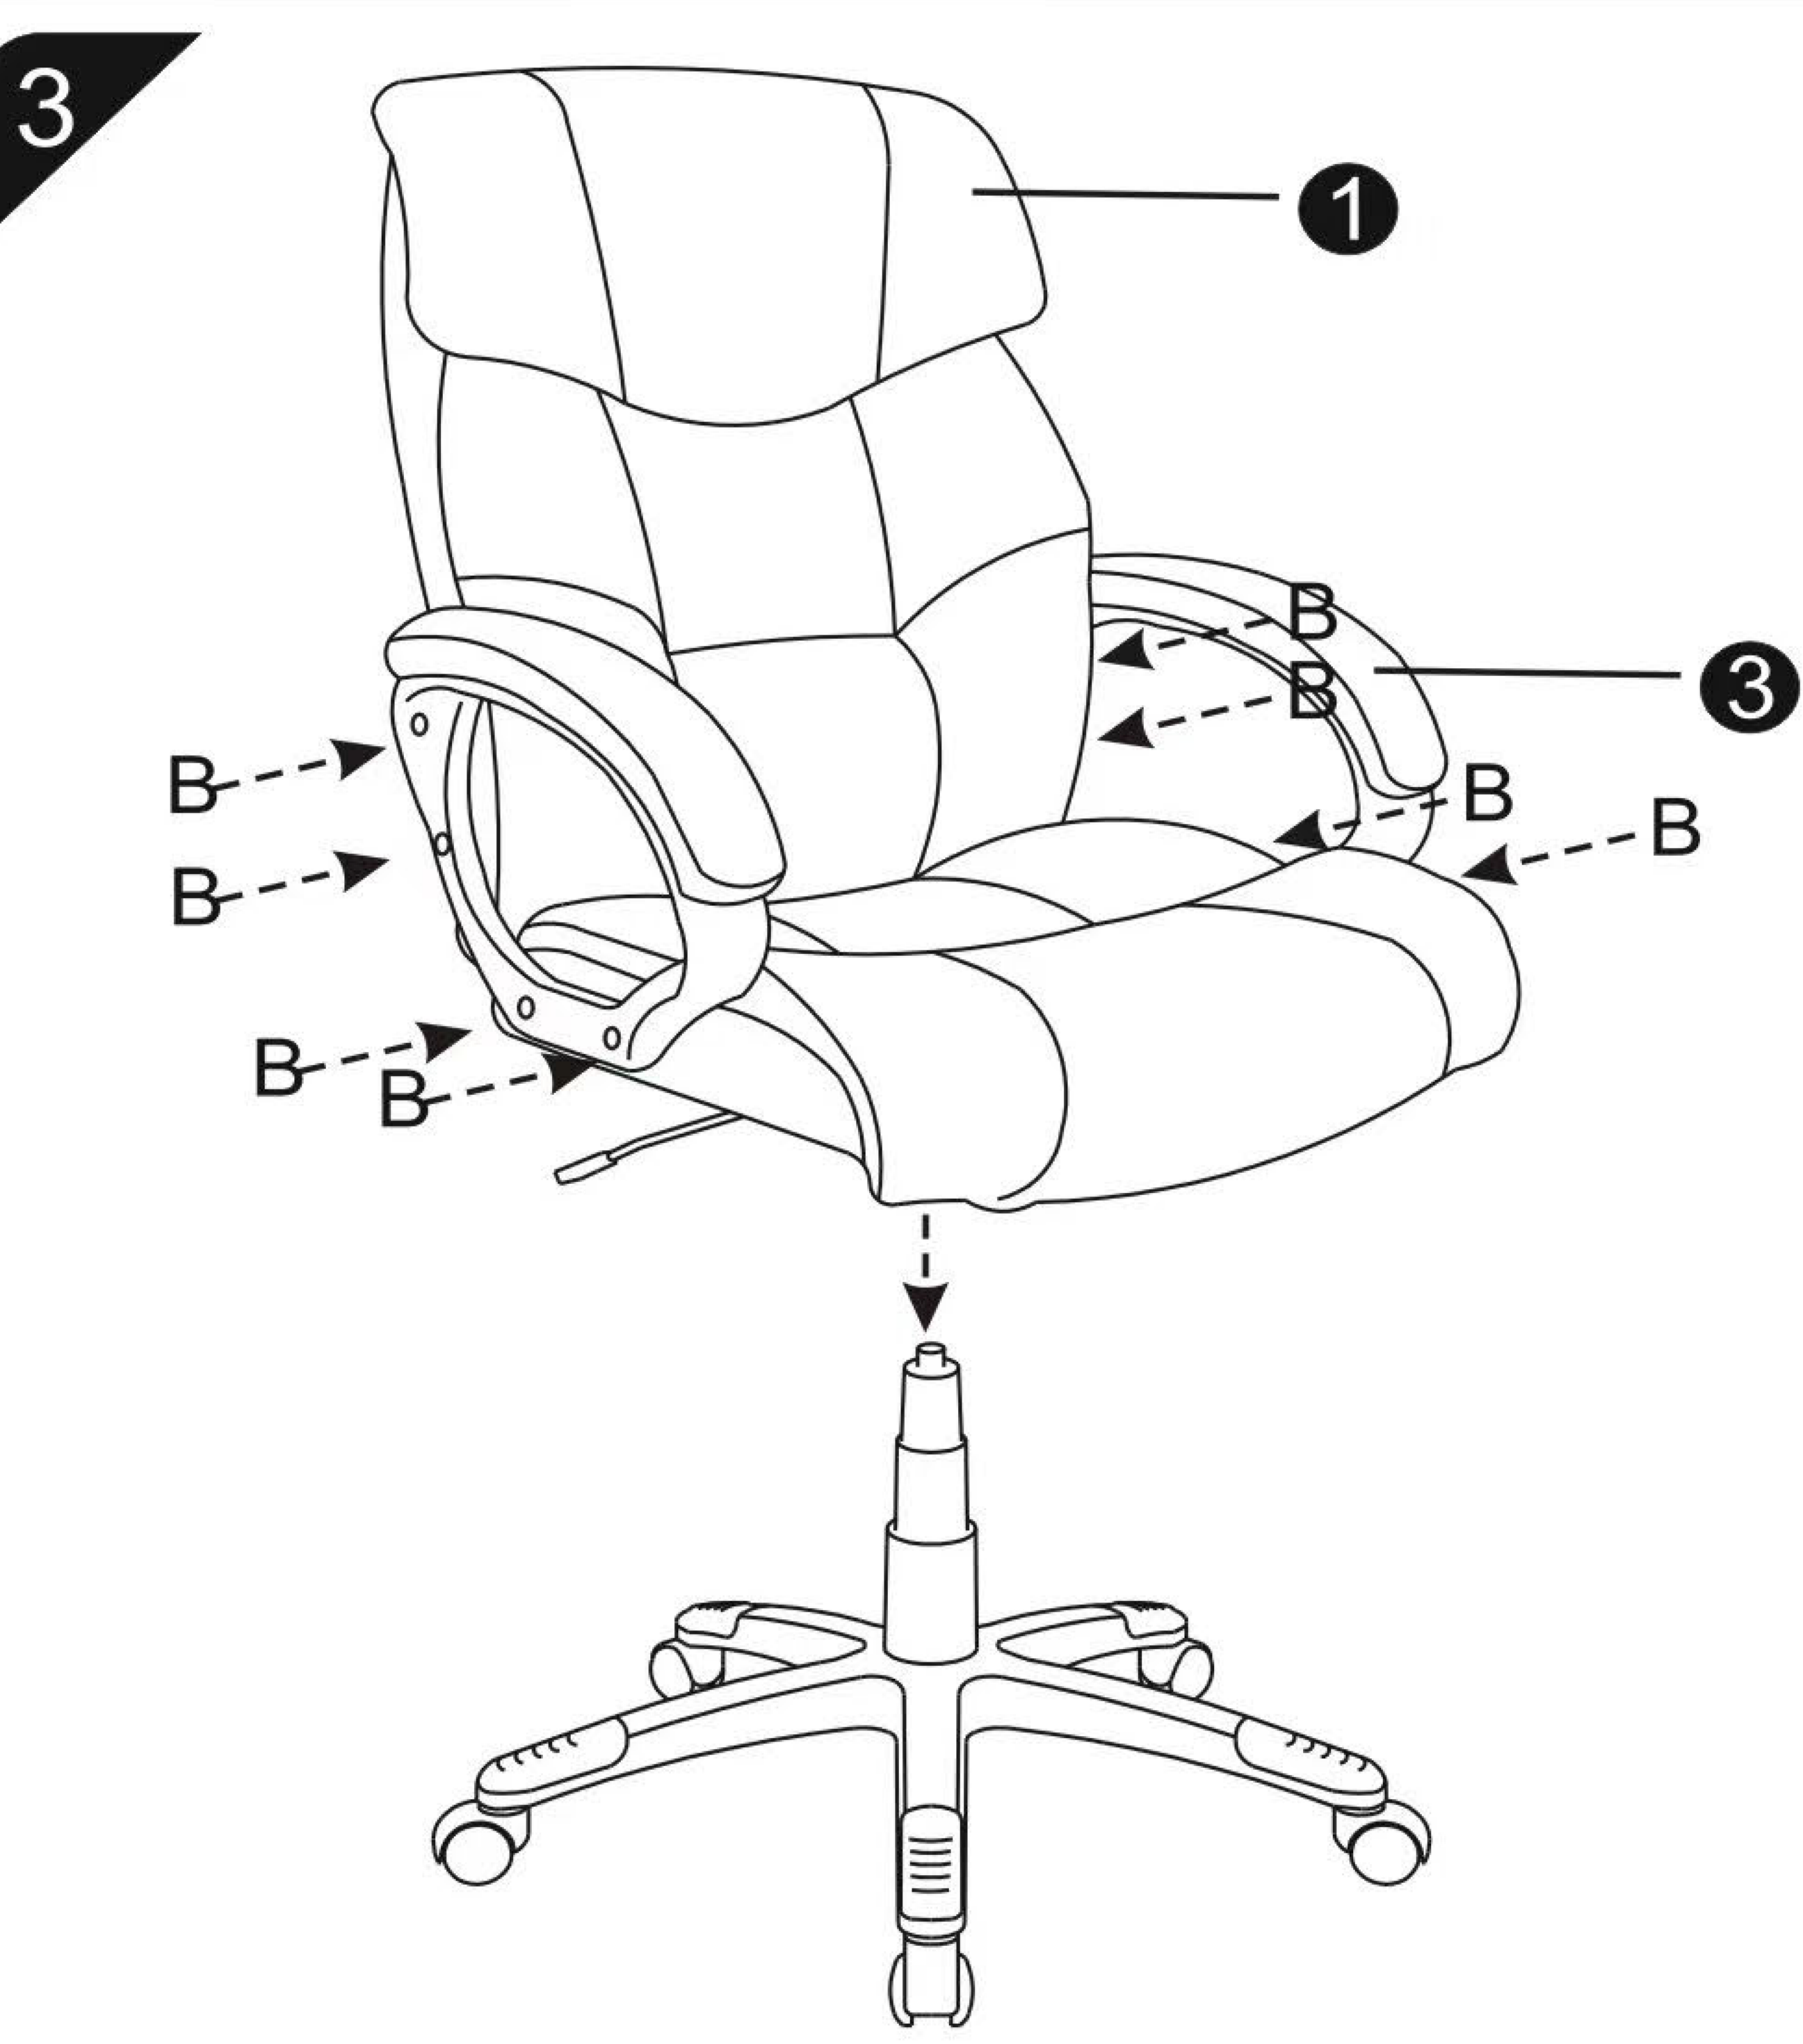


Diagram 3 shows the armrests (3) being attached to the seat (1) using the hex bolts (B) and washers (C).

4

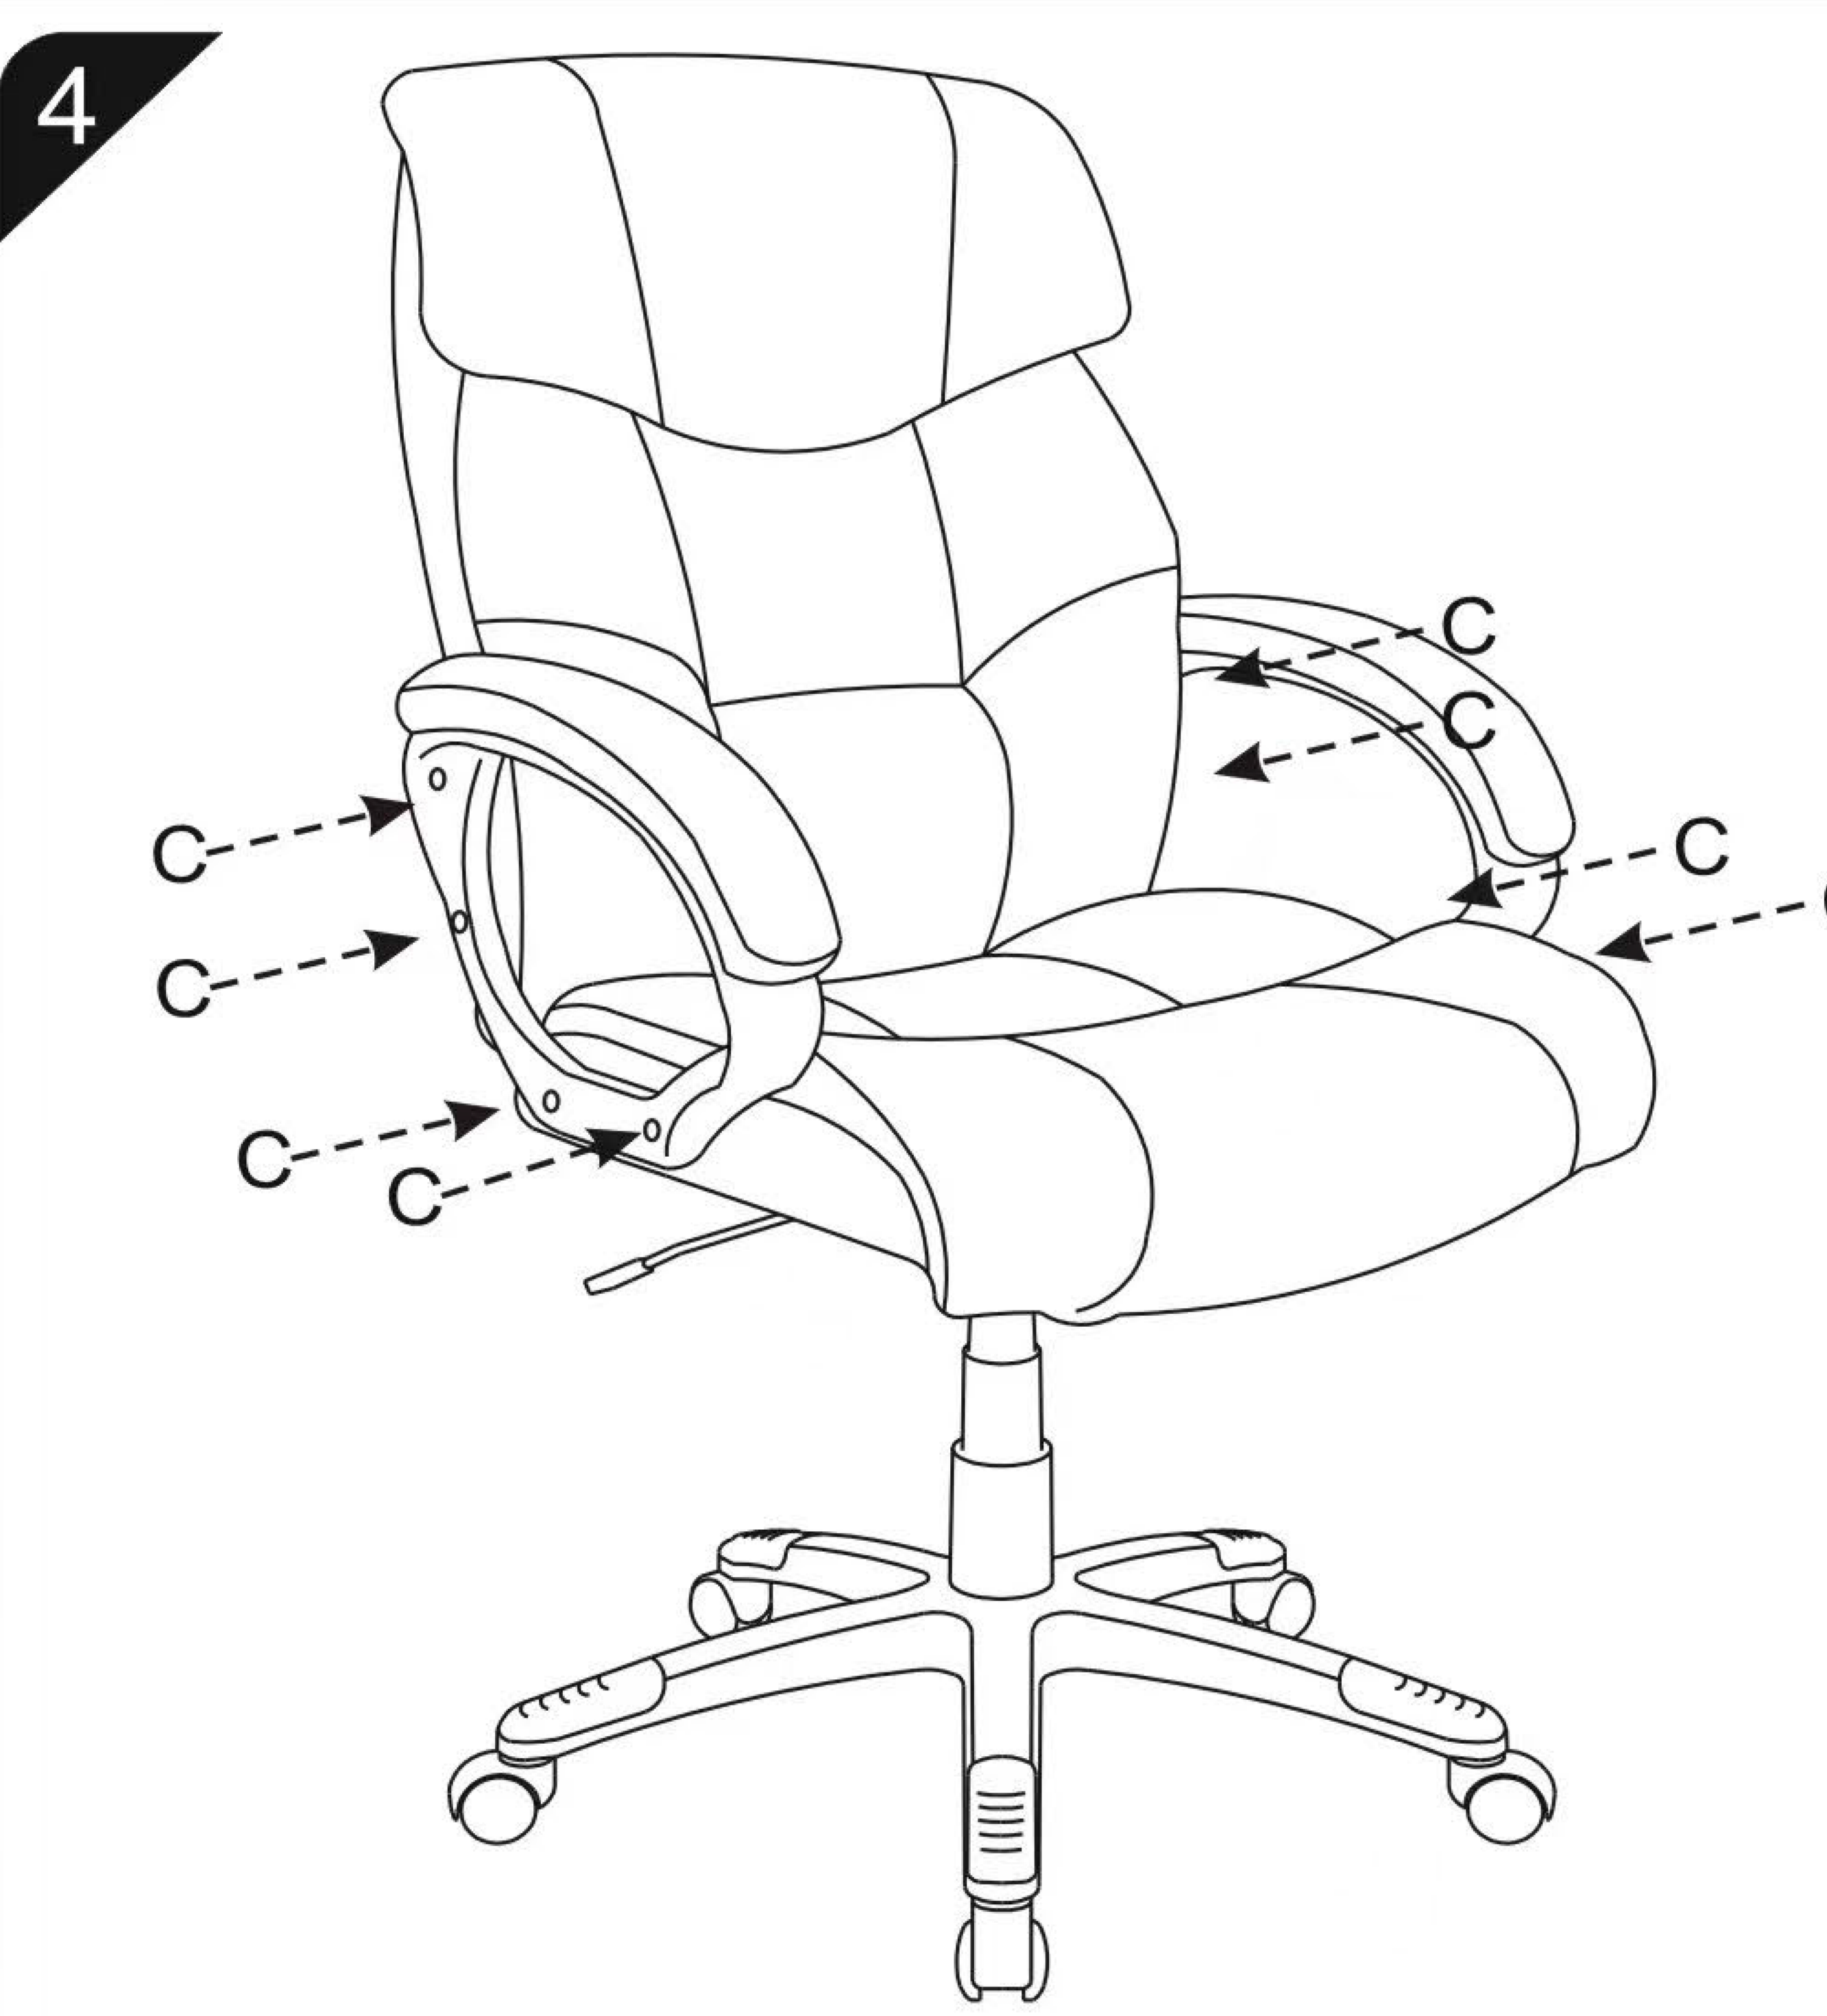


Diagram 4 shows the final assembly of the chair, with the armrests (3) fully attached to the seat (1) using the hex bolts (B) and washers (C).