


INSTALLATION INSTRUCTIONS

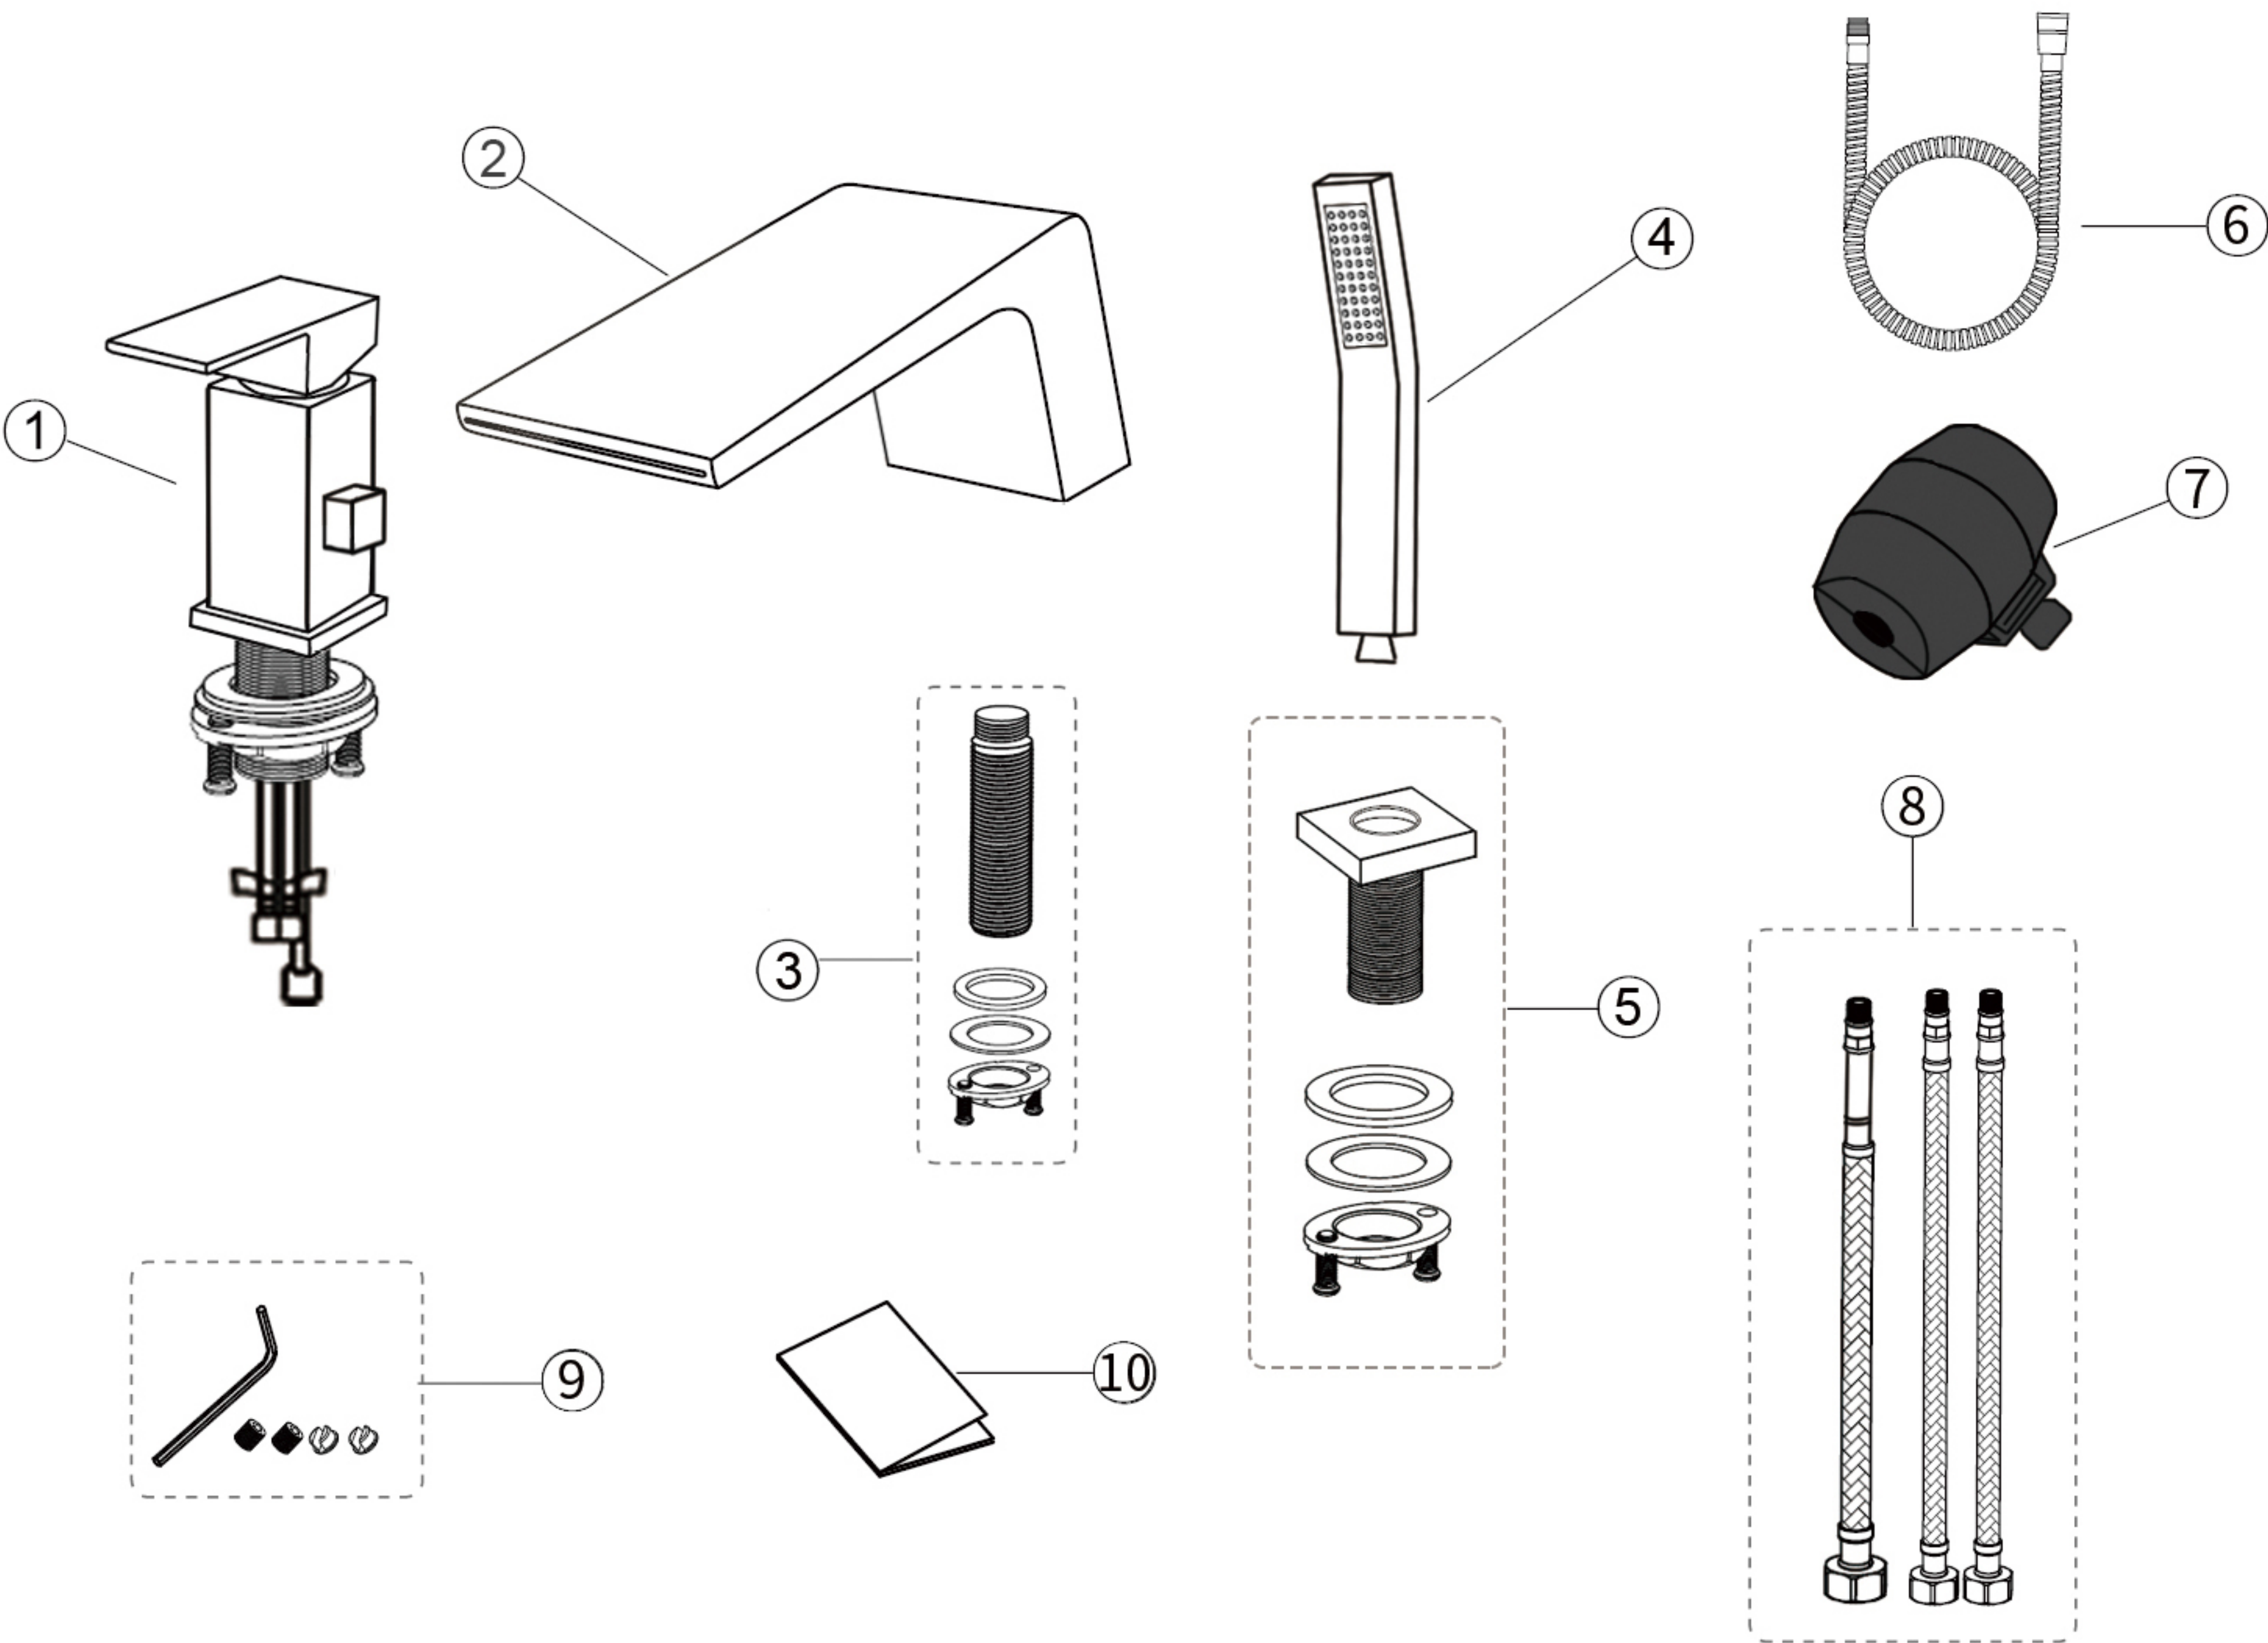


Parts list

NO	PART NAME	QTY	NO	PART NAME	QTY
①	handle fixing parts	1	②	Spout	1
③	Spout fixing parts	1	④	Hand shower	1
⑤	Cover fixing parts	1	⑥	Shower hose	1
⑦	Gravity ball	1	⑧	Water supply hoses	3
⑨	Screws bag	1	⑩	Instructions	1

INSTALLATION INSTRUCTIONS



Dimensional drawing

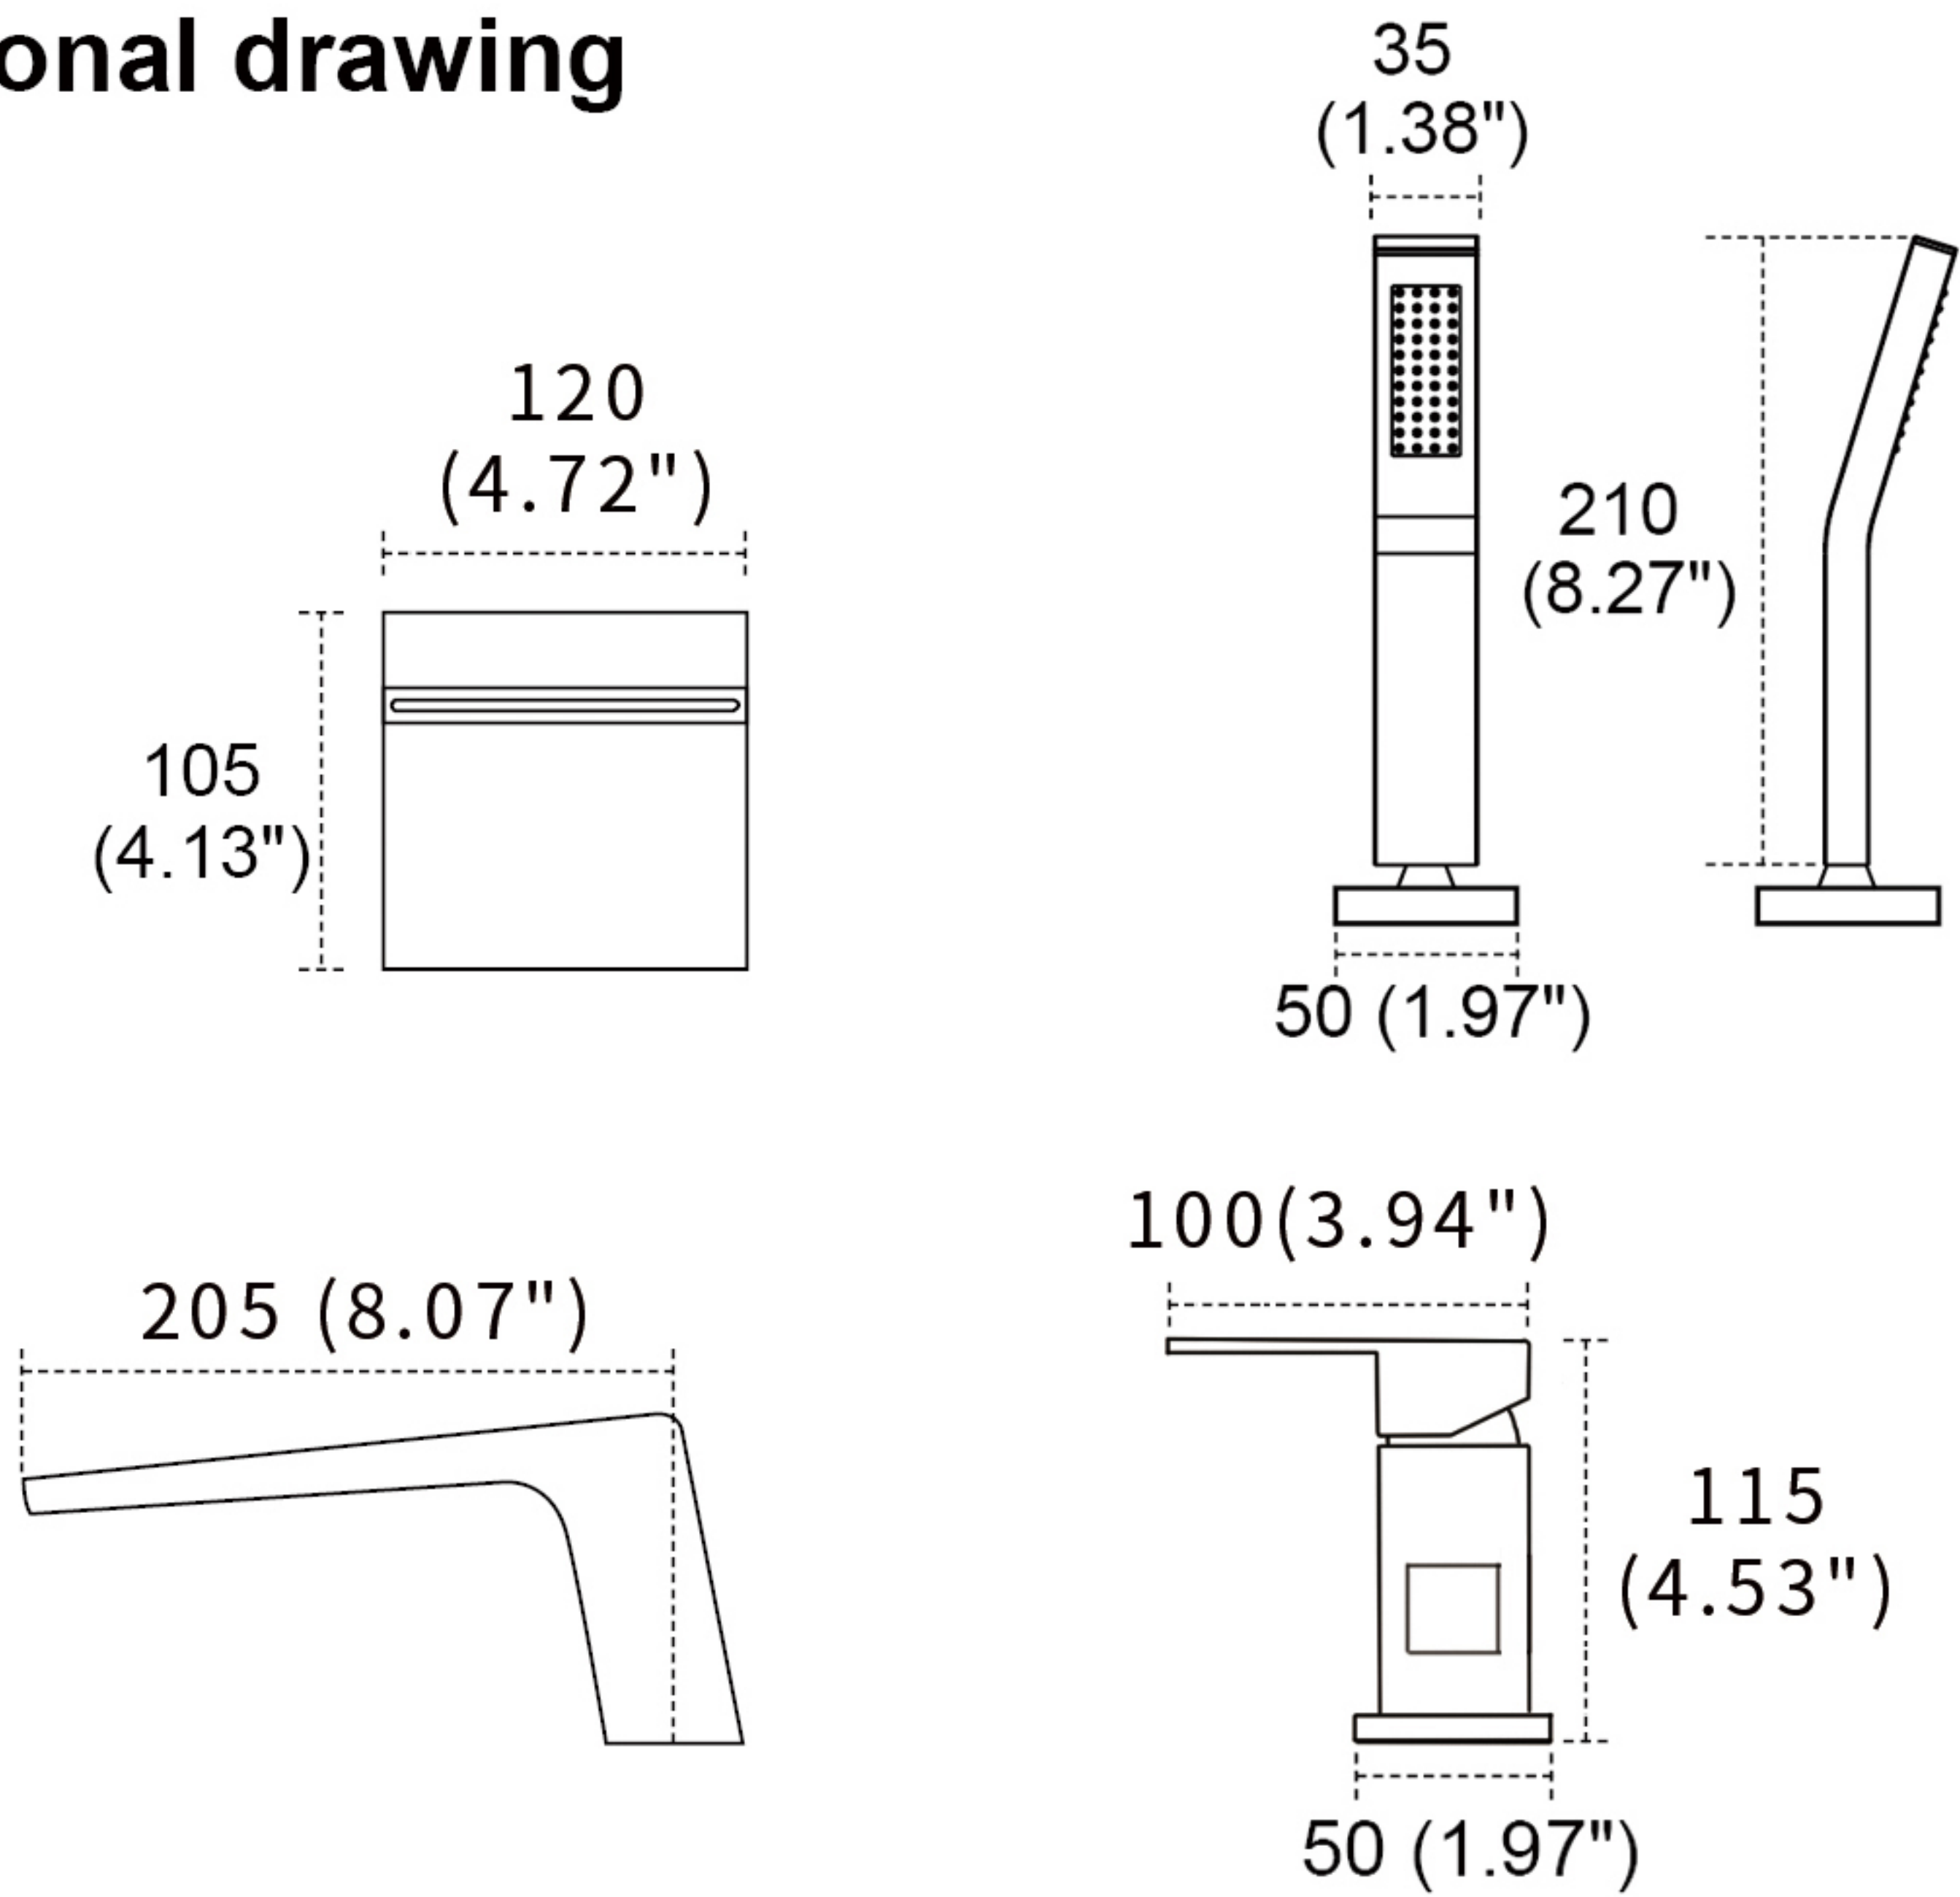


Unit: mm/ inch

Instructions for use


1. Turn on the faucet as picture 1 shows. The greater the handle angle, the greater the water flow; Conversely, the smaller the handle angle, the smaller the water flow, until it is closed.
2. Turn on the faucet. Adjust handle to left to get more hot water; Adjust handle to right to get more cold water. Showed as picture 2.

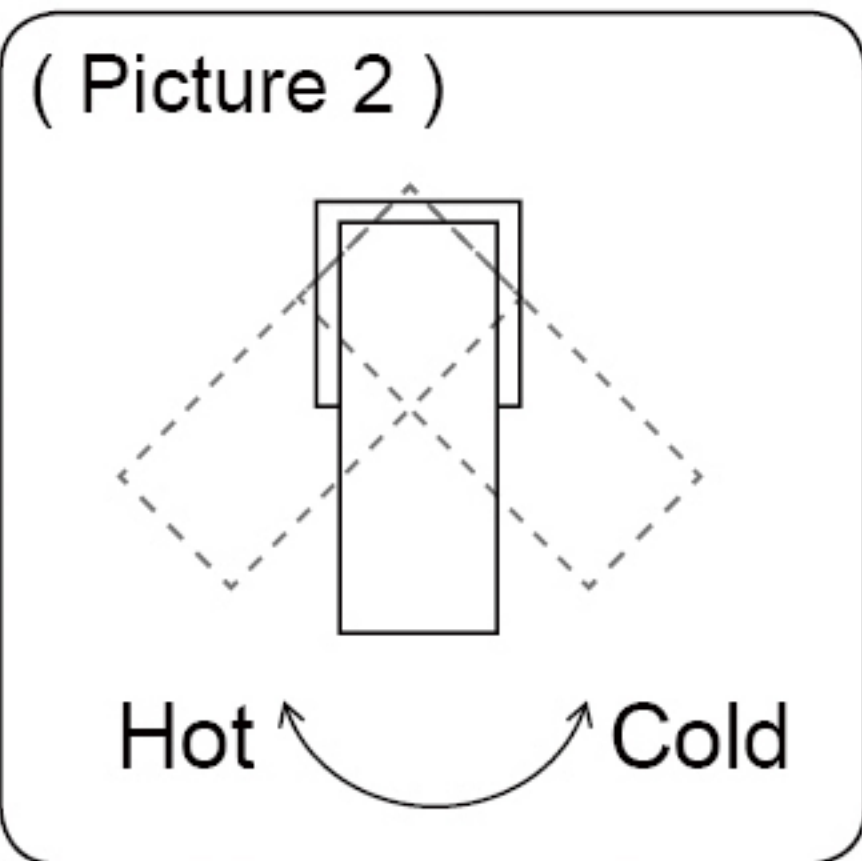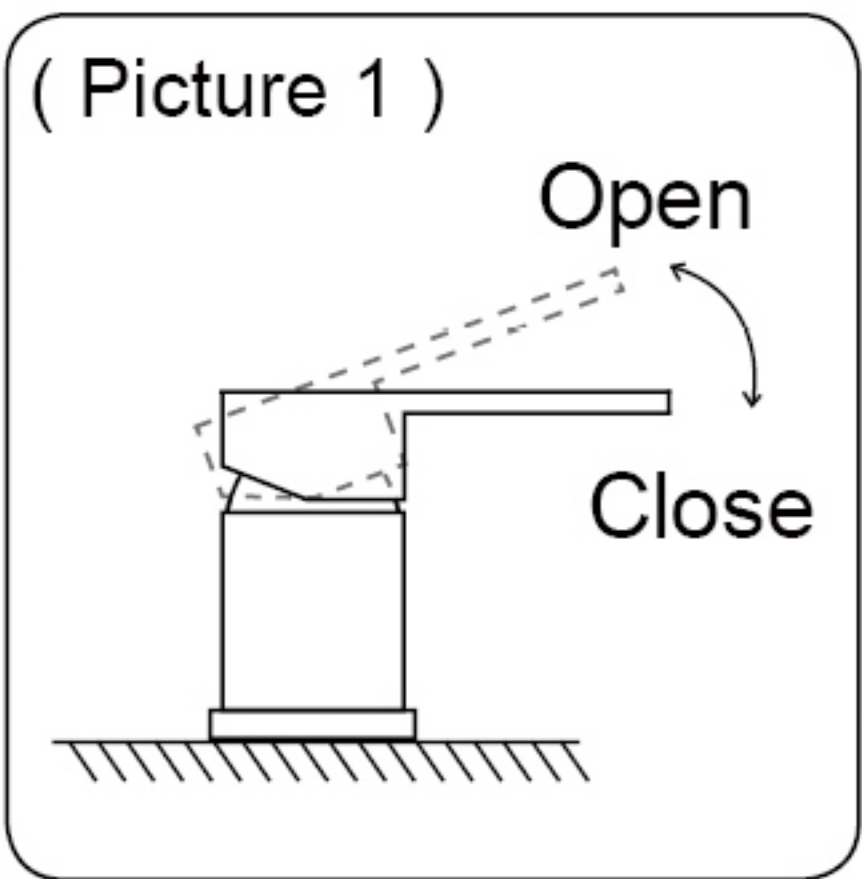


Recommended opening
holes size: (unit: mm/inch)

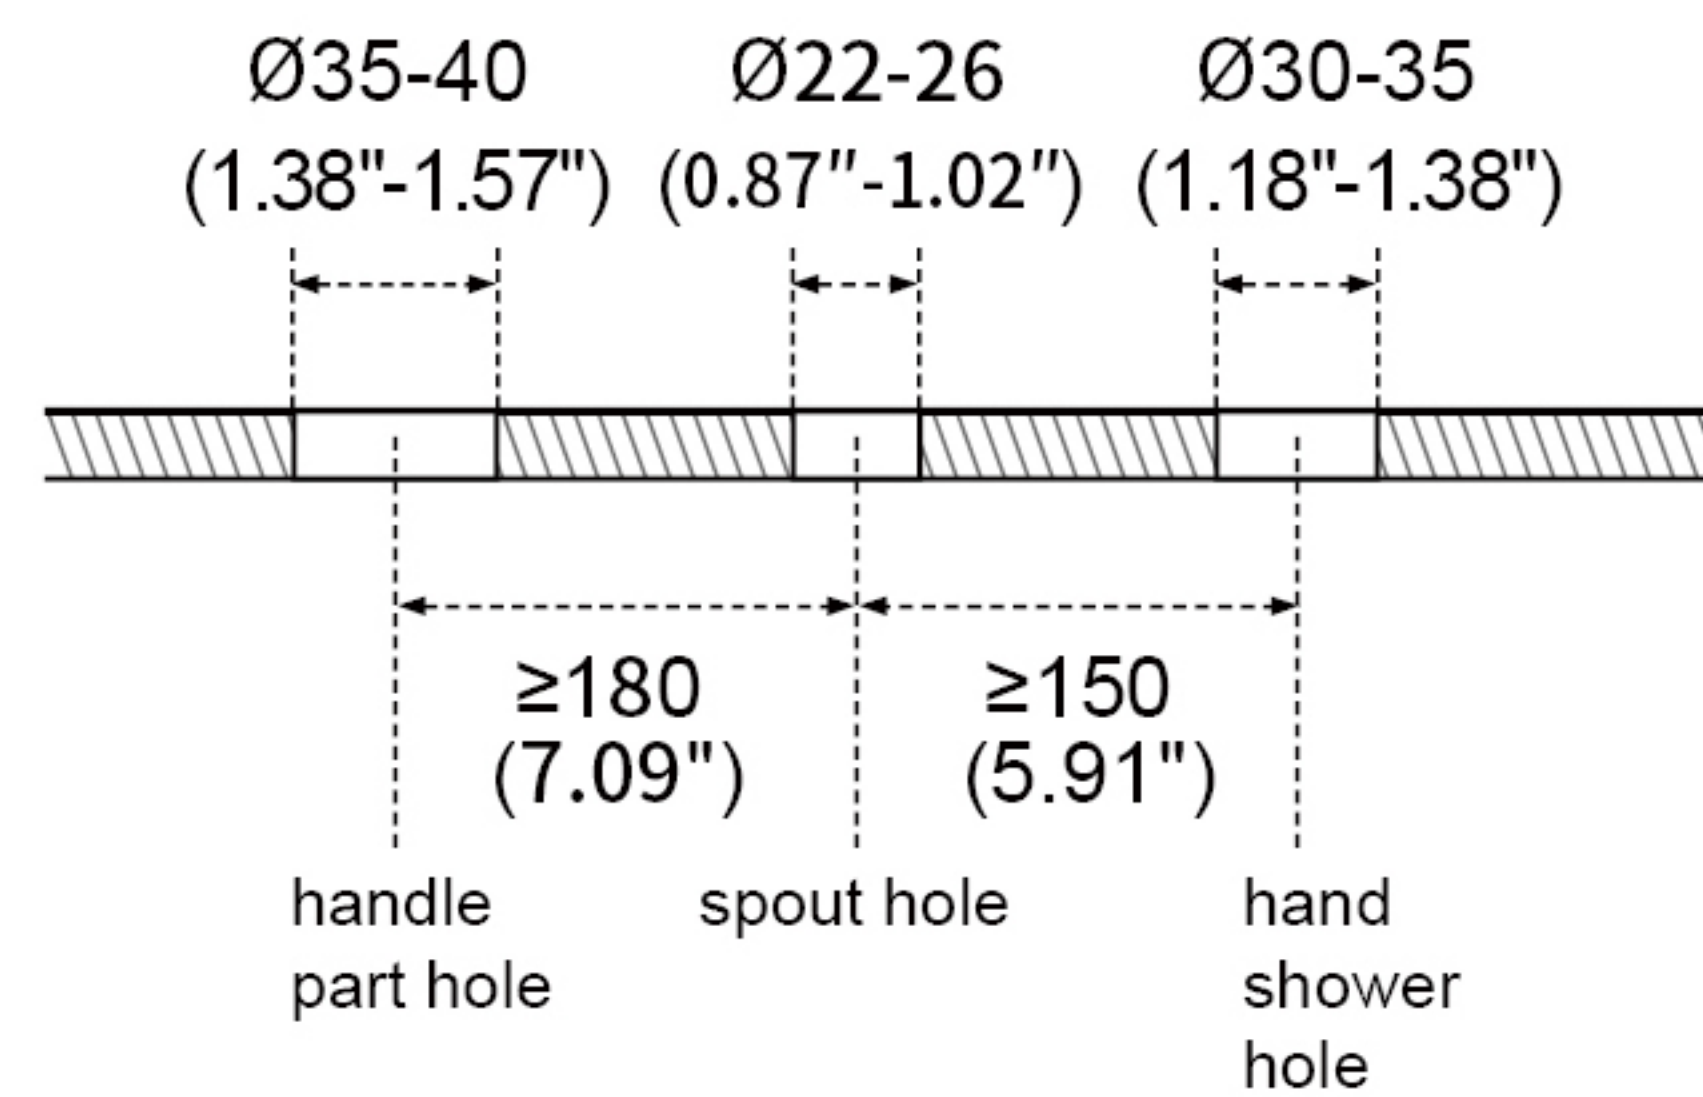


1. Drill holes as recommended opening holes size (Note: holes distance should as picture shows).

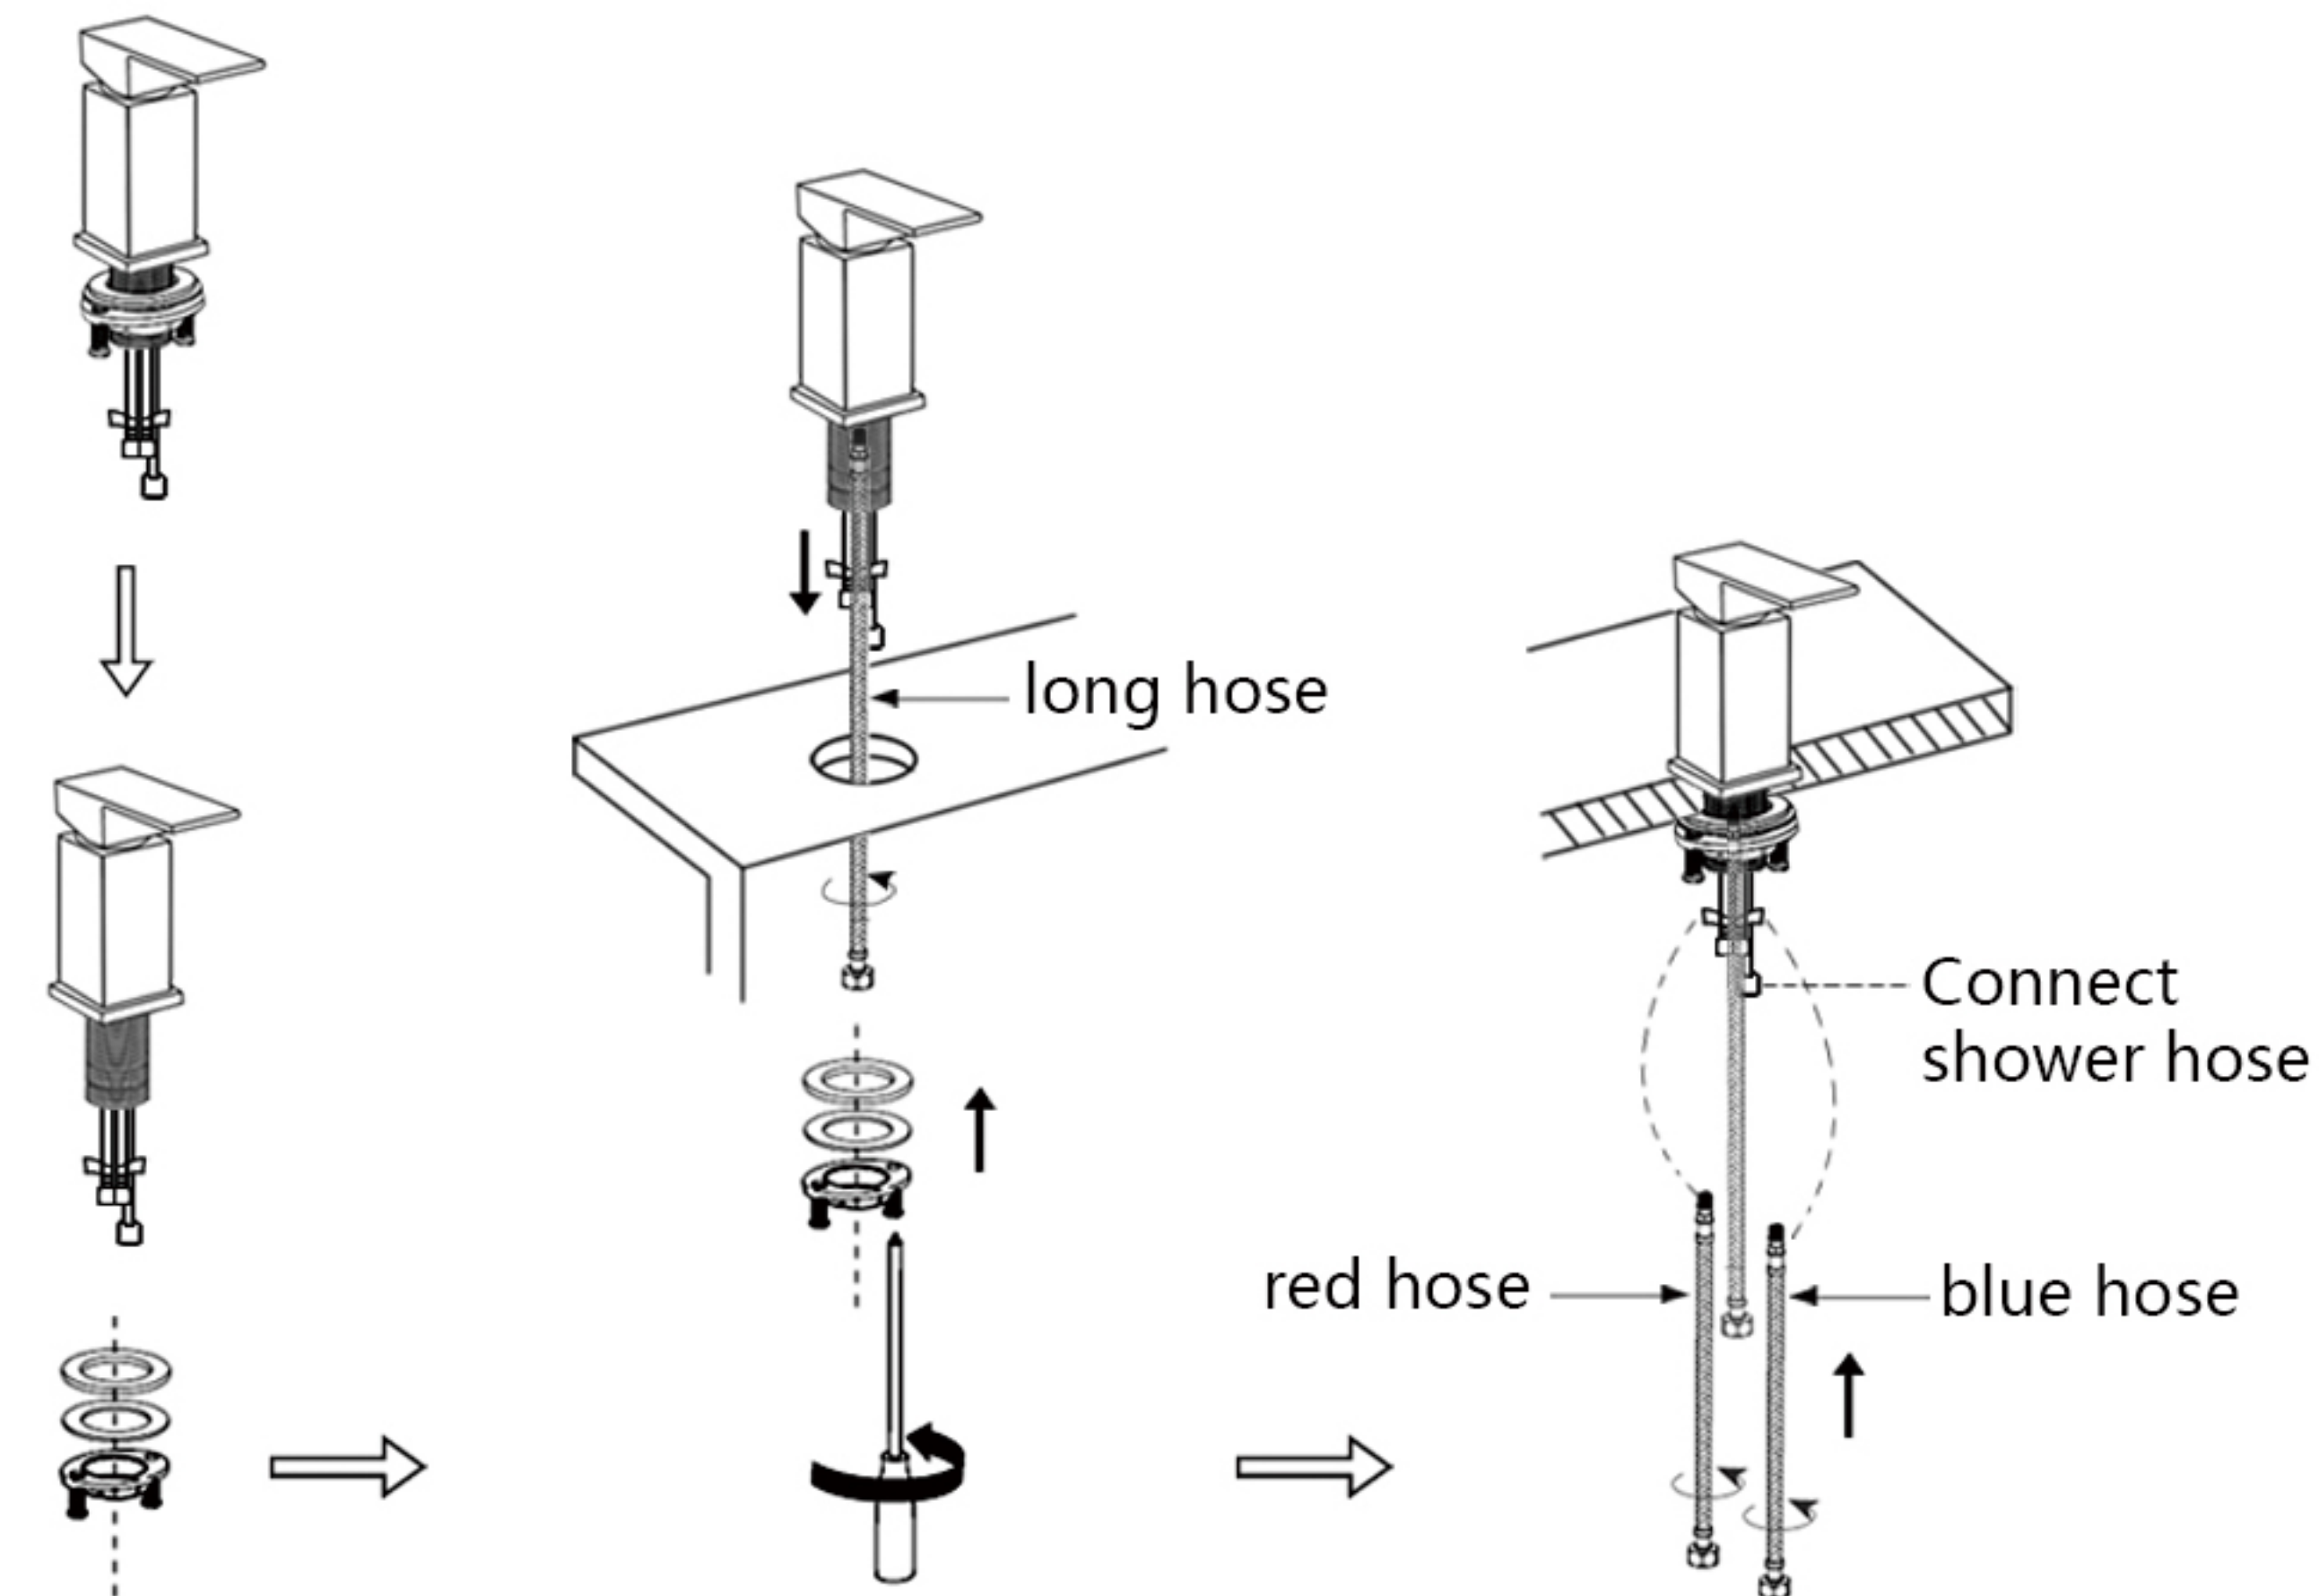


2.(a) The mounting Hardware must be removed from the control handle before installation.
(b) Install the long hose then through the mounting hole.
(c) Screw in mounting hardware. Tighten the 2 screws with a screwdriver to secure the control handle in place.
(d) Connect the red hose and the blue hose to the hot hose and the cold hose as shown in the picture.

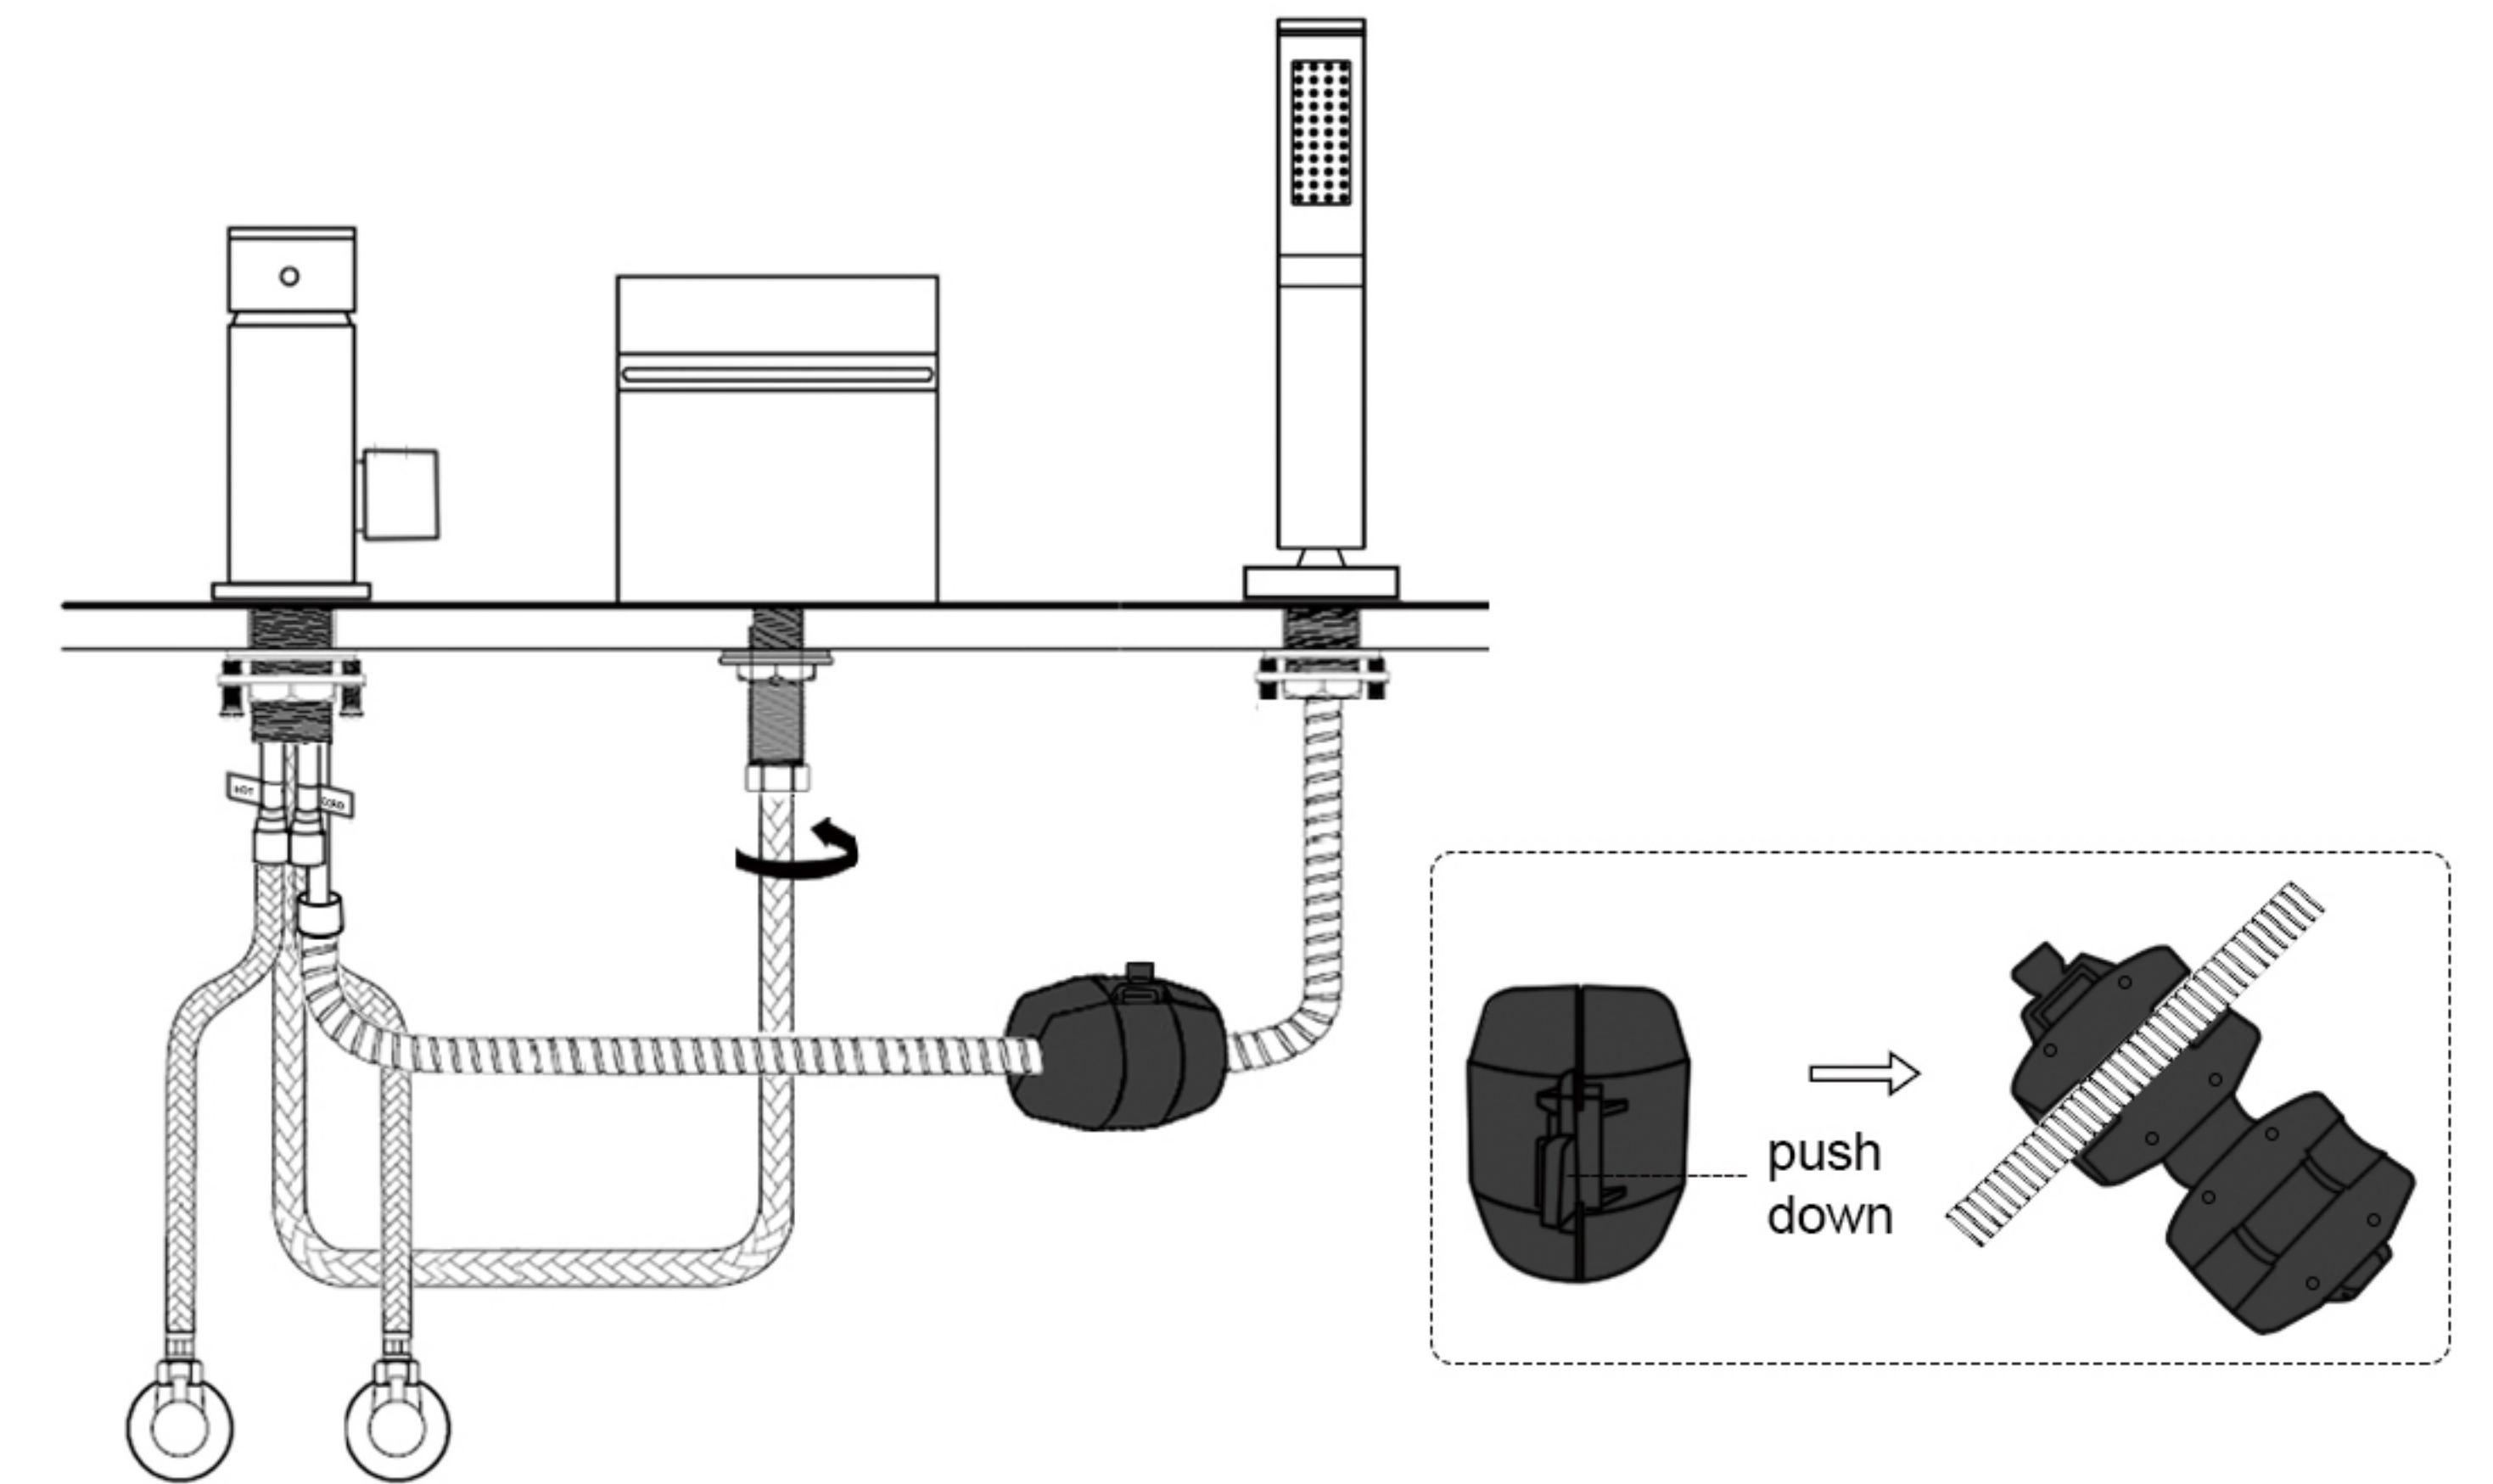


5.(a) Connect the red & blue hose to the hot and cold angle valves.
(b) Connect the hose to the hand shower hose and control handle hose valve as shown in the picture.
(c) Connect the hose to the tub spout and control handle long hose valve as shown in the picture.
(d) Open the gravity ball, clamp the shower hose, then close the gravity ball.

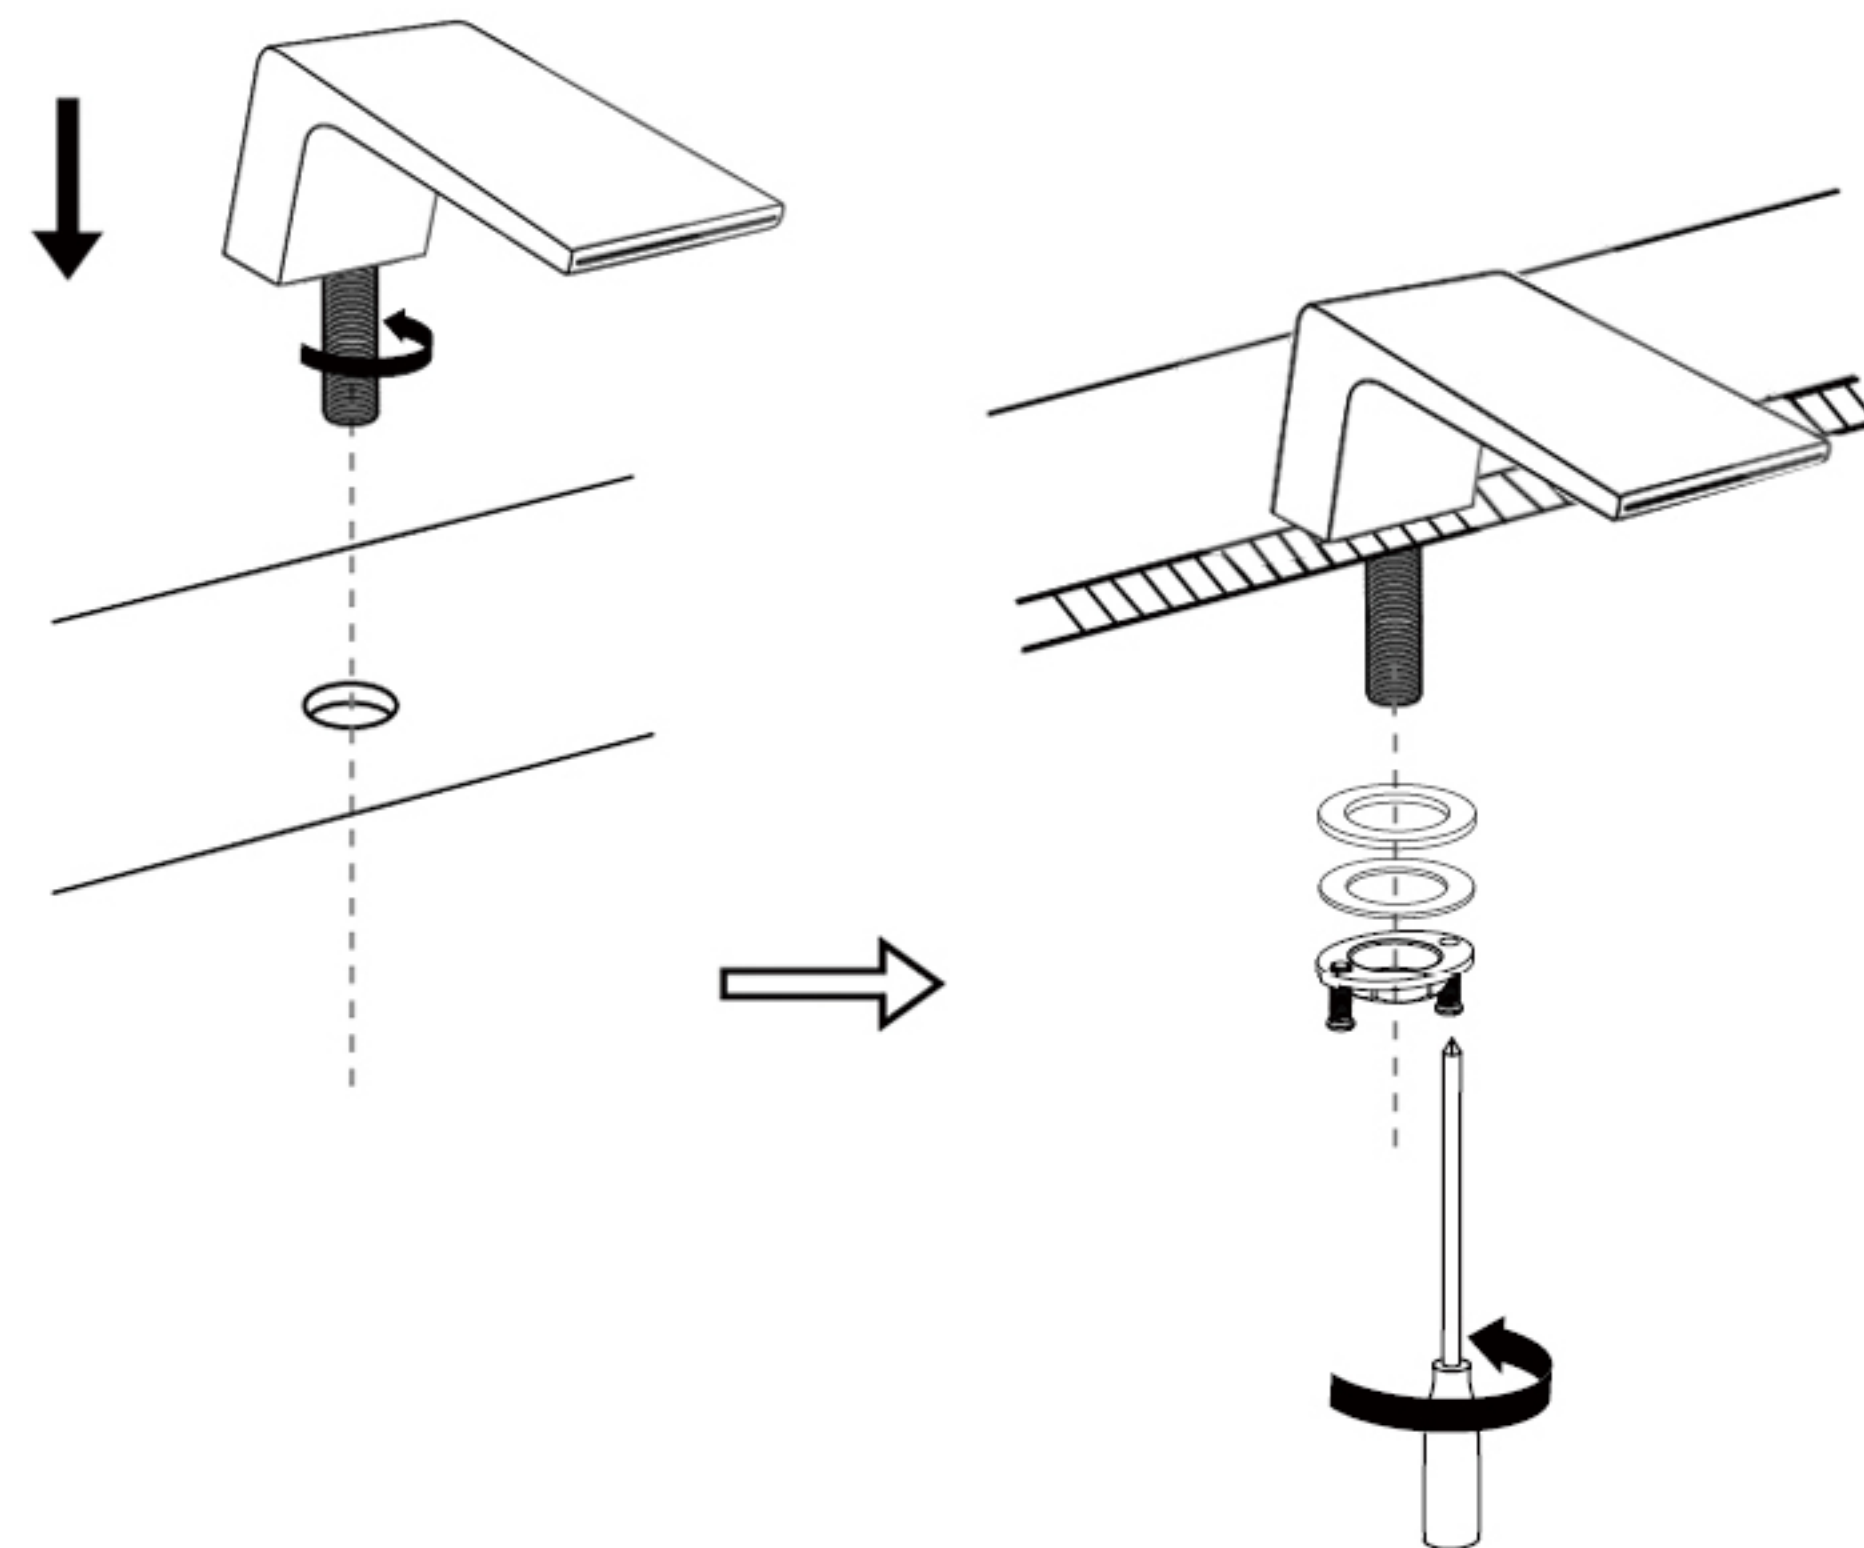

3. Screw spout fixing parts to spout, unscrew the washers and the fixing nut, place spout to bathtub hole, reinstall washers and fixing nut then hand tighten them.

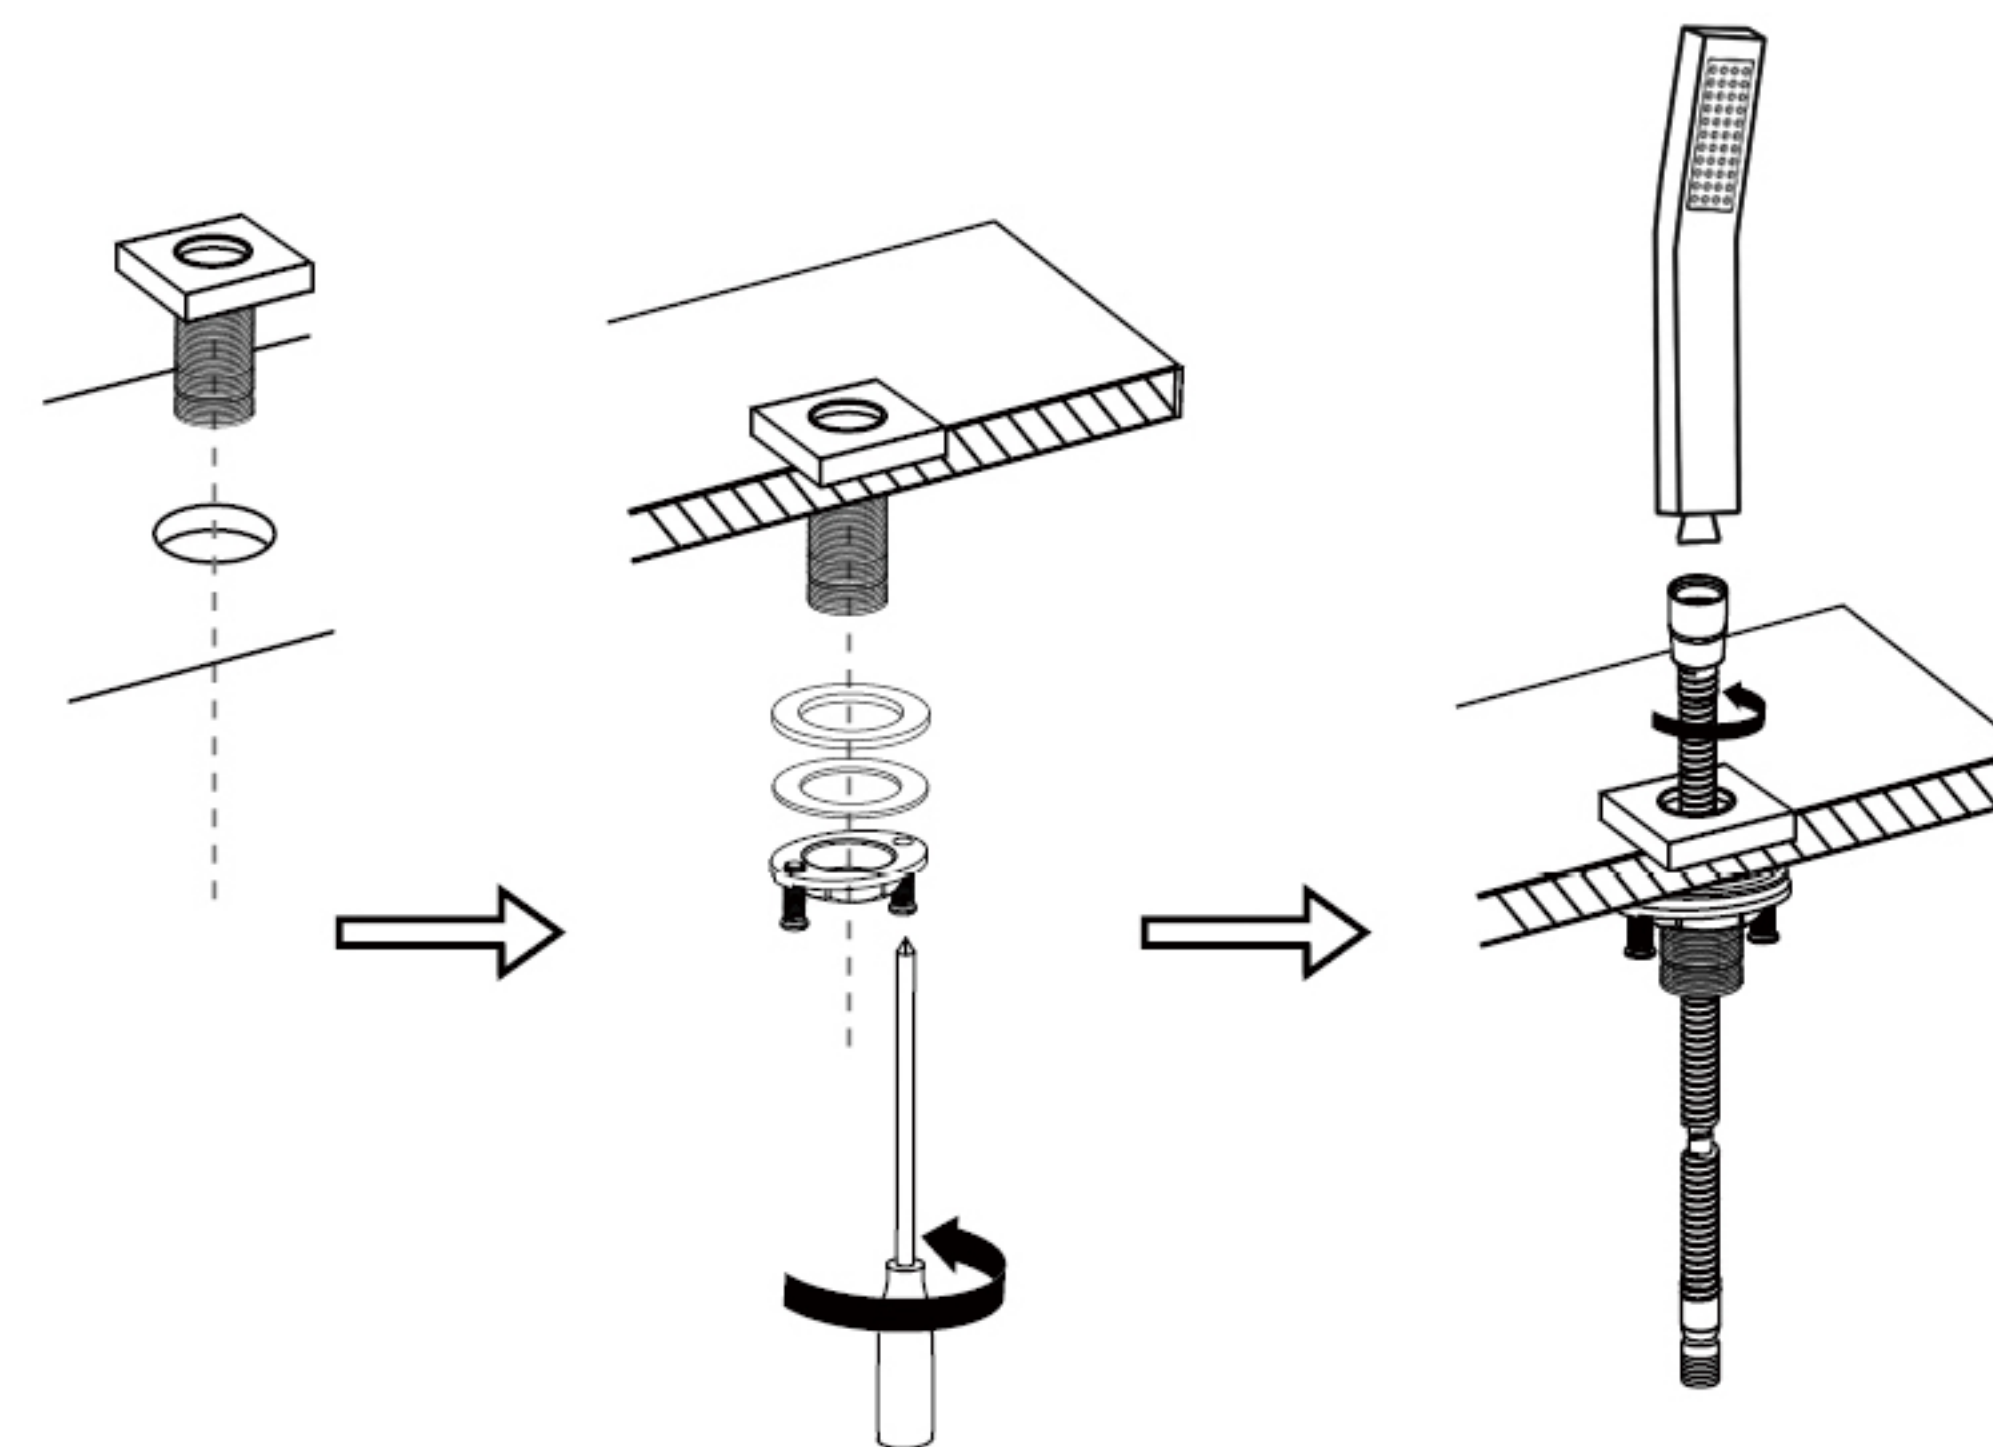

4. Unscrew the washers and fixing nut from cover & connector, place cover & connector to bathtub hole, reinstall the washers and fixing nut; connect hand shower and shower hose then place the shower hose to the bathtub hole as picture show.

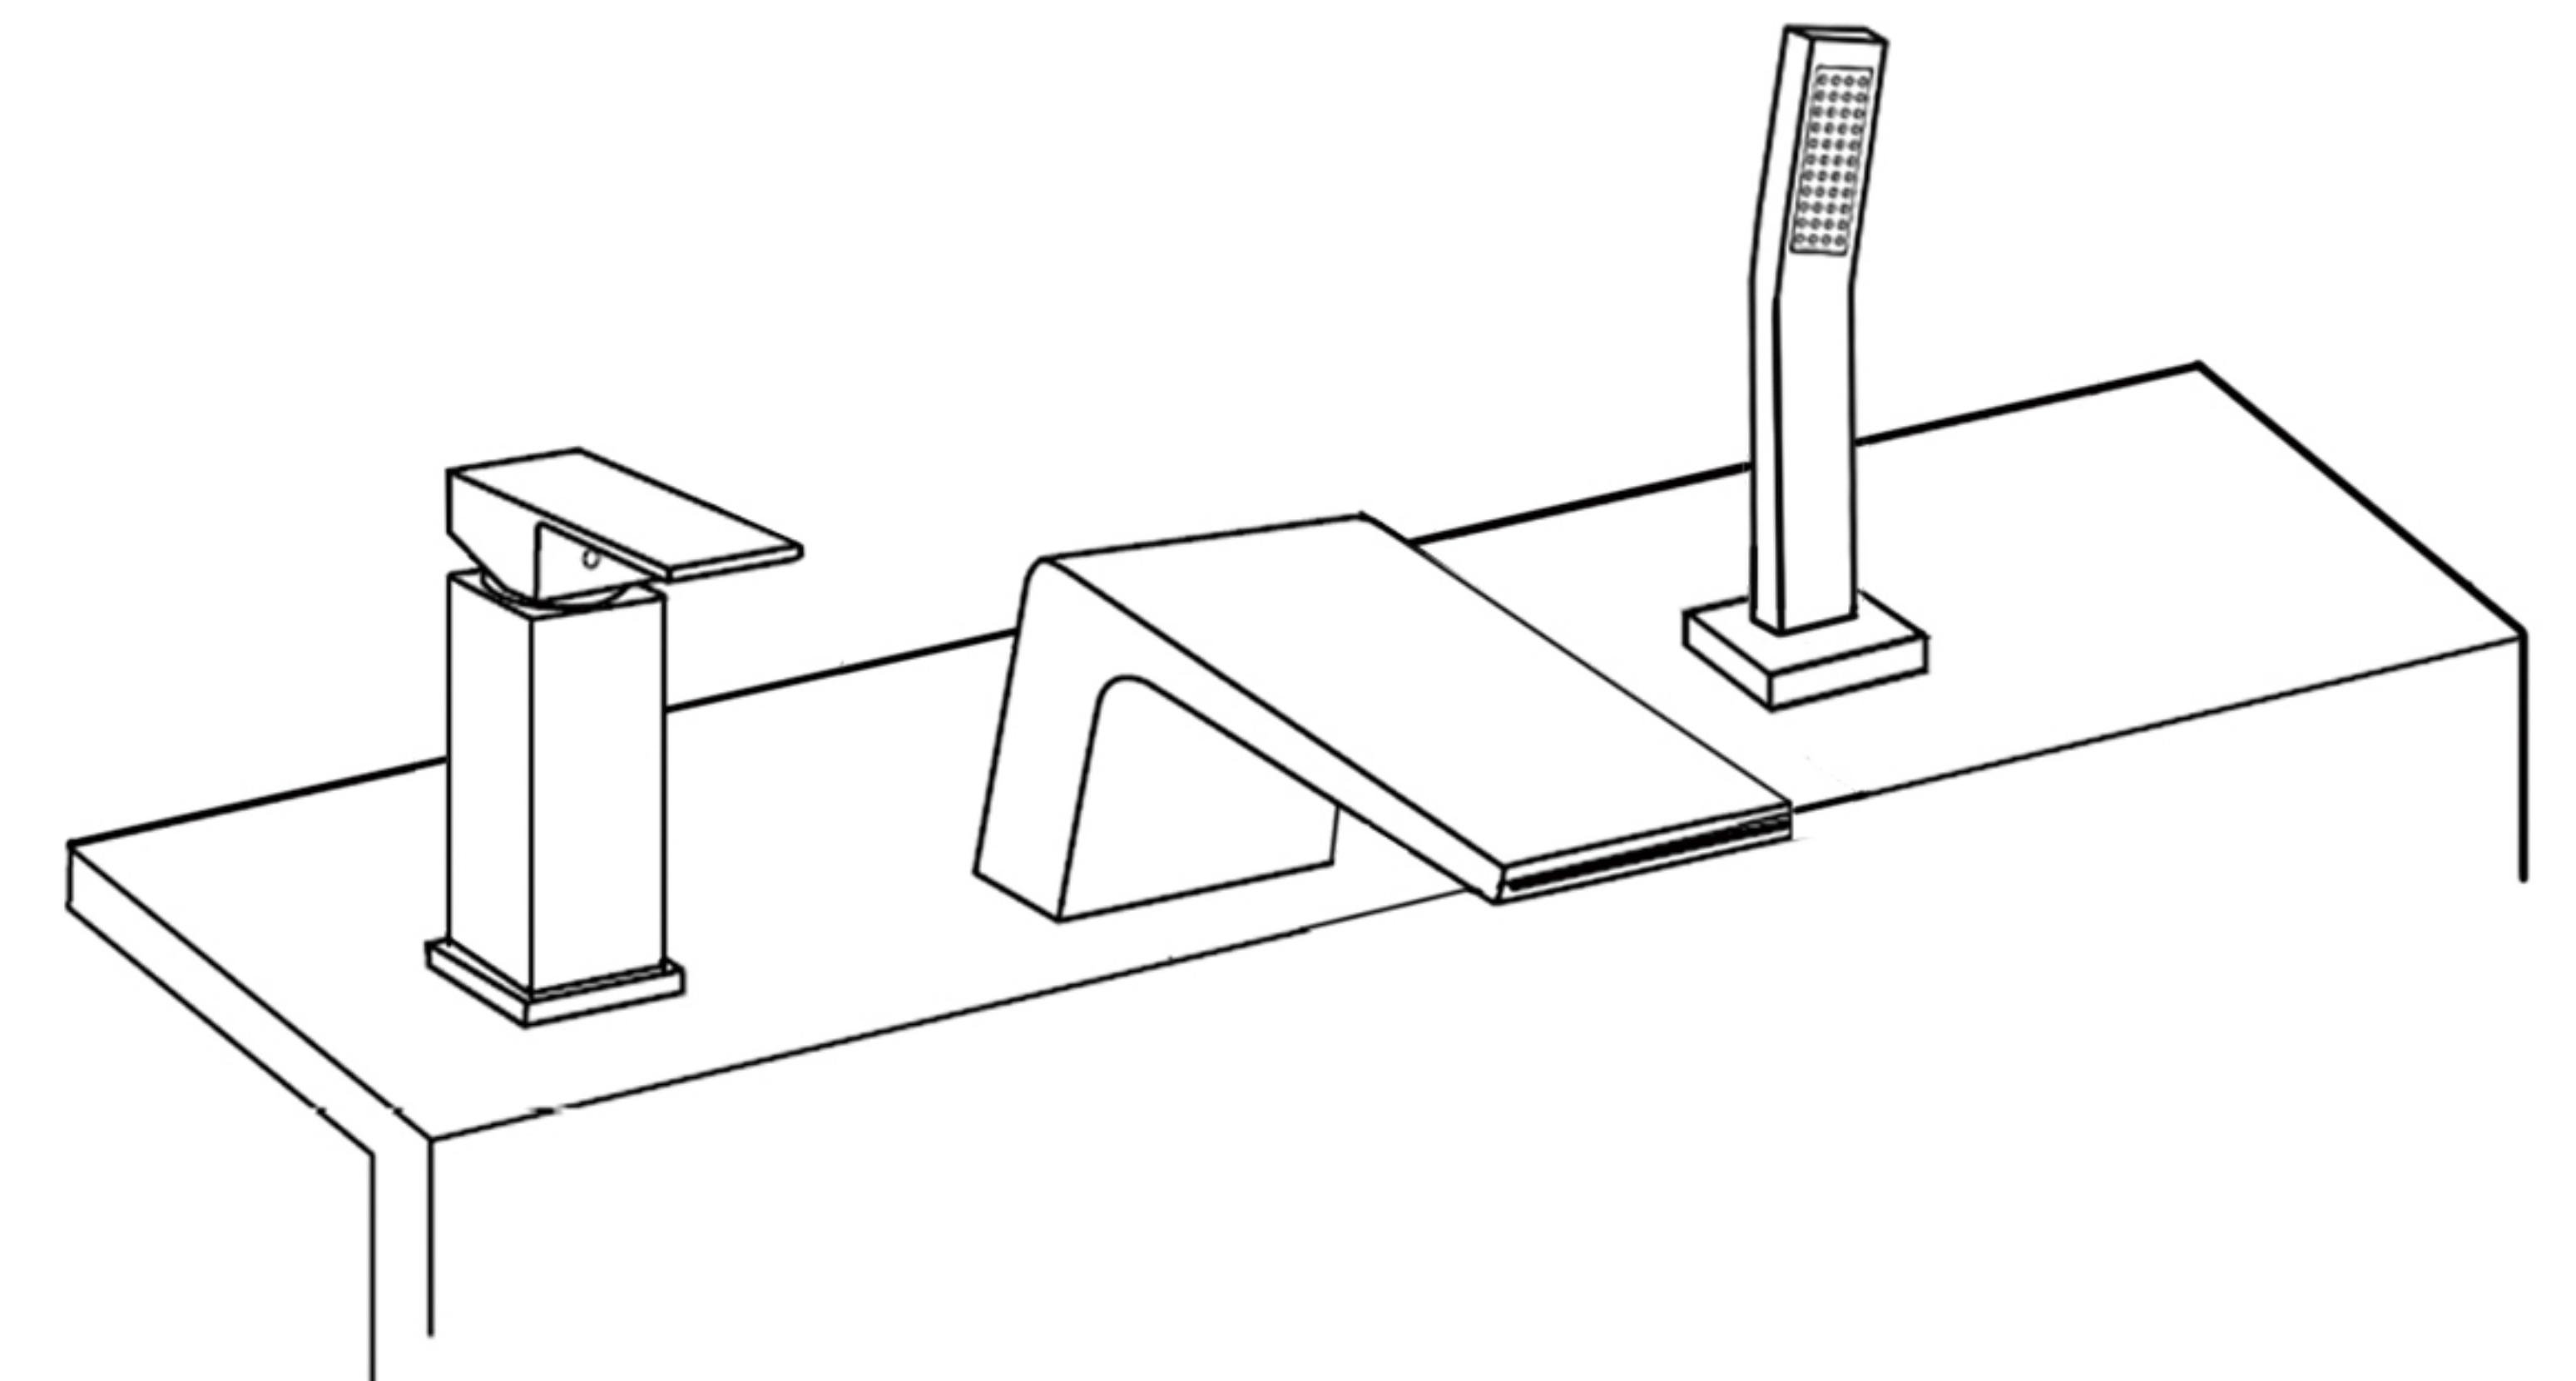

6. Turn on water, check for leakage, retighten the hoses if necessary.