

# Instructions


## WARNING

- Check for electric, gas, & plumbing lines before drilling or consult a professional.
- Turn off your electricity at the circuit breaker or main fuse box before installation. Do not restore power to the line until the light has been fully installed.
- Do not use with bulbs exceeding the recommended wattage.
- Always switch off the electricity supply and allow bulbs to cool for 10 minutes before changing it.
- Do not look directly at lit bulb.

## ASSEMBLY

It is recommended to use two or more persons during the assembly process.

1. Use 8 M4 screws. The circle is locked in 4 parts to form a circle
2. Thread three point wires through the connecting rod and connect them to the junction box
3. Connect the black and white wires with the marked positive and negative terminal blocks. Note that the white wire is the negative pole and the black wire is the positive pole
4. Fix the junction box with a junction box and a hanging chain
5. Fix the lamp body to the ceiling using canopies and mounting brackets
6. Put on 12 pieces of Casting \* and install E12 light bulbs, then turn on the power switch. Installation completed

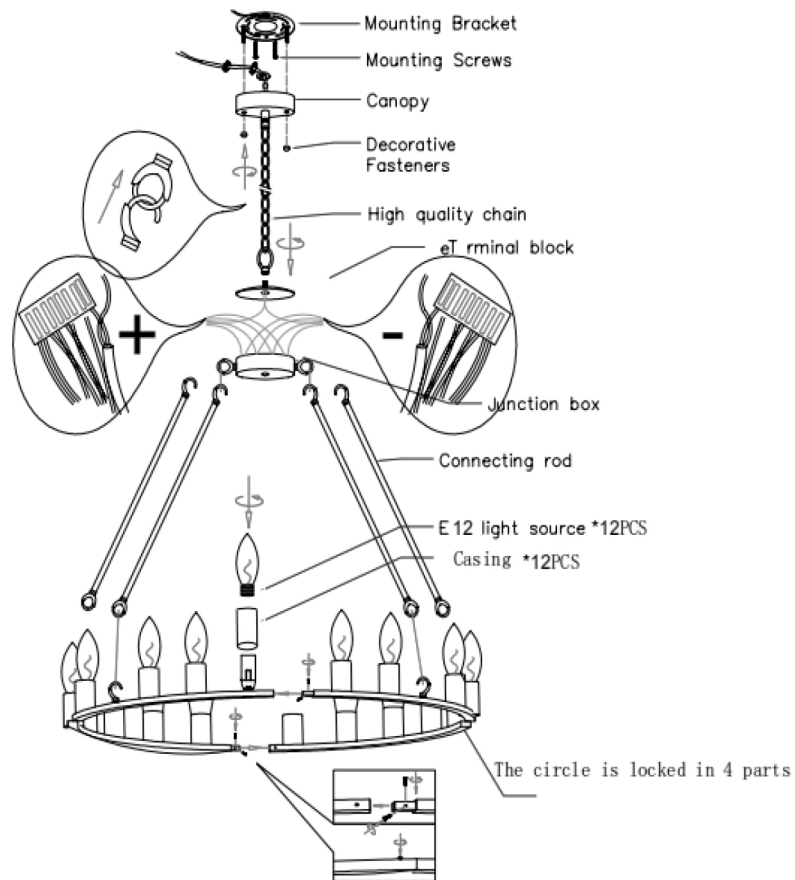

Just Scan the Below Code for Installation Video.



249B

1 2 x E12Socket  
Max.60W Bulbs  
(not included)