




THE COLONIAL LEVER LATCH

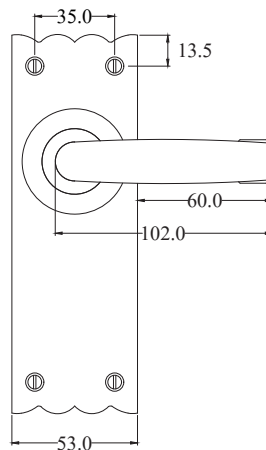

1

INSIDE / OUTSIDE VIEW

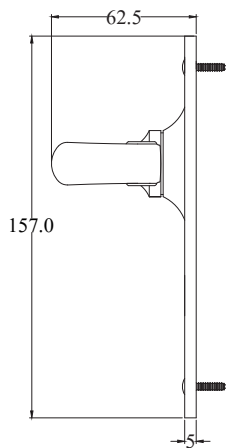


This lock handle is suitable for use with most U.K. Euro Profile cylinders and sashlocks with a 48mm CTC.
For a new exterior door installation we would recommend for use with our York Euro Profile sashlock ref: YKCSLE29.CE (2.5") or YKCSLE39.CE (3").
A separate Euro Profile cylinder in a size to suit the door thickness will also be required to operate the lock mechanism.

2



Spindle : 7.8mm x 80mm - 1pc.



Spindle : 7.8mm x 90mm - 1pc.

3



No. 6 x 25mm Steel starter screw x 1pc.
Drill pilot holes, use the starter screw to cut a thread

4



No. 6 x 19mm Black-Nickel Plated
Stainless Steel (SS) wood screw x 8pcs.
Fasten the SS screw into the pilot hole

1

2

3

4

Box
Contains

1 x Lever Handle
Pair

1x 80mm spindle for 35mm door
1x 90mm spindle for 45mm door

1x Steel pilot wood screw

8x SS wood screws



M Marcus Ltd., Dudley

Material	Date	Product Code	Description	Sizes shown are in mm and approximate. We reserve the right to amend where necessary and without any prior notice.
Malleable Iron	23 July 2016	TC310	The Colonial Lever Latch	