

ASKO
Inspired by Scandinavia



Dishwashers

50 Series |  ConnectLife



Turbo Combi Drying™

Combination of fan drying and sensor controlled auto door opening. No more hand-drying.



Exclusive Flexiracks™ with top tray

Can hold 16 place settings. XXL: tallest interior tub on the market.



8 Steel™

Eight of the most important parts are made of robust steel or high grade stainless steel. Designed to last for 20 years.



9 Spray™ Zones

Including 2 adjustable PowerZones for all kinds of dishes.



Enjoy the power of silence - 40 dB(A)

Brushless motors.
(38 dB(A) in Night Mode).



Status Light™

Indicating the progress of the program.



2 LED Interior Lights

Makes loading and unloading simpler.



Quick Pro Program

Great washing and drying performance in 69 minutes.

50 Series Dishwasher

Durable and sturdy steel racks: 3 level Flexiracks™, **Low noise level: 40 db(A), (38 dB(A) in Night mode), Effective and fast drying:** Turbo Combi Drying™ system with sensor control, **Heavy duty design:** 8 Steel™ construction, **Superior cleaning performance:** 9 Spray™ system, **Wi-Fi connection with connected app**



DBI5651XXLS
Pocket Handle
Built-In, XXL
Stainless Steel
Interface: Logic



DBI565TXXLS
ASKO T-Bar Handle
Built-In, XXL
Stainless Steel
Interface: Logic



DBI565THXXLS
Tubular Handle
Built-In, XXL
Stainless Steel
Interface: Logic



DBI565PHXXLS
Pro Handle
Built-In, XXL
Stainless Steel
Interface: Logic



DFI565
Panel Ready, XL
Interface: Logic
ADA Height



DFI565XXL
Panel Ready, XXL
Interface: Logic



DFI565XXLSOF
Panel Ready, XXL
Interface: Logic
Water Softener



DSD565
Panel Ready, Sliding
Door, XL
Interface: Logic
ADA Height



(Shown: DBI565THXXLS)

Features

- 8 Steel™ construction: non-magnetic stainless steel container, inner door, spray arms, strainers, spray pipes; nylon-coated steel racks; steel feet and outer base in steel.
- Wi-Fi connection.**
- Both circulation and drain pump have extra durable and quiet brushless motors.
- Fully graphical FFSTN display.
- XXL: Tallest interior tub in the market.

Performance

- Super Cleaning System™: Intensive rinsing that cleans the dishes and the machine before main wash.
- Unique 9 Spray™ system, designed for reaching every corner of the dishwasher.
- Adjustable power zones, possible to set for cleaning pots & pans or bottles & vases. Also possible to turn off.
- Turbo Combi Drying™ - fan-assisted drying **with sensor-controlled** automatic door open drying, that eliminates all humidity (DSD565 has Auto door opening drying).
- 20 years of domestic use. (Quality test: 12,500 hours, 280 cycles per year).

Programs / Options

- 9 Programs: Normal, **Auto**, Intensive, **Quick Pro**, Time, Sanitize, Rinse and Hold, Self-Cleaning, Anti-Odor.
- Washing temperatures: 124 to 158°F.
- 3 Modes: Normal, Speed, Night.
- 2 options: Automatic door opening, Delayed start (1-24 h).

Comfort / Safety

- Status Light™ indicating the progress of the program.
- Two interior LED lights.**
- The Aqua Safe™ system guarantees protection against water leaks.
- Easy installation: From front adjustable door springs (panel ready models) and rear foot (all models).

Dimensions


- Appliance dimensions (H / W / D): 32 1/4" – 34 5/16" / 23 7/16" / 22". 819 – 872 / 596 / 559 mm
- Necessary space dimensions (H / W / D): 32 5/16" – 34 3/8" / 23 5/8" / ≥22 1/16". 820 – 873 / 600 / ≥560 mm
- Length of the power cable / Location: 71 7/8", 1825 mm / Back right.
- Length of PEX inlet hose / Locknut dimensions* / Location: 64", 1625 mm / 3/4", 19.5 mm / Back left
- Length of outlet hose / Outlet diameter / Location: 59 5/8", 1515 mm / 3/4", 19.5 mm / Back left
- Custom door length / Rotation point: 27 9/16" – 31 1/2" (sliding door: 29 15/16" – 33 1/16") / 27 15/16", 700 – 800 (sliding door: 760 – 840) / 710mm).

Baskets and drawers

- Height adjustable top tray with **telescopic ball bearing rails**
- Exclusive** height adjustable upper rack
- Exclusive** lower rack
- Cutlery basket

Installation

Measurements: inches / millimetres

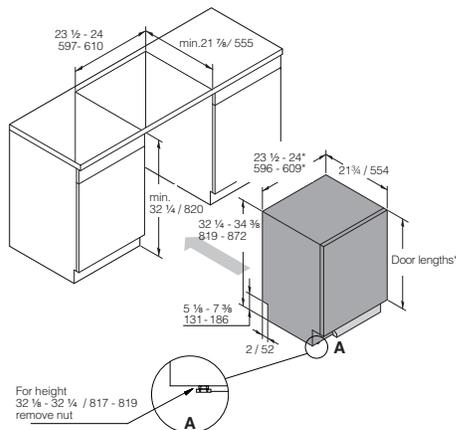

* Flexible side trims (width without side trims: 23 1/2 / 596)

** Door lengths:
Fixed door: 28 1/2 - 29 3/4 / 680 - 760
Sliding door: 27 1/2 - 31 1/2 / 700 - 800
Sliding door with Status Light: 28 3/4 - 31 1/2 / 720 - 800

