
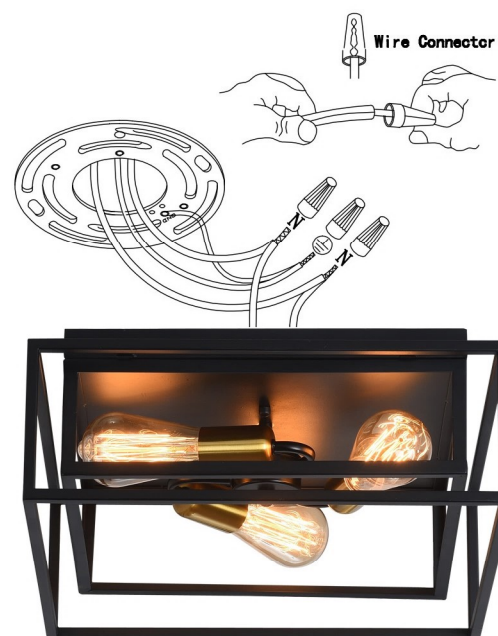


Installation Manual

1. Shut off the power at the circuit breaker and remove old fixture, including the crossbar.

2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

3. Attach the Mounting Plate to the Outlet Box (not supplied) by using 2 Outlet Box Screws.

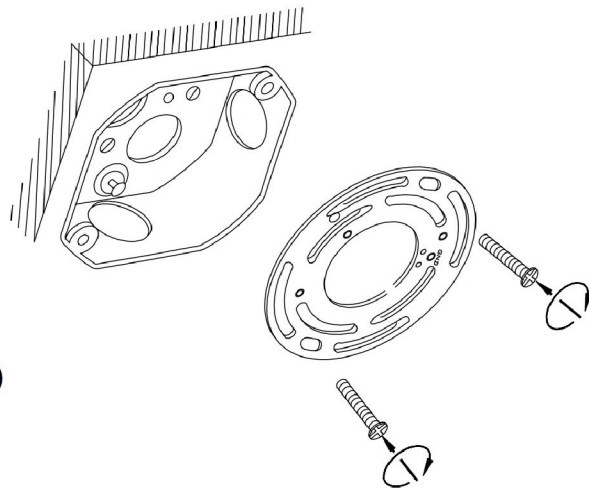

4. Connect the electrical wires as follows:

- (1) Connect the Black Wire (mark as Live Wire) from the fixture to the Black House Wire (Live Wire, also calls Hot Wire)
- (2) Connect the White Wire (Neutral Wire) from the fixture to the White House Wire (Neutral Wire). Make sure all Wire Connectors are secured. You may wrap the connections with electrical tape.
- (3) If your Outlet Box has a Ground Wire (green or bare copper), connect Fixture Ground Wire with it. Otherwise, connect Fixture Ground Wire directly to the mounting plate in the hole (mark as GND) with the Green Screw. Tuck the wire connections neatly into Outlet box.

5. Attach the Fixture to the Mounting Plate and align the holes of the canopy to the 2 Mounting Screws and get them tighten and secured by the Ball Nuts.

6. Attach E26/E27 Medium Base Light Bulb. Then turn on the power at the circuit breaker and test the light to check if it is working.