


ASSEMBLY INSTRUCTIONS



Let's get started!

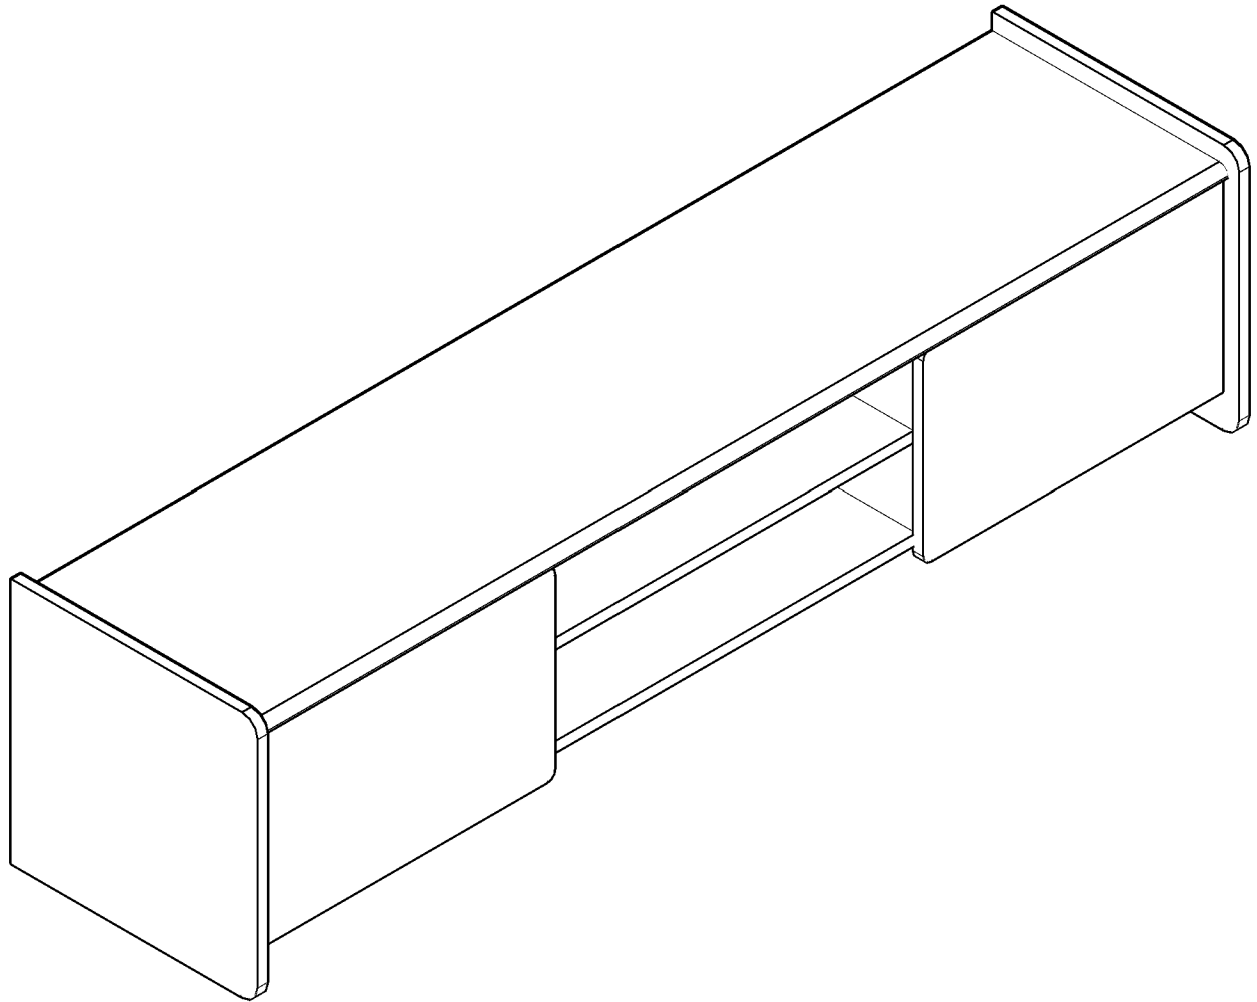

Read through all of the instructions before starting



Care instructions are listed in the last step of this manual



Approx. 60 minutes assembly time



Make sure you have all parts and components before discarding any packing materials



2 people recommended for assembly

Only use hand tools to assemble this item. Do not use power tools. Do not tighten bolts or screws completely until all hardware is lined up and inserted into the holes.


Do not over-tighten screws and bolts to avoid stripping the hardware or cracking the item.

Assemble your item on a flat, carpeted area, with plenty of space to work. This will prevent damage and scratches to your floors or the item while you're assembling the product.

Keep all components and packing out of reach of children or animals to avoid risk of choking or suffocation.

Furniture components:

- ① Top Panel x1
- ② Bottom Panel x1
- ③ Side Panel (L) x1
- ④ Side Panel (R) x1
- ⑤ Center Panel (L) x1
- ⑥ Center Panel (R) x1
- ⑦ Back Mdf Board x1
- ⑧ Shelf Panel x1
- ⑨ Door Panel x2
- ⑩ Bottom Support Panel x1

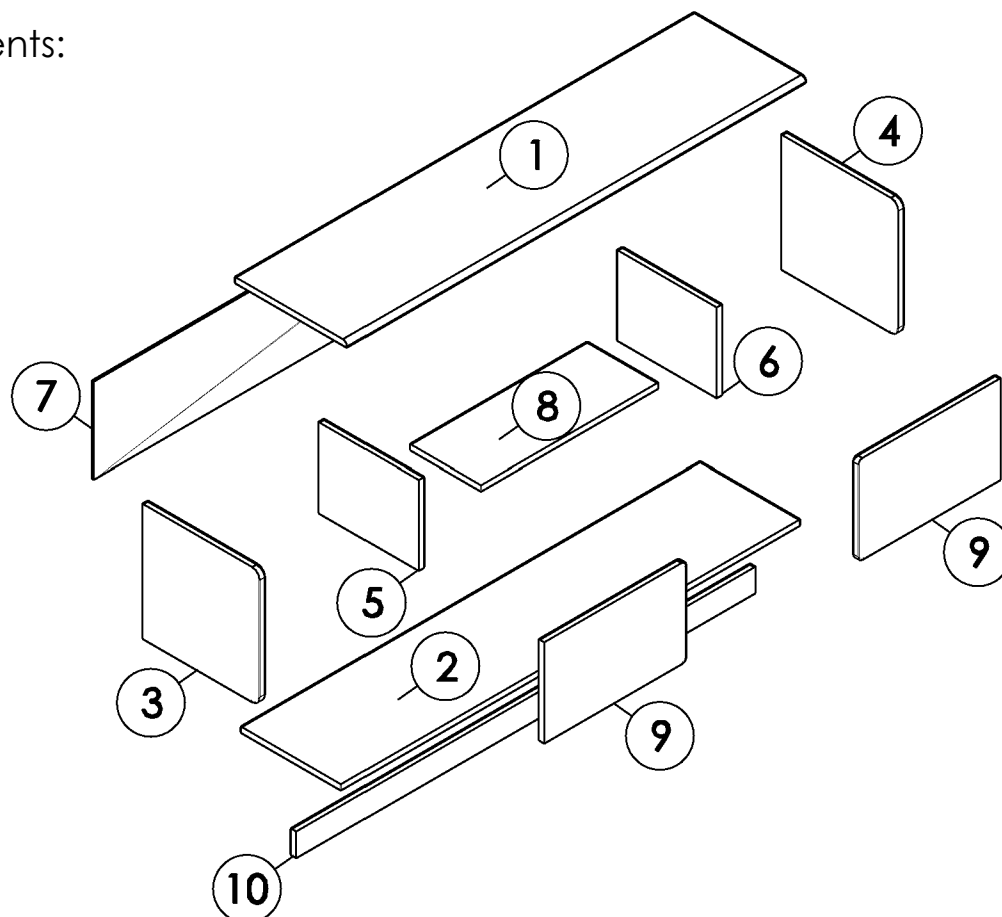

Provided hardware:



What you need:



Screwdriver


Step 1

HARDWARE :

- (A) Minifix M5x24MM x10
- (C) Wood Dowel M8x30MM x2


COMPONENTS :

- (1) Top Panel x1
- (3) Side Panel (L) x1
- (4) Side Panel (R) x1




Installation Wood Dowel :

As Shown, Please using the hammer to insert the wood dowel(C)into hole of panel.

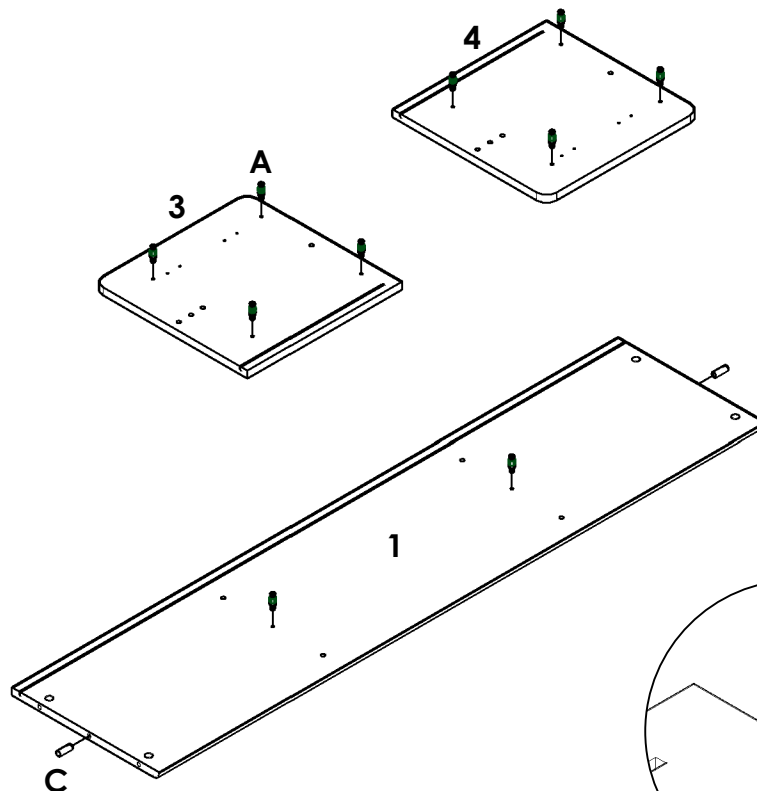

Installation Minifix Screw:

Please insert the screw on panel using a screwdriver.





Step 2

HARDWARE :

- (C) Wood Dowel M8x30MM x13
- (D) Iron Shelf Support x4


COMPONENTS :

- (2) Bottom Panel x1
- (5) Center Panel (L) x1
- (6) Center Panel (R) x1
- (10) Bottom Support Panel x1

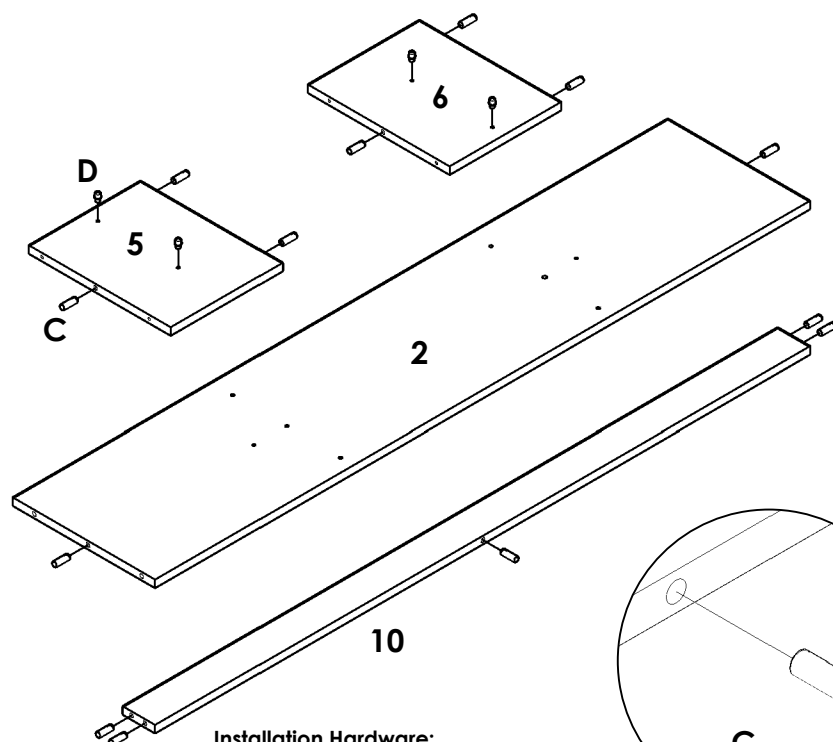

Installation Hardware:

As Shown, Please using the hammer to insert the wood dowel(C) and iron shelf support (D) into hole of panel.




Step 3

HARDWARE :

- (B) Minifix Casing x2
- (H) Screw M6x50MM x4
- (I) Allen Key x1


COMPONENTS :

- (1) Top Panel x1
- (2) Bottom Panel x1
- (5) Center Panel (L) x1
- (6) Center Panel (R) x1




Installation Screw:

Please insert the screw (H) on panel using a allen key.

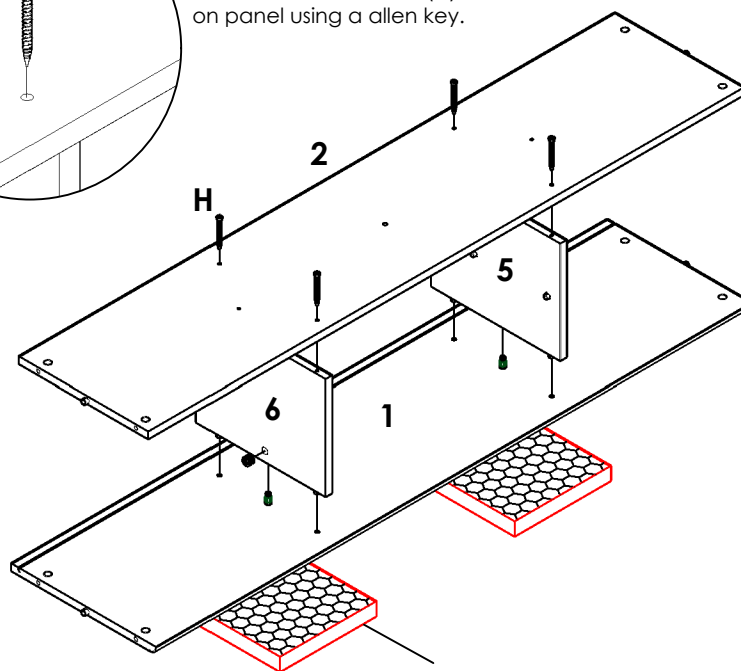

Place foam to support the panel during the installation process. Use foam in the box 347 x 250 x 32MM.



Installation:

As shown, the head of minifix housing goes into the open mouth of the mini fix bolt. Use Allen Key then turn the minifix housing so it tightens over the mini fix bolt.



Step 4

HARDWARE :

- (B) Minifix Casing x8
- (I) Allen Key x1

COMPONENTS :

- (3) Side Panel (L) x1
- (4) Side Panel (R) x1
- (10) Bottom Support Panel x1

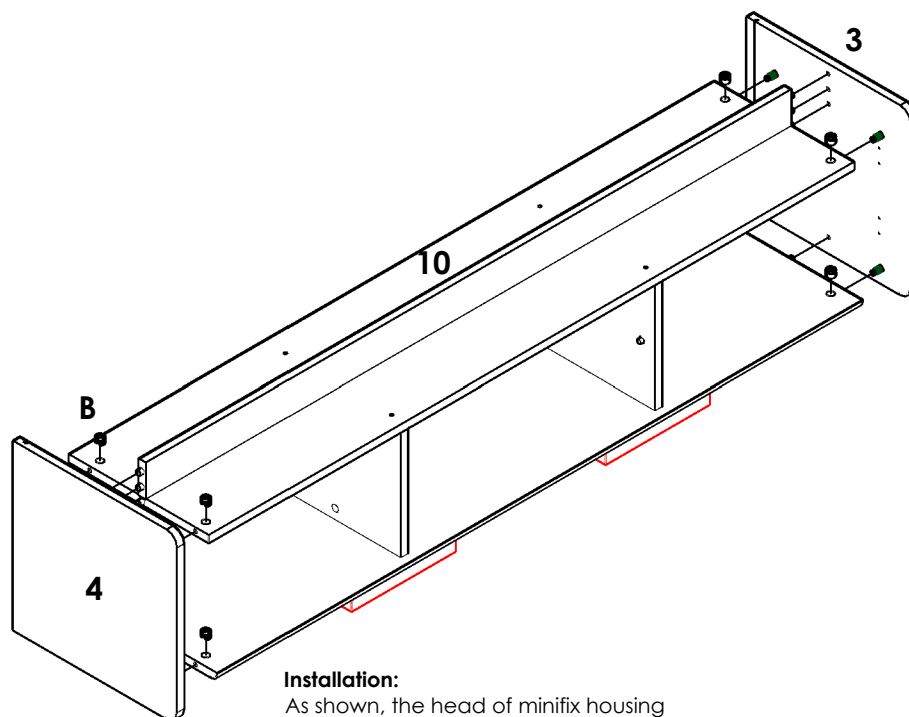

Installation:

As shown, the head of minifix housing goes into the open mouth of the mini fix bolt. Use Allen Key then turn the minifix housing so it tightens over the mini fix bolt.


Step 5

HARDWARE :



- Ⓒ Screw M3.6x16MM x9
- Ⓙ White Leg Pin x6

COMPONENTS :


- ⑦ Back Mdf Board x1



Installation Screw:
Please insert the screw (G)
on panel using a screwdriver.

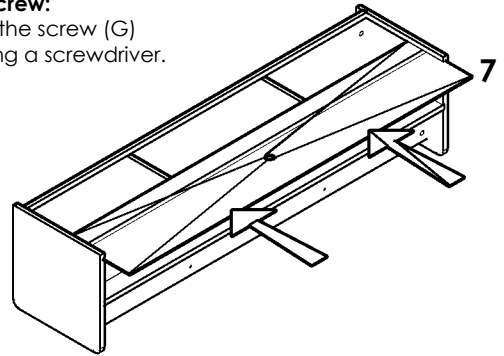

Insert White Leg Pin:
Press insert the white leg pin
on the leg panel with using hammer.

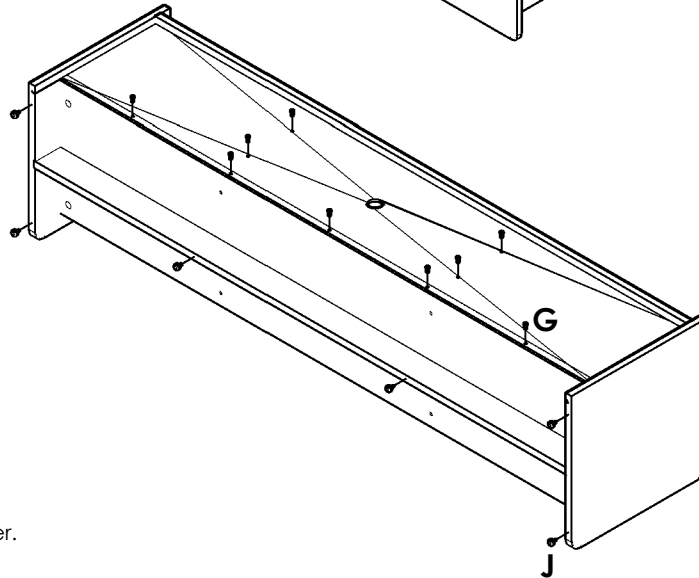


Step 6

HARDWARE :


- Ⓕ Screw M4x28MM x2

COMPONENTS :


- ⑧ Shelf Panel x1

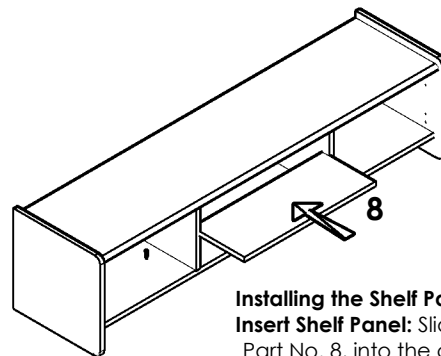

Installing the Shelf Panel:
Insert Shelf Panel: Slide the shelf panel,
Part No. 8, into the cabinet.



Installation Screw:
Please insert the screw (F)
on panel using a screwdriver.

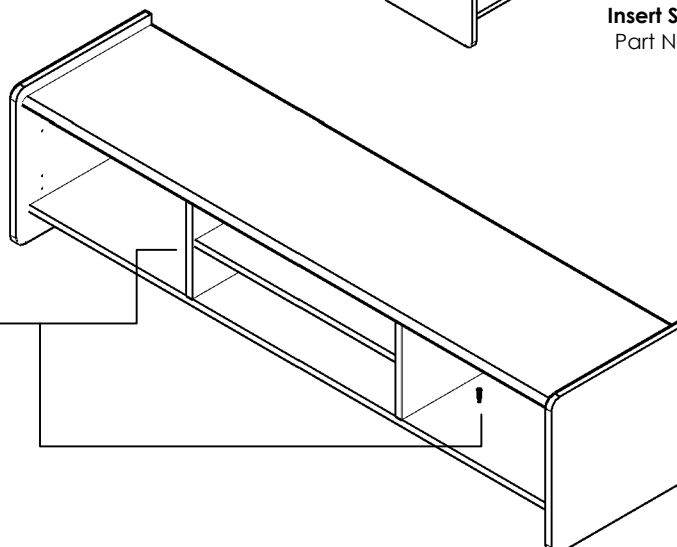

Step 8

HARDWARE :




- ⑤ Hydraulic Hinges 7/8" x4
- Screw M3.5x16MM x24

COMPONENTS :


- ⑨ Door Panel x2

Installation Hinges:



Insert the screw into the hole of the Hinges with using the screwdriver.

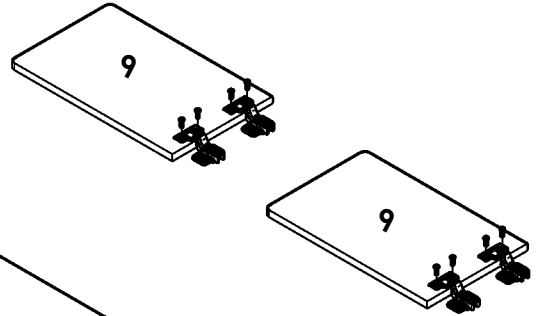

#Adjust the door by moving it up and down or left and right the tighten the screws



#Tighten the screws to prevent sliding doors

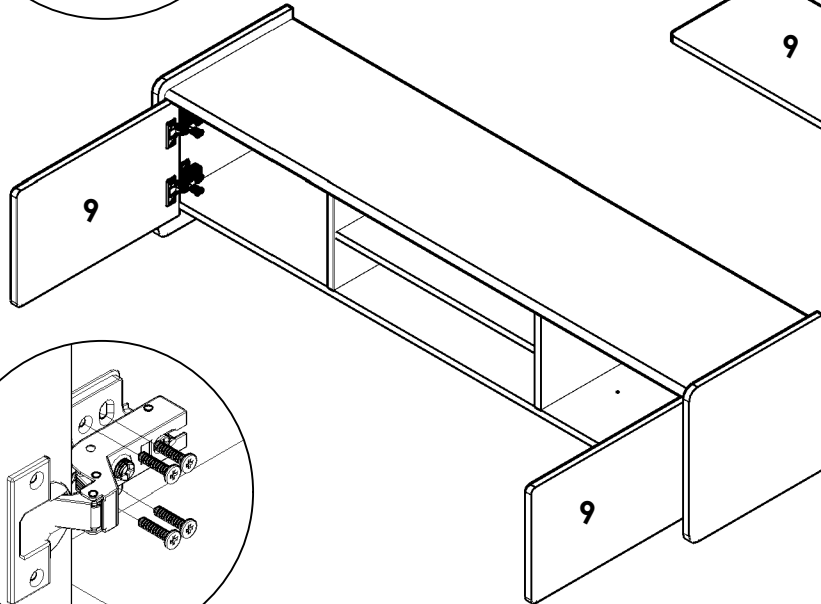

Great job!

Model Description assembly is complete.




CARING FOR YOUR ITEM

Indoor use only.

Not contract grade.

Clean using a non-abrasive cloth and a mild cleaner.

Never use harsh chemicals, as they could damage the finish or integrity of the item.

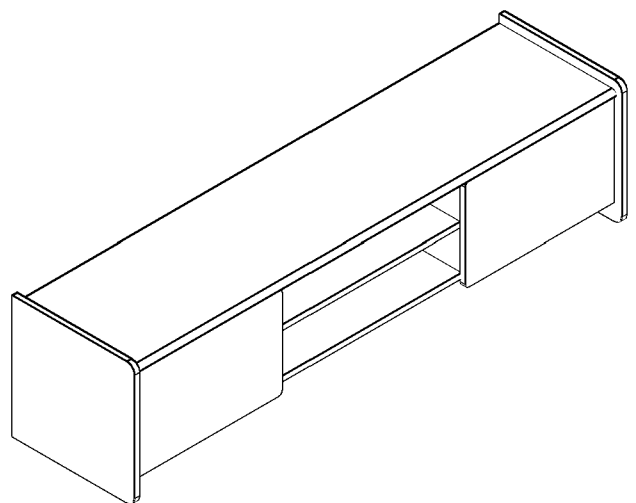





HOW TO ADJUST GLASS/DOORS

- There is a gap between the door and the shelf with doors closed

Loosen the back adjustable screw which is one of the two screws looking from the front while supporting the doors, adjust the door by moving it back and forth, then tighten the back screw.




If there is a gap between the doors on the top.



Loosen this screw, adjust by moving back and forth


- There is a gap in the middle with doors closed

Loosen the ① back adjustable screw which is one of the two screws looking from the front while supporting the doors, tighten the ② screw clockwise, then adjust the middle gap. After adjusted, tighten the ① screw.



If the gap is wide


① Fixing screw

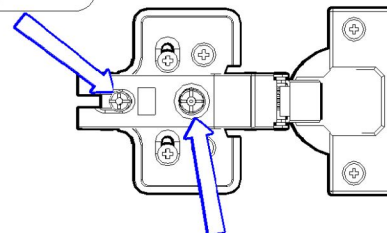

② Adjusting screw
(If you twist clockwise once, the door moves about 2mm inward)


- There is a gap on the top of the door when doors are closed
(Glass slide hinge does not require this step)
(4 screw hole hinge does not require ①)

Loosen the slide hinge screw while supporting the door, adjust the door by moving it up and down then tighten the screws.
(Please loosen the slide hinge screws of the door completely you are adjusting before moving it up and down.)

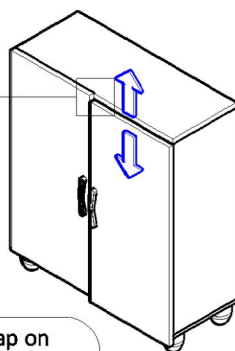

If there is a gap on the top of the door

① Open screw




② Slide hinge screws (Please loosen these screws before adjusting)

- There is a V gap when doors are closed


Loosen the ① back adjustable screw which is one of the two screws looking from the front while supporting the doors, tighten the ② screw clockwise, then adjust the middle gap. After adjusted, tighten the ① screw.

If there is a gap between the doors on the top
(Please adjust slide hinge the top part door)



If there is a gap between the doors on the bottom
(Please adjust slide hinge the bottom part door)

① Fixing screw

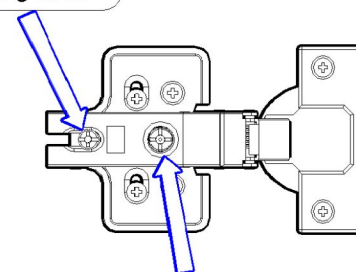

② Adjusting screw
(If you twist clockwise once, the door moves about 2mm inward)