


# FLEXLINE

## AC LED Indoor Strip

# WAC LIGHTING

Responsible Lighting®

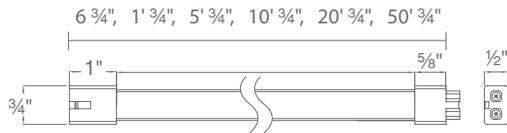

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### PRODUCT DESCRIPTION

Driver-less AC LED strip operates with line voltage. Modular connections create long runs of high lumen output. Ideal for indoor cove application.

### FEATURES

- Ultra thin profile at 5/8" W x 3/8" H
- Optimized connectors to maximize consistent across light connections.
- Four mounting options provided for different surfaces and applications
- 150 ft max run
- 120 VAC Line Voltage Input
- UV resistant.
- Per UL safety standards, line voltage strip is not field cuttable.
- Modular design available in various lengths to adapt to field conditions.
- Suitable for indoor use
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

### SPECIFICATIONS

- Construction:** Flexible, PVC extrusion strip light
- Input:** 120 VAC input 50/60 Hz
- Light Source:** 28 LEDs per foot, 95 CRI
- Dimming:** May be dimmed with electronic low voltage (ELV) dimmer 100%-10% ELV.
- Operating Temp:** -4°F to 104°F (-20°C to 40°C), relative humidity 95%.
- Standards:** UL & cUL Damp Location listed.


### ORDER NUMBER - TAPE SECTION

Model	Length	Color Temp	Lumens/ft	Watts/ft	Color
<b>LED-HVT</b>	<b>6</b> 6 inches	<b>27</b> 2700	480	5W/ft	<b>WT</b>
	<b>01</b> 1 foot				
	<b>05</b> 5 feet				
	<b>10</b> 10 feet				
	<b>20</b> 20 feet				
<b>50</b> 50 feet	<b>30</b> 3000	500			
	<b>35</b> 3500	495			


### LED-HVT-\_\_-\_\_WT

Example: LED-HVT-10-30WT

### Joiner Cable

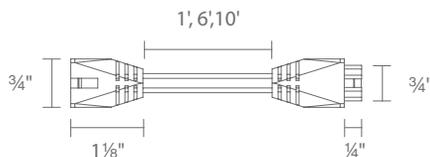

### Lead Wire

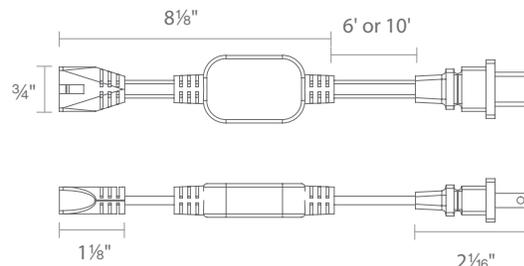

waclighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760

### Accessories

Lead Wire		<b>LED-HVT-P6-WT</b> <b>LED-HVT-P10-WT</b>	6 feet 10 feet	Lead wires with plug to power LED strip. Includes fuse and surge protection.
Joiner Cable		<b>LED-HVT-IC1-WT</b> <b>LED-HVT-IC6-WT</b> <b>LED-HVT-IC10-WT</b>	1 foot 6 feet 10 feet	Connects LED strip sections.
L Connector		<b>LED-HVT-L-WT</b>		"L" connector has male and female connectors and is used to create 90° right angles.
T Connector		<b>LED-HVT-T-WT</b>		Connects three tape sections.
Mounting Clip		<b>LED-HVT-CL1</b>	10 pcs	Secures on both edges. 2 clips per ft are recommended for straight runs. Mounting screws included.
Mounting Clip		<b>LED-HVT-CL2</b>	10 pcs	Secures on one edge. 2 clips per ft are recommended for straight runs. Mounting screws included.
Mounting Clip		<b>LED-HVT-CL3</b>	10 pcs	Secures from the underside. 2 clips per ft are recommended for straight runs. Mounting screws included.
Mounting Clip		<b>LED-HVT-CL4</b>	10 pcs	Secures two rows of LED strip from the underside. 2 clips per ft are recommended for straight runs. Mounting screws included.
Channel		<b>LED-HVT-CH</b>	5 foot 6 inches L x 1¼ inch W x 1 inch H	Mounting channel with frosted polycarbonate diffuser includes two variable angle mounting clips.