


# Assembly Instruction

**CAUTION:** Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

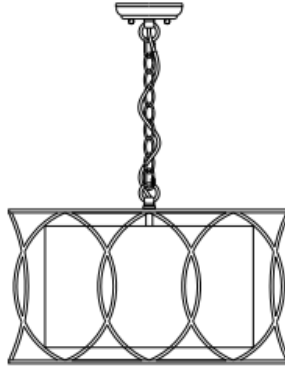

## Care and Cleaning









To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent)to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes


## Part List and Hardware List

| PIECE | DESCRIPTION   | PICTURE   | QUANTITY | PIECE | DESCRIPTION    | PICTURE   | QUANTITY |
|-------|---------------|---|----------|-------|----------------|---|----------|
| A     | Bulb          |  | 1X       | E     | Canopy         |  | 1X       |
| B     | Lamp Body     |  | 1X       | F     | Mounting Plate |  | 1X       |
| C     | Pendant Chain |  | 1X       | G     | Wire Nut       |  | 3X       |
| D     | Canopy Nut    |  | 2X       | H     | Mounting Screw |  | 2X       |

# Installation


## Step 1

Unpack all parts from cartons carefully.  
Using Wire nut(G) to connect wires

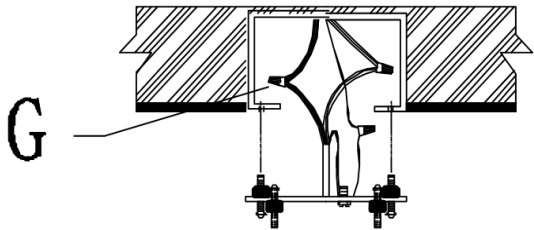

## Step 2 Wire connection

| Connect,Hot,Black or Red outlet Supply Wire to:           | Connect,Neutral,White Outlet Supply Wire to:             |
|---|--|
| Black   | White  |
| *Parallel Cord(round&smooth)                              | *Parallel Cord(square&ridged)                            |
| Clear,Brown,Gold or Black without Tracer(colored stripes) | Clear,Brwn,Gold or Black without Tracer(colored stripes) |
| Insulated Wire(not green)with copper metal conductor      | Insulated Wire(not green)with Silver metal conductor     |



\*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)




### Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw (F) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.


## Step 3

Fix the Mounting Plate(F) to the junction box with Mounting Screw (H).

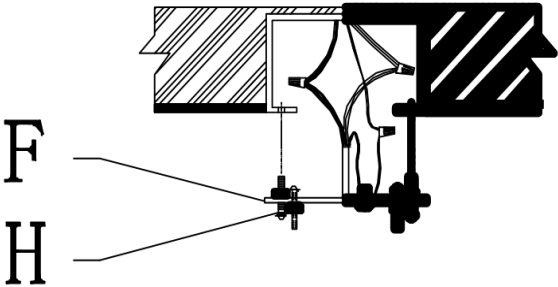

## Step 4


Attach the Canopy(E) to the Mounting Plate (F) and fix it by turning the Canopy Nut (D) clockwise.

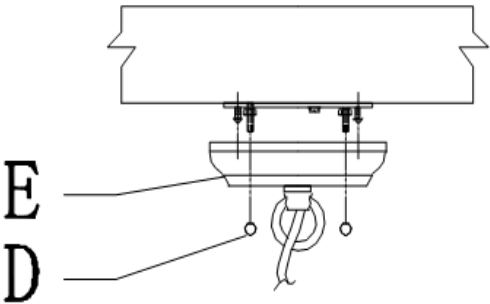

## Step 5


Attach the Closable Link(C) onto the Hanging Loop at the bottome of Conapy(E)

Attach the Closable Link(C) onto the Hanging Loop at the top of lamp body(B)

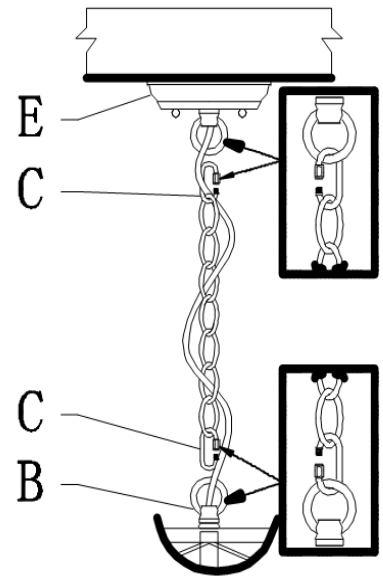

## Step 6

Install bulbs (A). Be sure to use bulb with wattage no greater than specified on this fixture

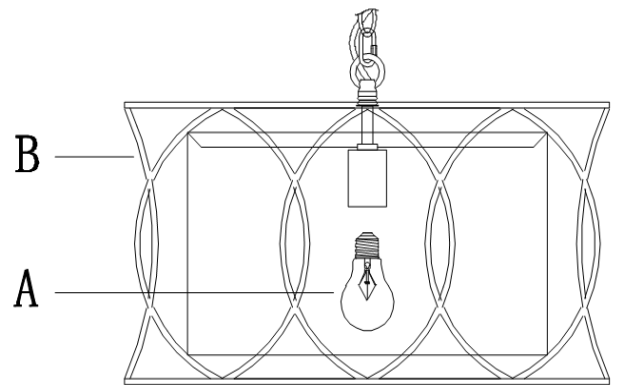

**PLEASE USE ON/OFF TYPE "A" BULB MAX 100-WATT OR CFL BULB MAX 23-WATT  
THERE IS 13-WATT CFL BULB IN THE BOX**

## Step 7

Consult a qualified electrician to ensure correct branch circuit conductor

**ENJOY YOUR LAMP**